
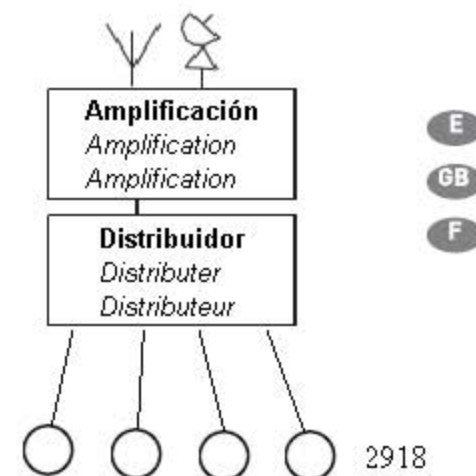


REF. 2918

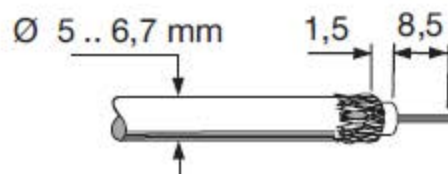

**Características técnicas / Technical specifications / Caractéristiques techniques**

<b>Margen de Frecuencias</b> <i>Frequency Margin</i> <i>Gamme de Fréquences</i>		( MHz )	5 - 47	47 - 862	950 - 2400
<b>Atenuación</b> <i>Atenuación</i> ( dB ) <i>Atténuation</i>	IN -> <b>Salida TV</b> / TV Output / <i>Sortie TV</i>	< 8	4,5 ± 2	> 9	
	IN -> <b>Salida SAT</b> / SAT Output / <i>Sortie SAT</i>	> 8	> 6	1,5 ± 1(*)	
	IN -> <b>Salida R</b> / R Output / <i>Sortie R</i>	< 8	4,5 ± 2	> 9	
<b>Planicidad</b> <i>Flatness / Platitude</i> ( dB )	IN -> <b>Salida TV</b> / TV Output / <i>Sortie TV</i>	< 3	< 3	—	
	IN -> <b>Salida SAT</b> / SAT Output / <i>Sortie SAT</i>	—	—	< 3	
<b>Rechazo entre salidas</b> <i>Output rejections</i> ( dB ) <i>Rejet entre les sorties</i>	TV - SAT	> 8	> 10	> 8	
	TV - R	> 8	> 8	> 9	
<b>Paso DC</b> <i>DC Pass</i> ( mA ) <i>Etape DC</i>	<b>Salida TV</b> / TV Output / <i>Sortie TV</i>		—		
	<b>Salida FI</b> / FI Output / <i>Sortie FI</i>		350		
	<b>Salida R</b> / R Output / <i>Sortie R</i>		—		