

# BJC

## General Catalogue

No. 155



Mechanism series



Smart Home



Reles



Assorted material



Cetac



Watertight surface-mounting



Assembled and connection boxes



**100**  
**100 YEARS**  
ALWAYS FORWARD

**BJC**

General Catalogue



|                                                             |                                                                   |     |
|-------------------------------------------------------------|-------------------------------------------------------------------|-----|
| Introduction                                                | 01 - Introduction                                                 | 6   |
| BJC Nexus                                                   | 02 - BJC Nexus                                                    | 14  |
| Mechanism series                                            | 03 - Iris, Iris Plus and Mega                                     | 34  |
|                                                             | 04 - Style                                                        | 106 |
|                                                             | 05 - Miro                                                         | 132 |
|                                                             | 06 - Viva                                                         | 168 |
|                                                             | 07 - Coral                                                        | 192 |
|                                                             | 08 - Sun and Rehabitat                                            | 208 |
|                                                             | 09 - Relays                                                       | 218 |
|                                                             | 10 - Assorted material                                            | 226 |
| Relays                                                      | 11 - Cetact                                                       | 230 |
| Assorted material                                           | 12 - Watertight surface-mounting connection boxes and accessories | 240 |
| Cetact                                                      | 13 - Assembled and connection boxes                               | 244 |
| Watertight mounting boxes, connection boxes and accessories | 14 - Technical specifications                                     | 253 |
| Assembled and connection boxes                              | 15 - Discontinued products and reference index                    | 274 |
| Technical information                                       |                                                                   |     |
| Discontinued products and reference index                   |                                                                   |     |



# BJC and ELKO EP

BJC is part of the European ELKO EP group, which specialises in innovative solutions for building automation and control. This alliance reinforces BJC's commitment to quality, design and technology, opening up new opportunities for international growth and development, without losing sight of the core values that define the brand.

BJC

100 years designing and manufacturing professional products for the electrical equipment sector with outstanding reliability and sleek, ergonomic designs. Our history is marked by innovation, industrial design and a strong commitment to quality.

Today, we are proud that all of our manufacturing still takes place in Spain, thus ensuring the quality, proximity, and sustainability of each of our products and components.

The reliability of our products is no accident. It is the result of a mindset of continuous improvement, attention to detail and a passion for getting things right from the start.



ELKO EP is a European group based in the Czech Republic. We are highly specialised in electronic and electromechanical solutions for smart homes, industrial automation and the hotel industry.

It has 16 sites that export to over 70 countries, combining state-of-the-art technology, in-house manufacturing in the EU and a proven track record in developing innovative products since 1993.

One of the group's strengths is innovation, especially in the design of one-way switches, electronic relays, and smart home and smart building solutions.



# Figures and statistics



## Specialised European manufacturing

SPECIALISTS IN ELECTRICAL SYSTEM CONTROL



470 employees in our holding company



AUTOMATED EUROPEAN PRODUCTION



STOCK AND COMMERCIAL AND TECHNICAL SUPPORT IN SPAIN



ELKO GROUP

- 2 design and production centres
- Directly present in 12 countries, with franchises in 6 other countries
- Sold in 70 countries



TWO R&D CENTRES

(Spain and Czech Republic)  
40 engineers continuously developing and improving products



TEST LABORATORY

certified according to EN ISO/IEC17025



OUTSTANDING QUALITY,

allowing us to offer a 5-year warranty on our products





# A long track record, always looking to the future

100 years of history. A century of innovation.

In 1926, in a small metal workshop, **Buenaventura Josa Camarasa** founded more than just a company; he made a commitment to excellence that continues to this day after 100 years. Our story is an ongoing quest: for the ability to evolve, to understand each new era and develop **real solutions for people**.


From those humble beginnings to becoming **industry leaders**, BJC has been a witness to and catalyst for a transformation in our spaces. A journey marked by key milestones, such as our historic decision in 1975 to focus on industrial design, under the guidance of **André Ricard**, who shaped our identity: reliability, stylish design and ergonomics.

Today, as part of the European group **ELKO EP**, our outlook is more global than ever, but we have remained true to our original spirit. We manufacture everything in Spain with the precision and quality that is only possible with **decades of experience and continuous innovation**.

**We are marking our 100th anniversary**, not only celebrating everything we have built, but also reaffirming our purpose: to continue designing the space where technology meets comfort.

“

Our history has been built on the rigour that comes with experience and a quest to continuously learn; a century of commitment to manufacturing solutions that now set the standard for quality in every home.

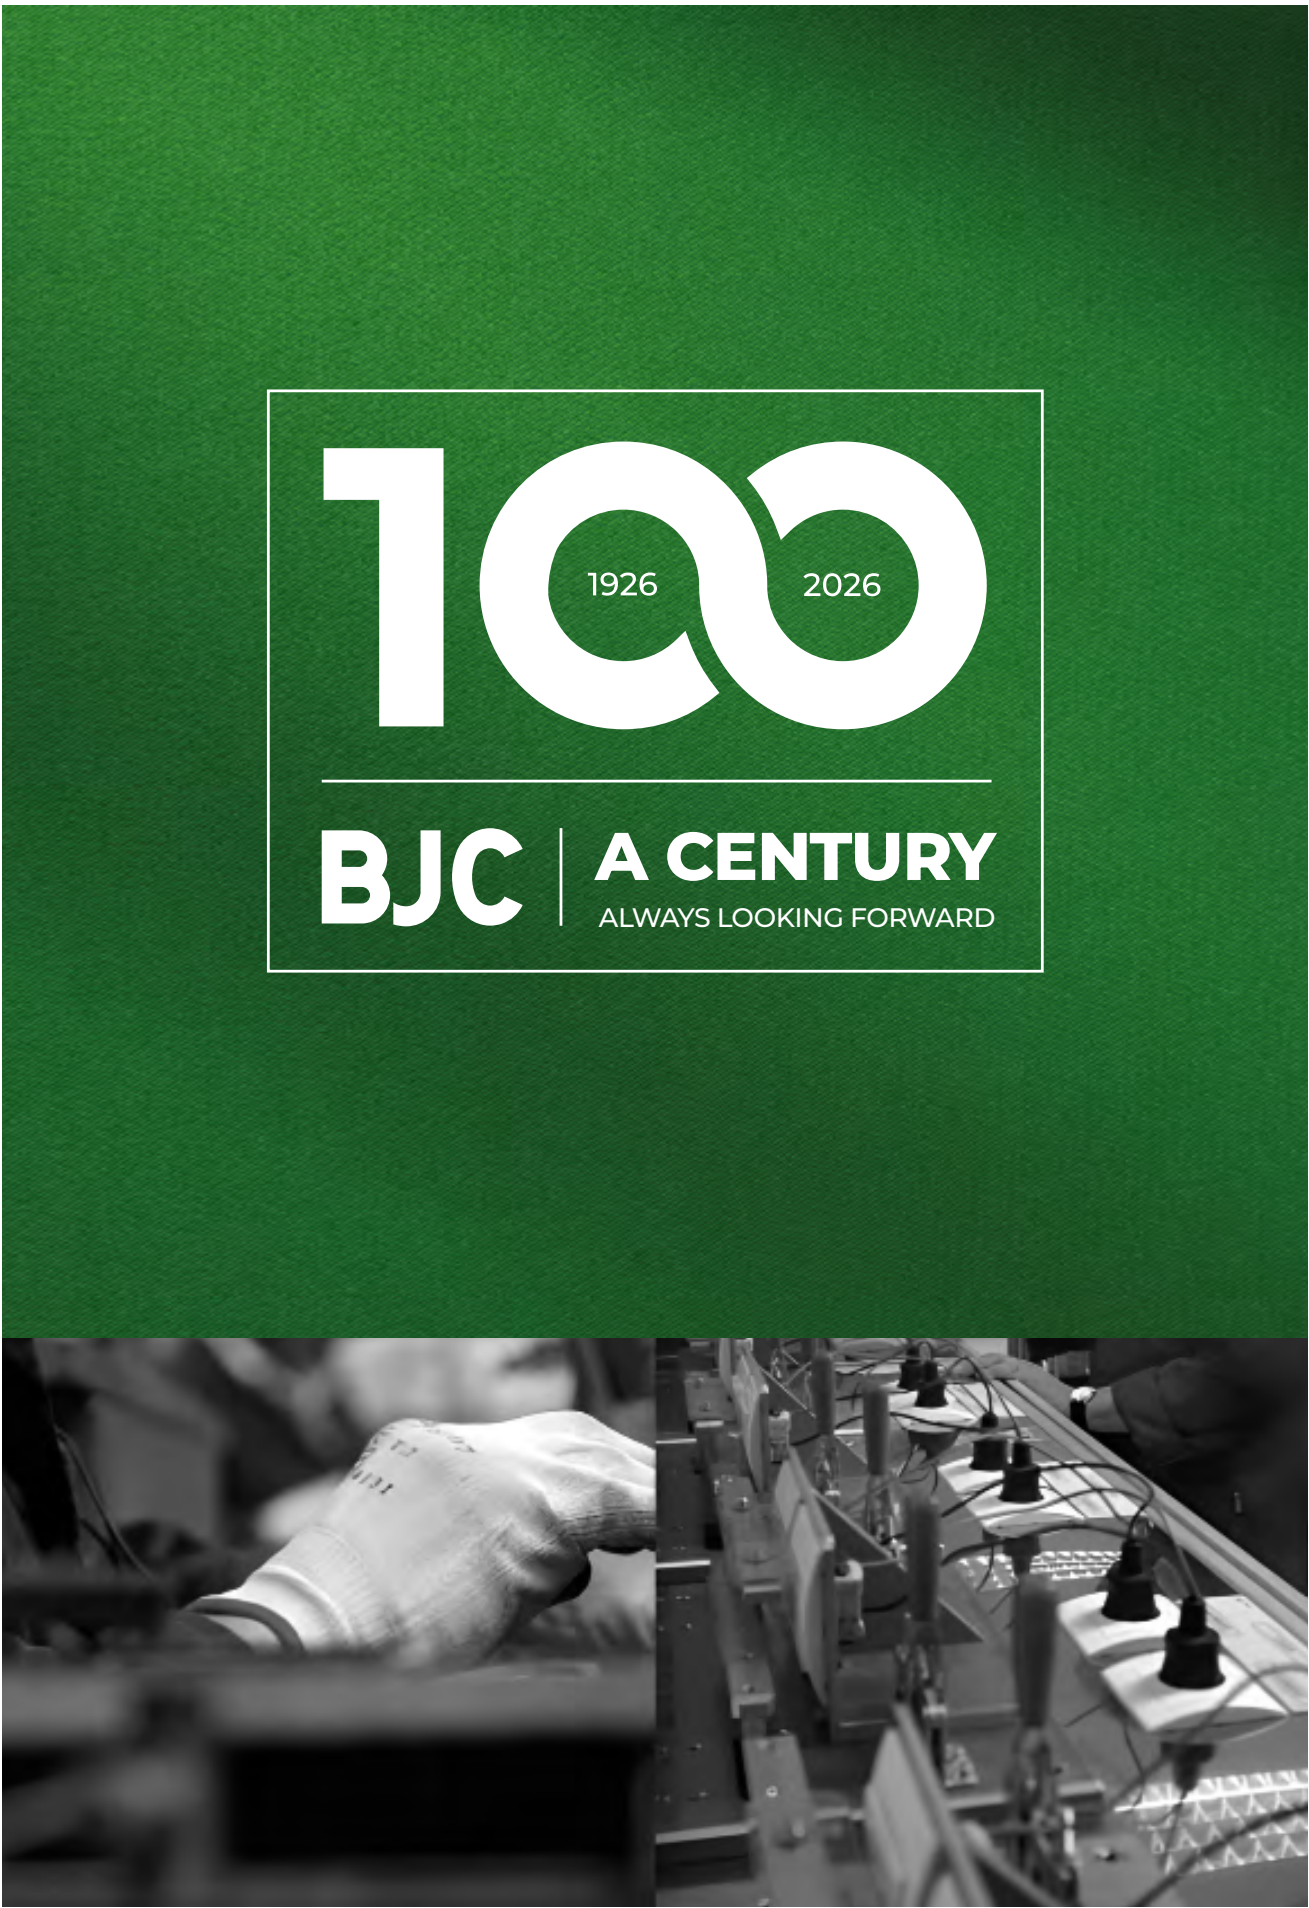



# Our values

## People creating solutions for people

At BJC, we are much more than a brand with a history. We are a team of dedicated people who have shared a common vision for 100 years: create solutions that improve the lives of those around us. These are the values that define us:

### PEOPLE-CENTRIC

We work with and for people. Every product, every decision and every step we take is designed to make life easier for those who use, install and rely on our electrical mechanisms.

### COMMITMENT TO QUALITY

The reliability of our products is no accident. It is the result of a mindset of continuous improvement, attention to detail and a passion for getting things right from the start.

### SERVICE-ORIENTED

Our entire team, from the factory floor to the sales network, is dedicated to providing personal, agile, and efficient service. We listen to the client, understand their needs, and provide real answers.

### RESPECT FOR THE ENVIRONMENT

We create value with responsibility. Our environmental policy prioritises resource efficiency and pollution prevention, without ever compromising quality or innovation.

### TEAM PRIDE

The real driving force behind BJC is its people. Their involvement, professionalism and constant development have enabled us to grow, evolve and maintain our position as a brand recognised for its quality and responsibility.

Thanks to those of you who are part of this story - employees, customers, collaborators - we continue to build a future true to our values, with the same enthusiasm as when we began.



## Tailored solutions

**BJC**

Choose the option that best suits your needs and combine it with your preferred design and material. Always with the BJC guarantee of safety and quality. Choose from over eight different designs and a wide range of finishes to create the perfect combination. You create, you choose. With BJC, your choices are limitless.



**Mega**



**Iris**



**Viva**



**Iris Plus**



**Style**



**Miro**






## Connect with your home

With BJC Nexus, your home becomes part of you. BJC Nexus keeps the timeless look of the MIRO range: clean lines, refined surfaces, and a style that fits every home. But everything inside is brand new. Smarter electronics, smooth control, and full integration with the BJC Nexus app. So you don't have to choose between beauty and technology: now you can have both.

**BJC Nexus** connect with your home.



Smart Home 

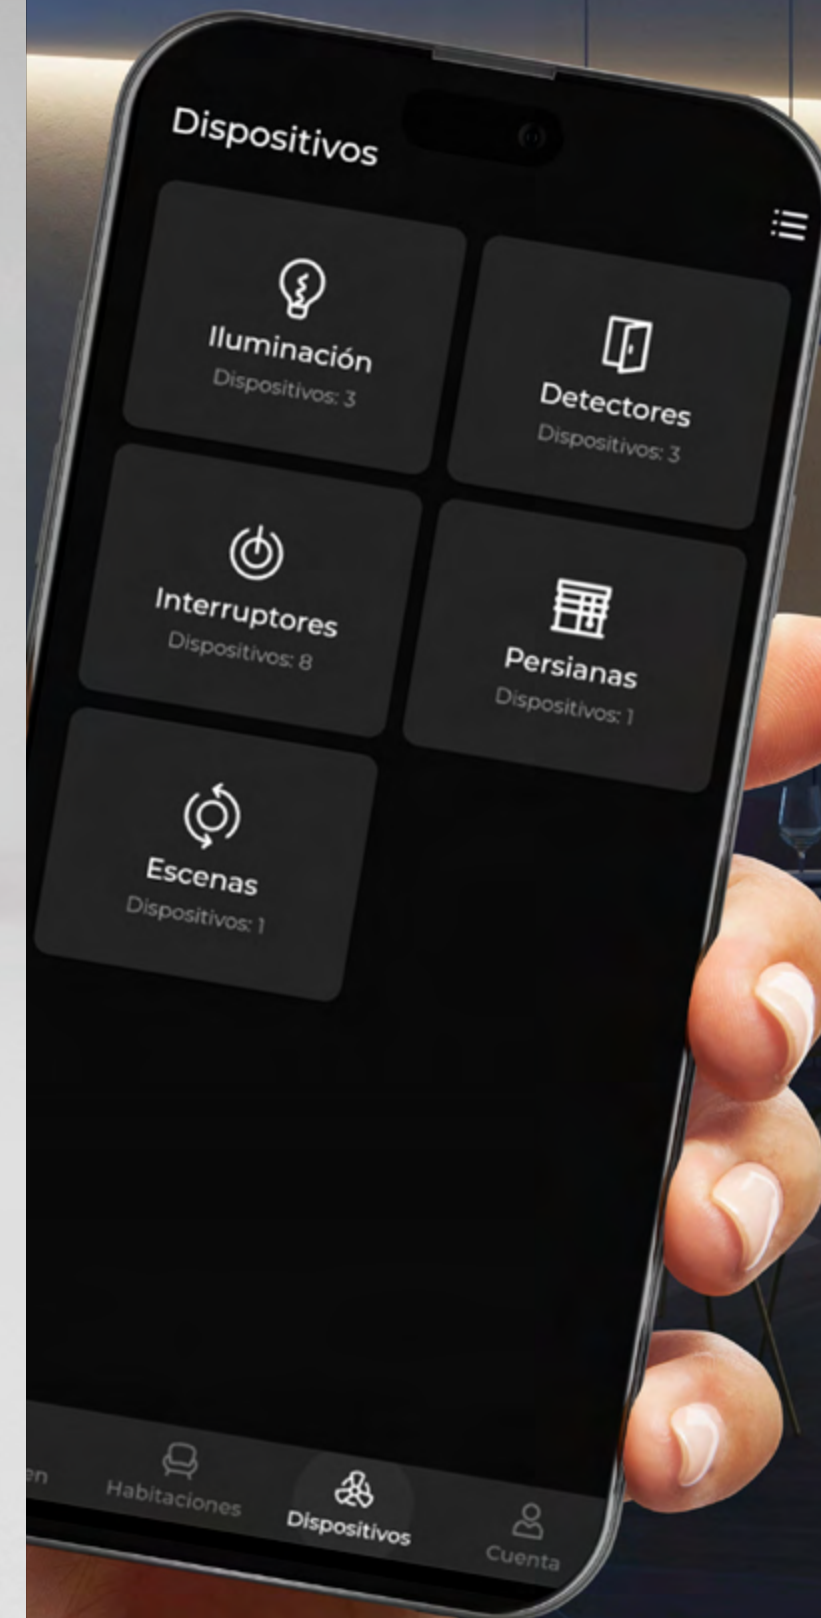



## ADVANTAGES OF BJC NEXUS

We make it easy for you



### WIRELESS SYSTEM

Easy to install and convert existing systems without the need for wiring thanks to its wireless system.



### LOWER CONSUMPTION

BJC Nexus is an intelligent system designed for protection and energy efficiency.



### VERSATILE LOOK

Based on the Miro range with clean lines and refined surfaces, you'll have numerous styling options.



### FULL CONTROL

With BJC Nexus you can easily and efficiently control lights, blinds and sockets.



### FROM ANYWHERE

Control your home with the app, whether you are at home or anywhere else in the world.



### NO NEED FOR BUILDING WORK

The wireless push-buttons allow you to add a new light source control point without the need for building work.



## CONNECTED MIRO

MIRO combines all your home devices in one ecosystem. Control it with the app, create scenes, or let the system adapt automatically to your routines.



The floating frame seems to be suspended in mid air, visual lightness.



The frame is only 8 mm high.



Square and compact switch diffuser, blue LED lighting.



Switches with or without an embellisher, to be chosen by the interior designer.




BJC | nexus



SMART DEVICES

New technology for lighting, blinds, sockets and much more

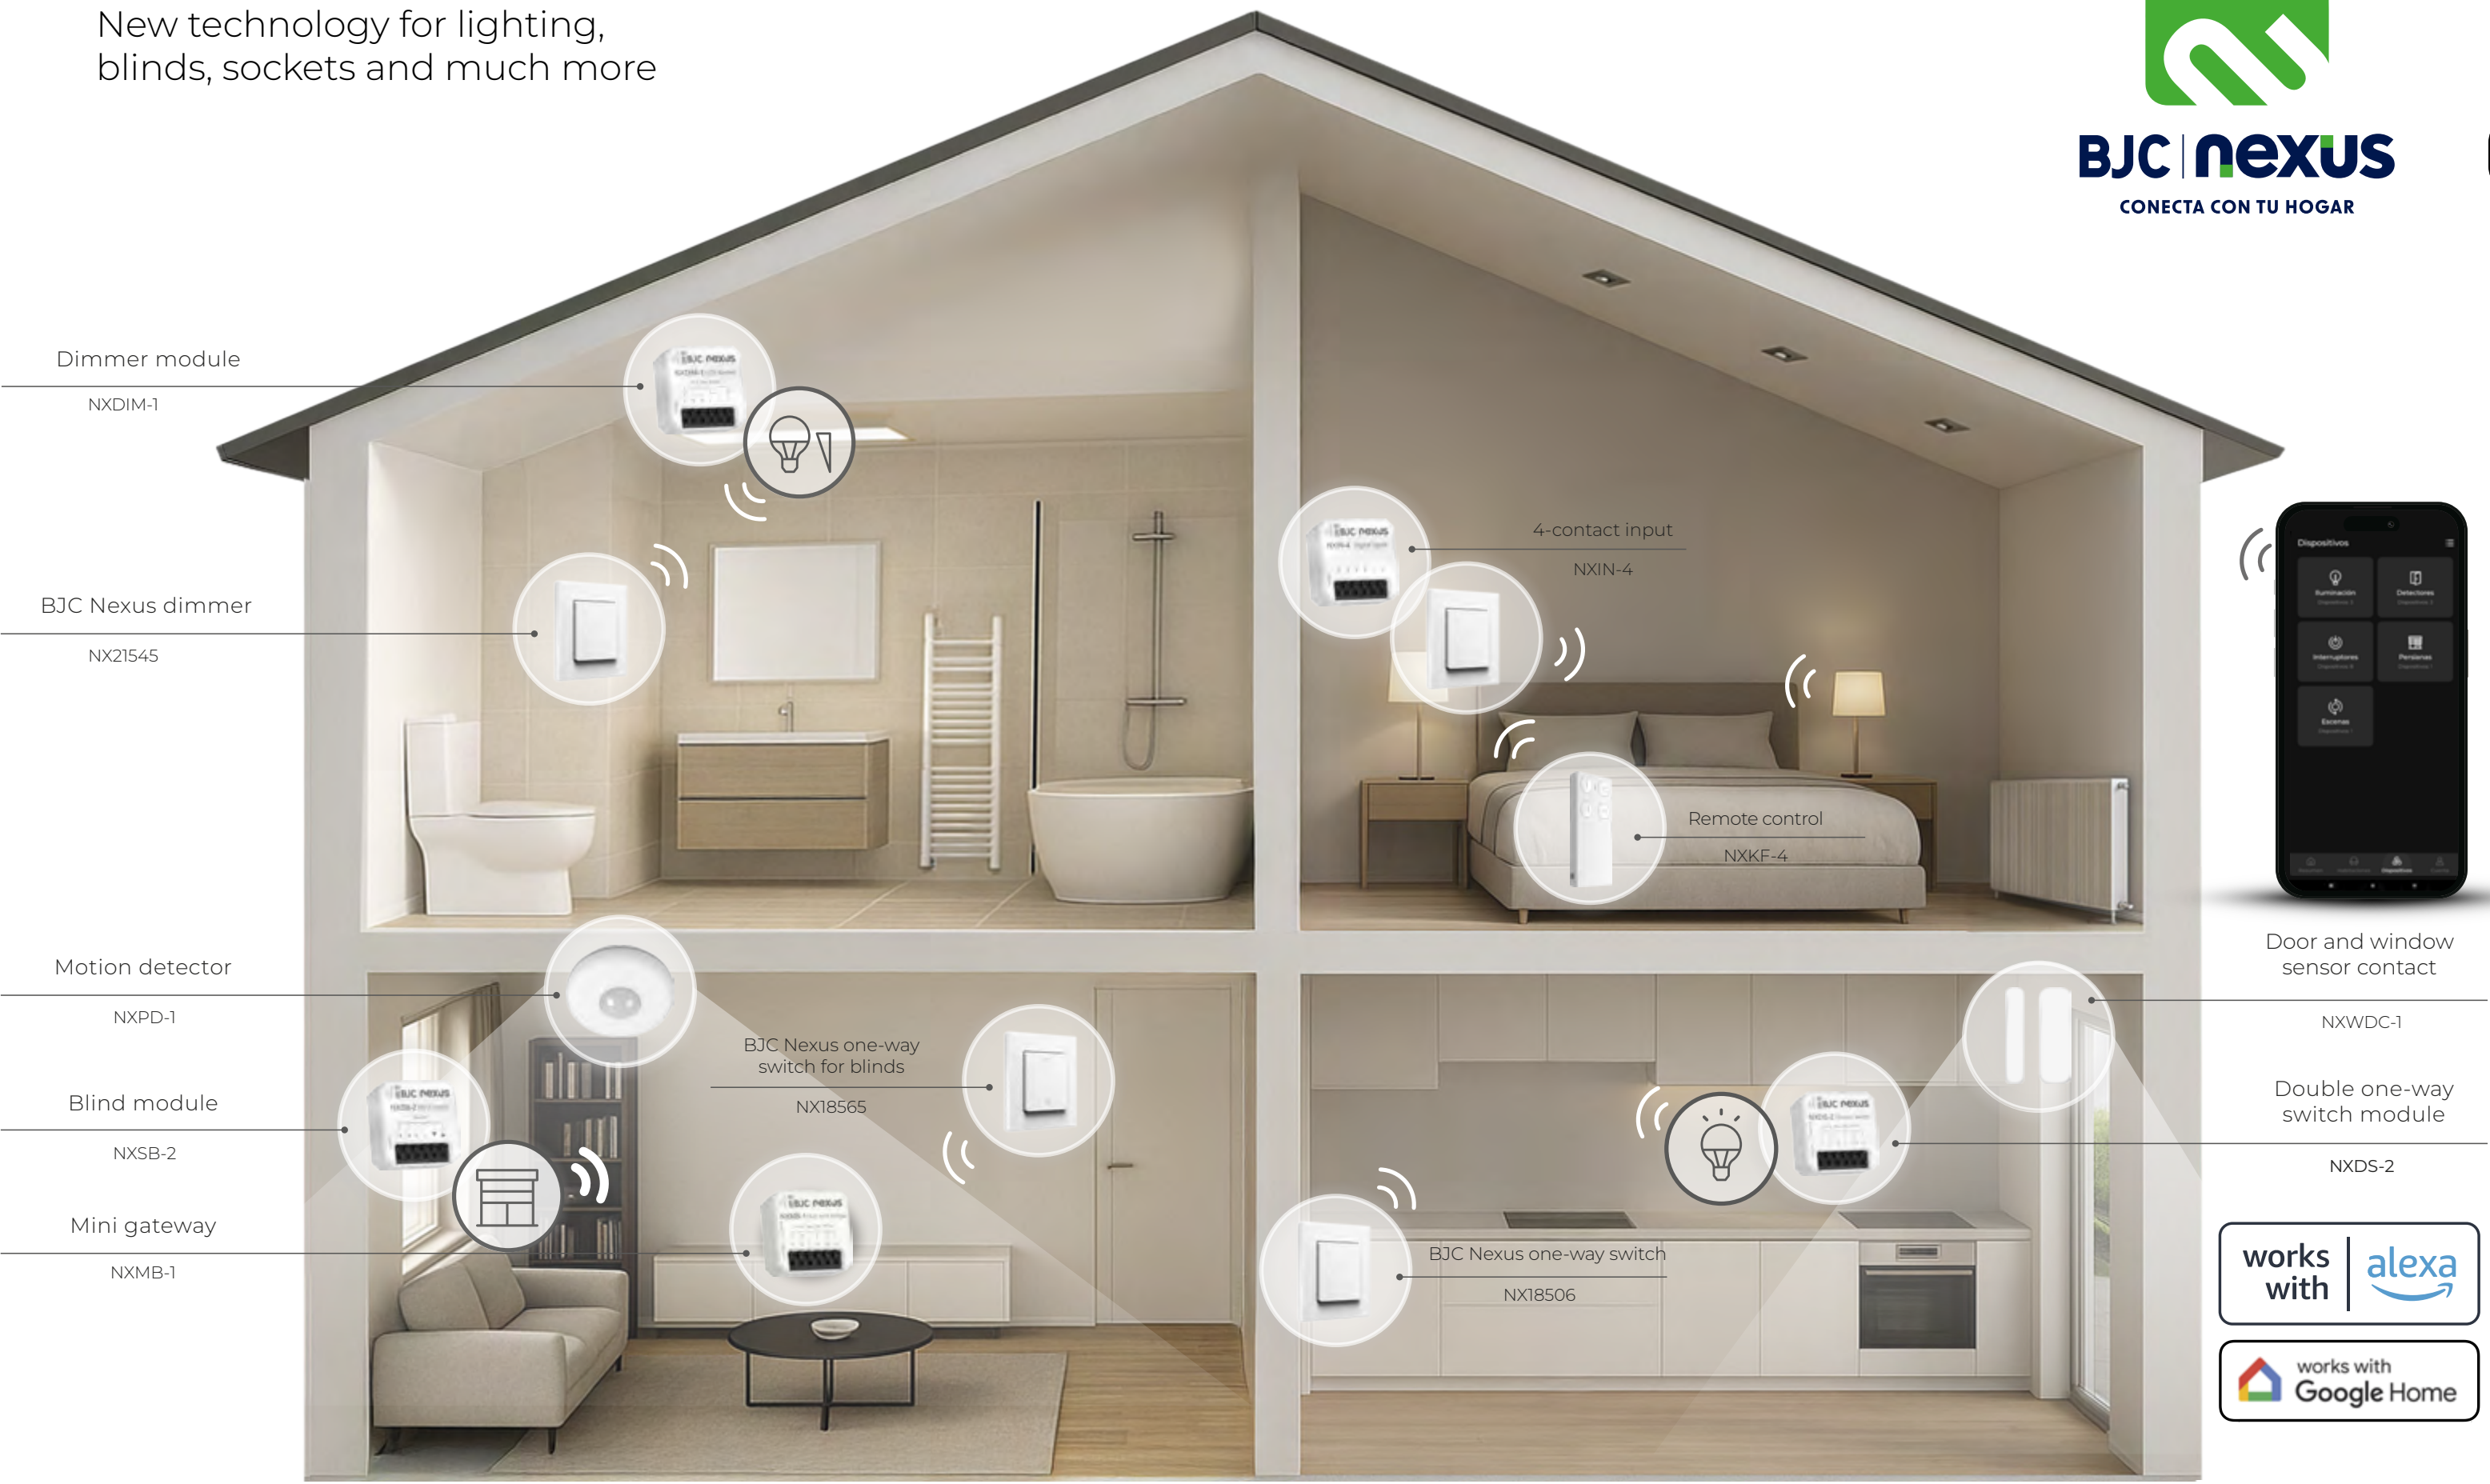

Dimmer module

NXDIM-1

BJC Nexus dimmer

NX21545

Motion detector

NXPD-1

Blind module

NXSB-2

Mini gateway

NXMB-1

BJC Nexus one-way switch for blinds

NX18565

BJC Nexus one-way switch

NX18506

4-contact input

NXIN-4

Remote control

NXKF-4

Door and window sensor contact

NXWDC-1

Double one-way switch module

NXDS-2



Silent power

BJC NEXUS brings elegance and convenience to your home without the need for renovations. Based on our tried-and-tested MIRO design, this fully wireless system controls lights, blinds, sockets, etc. all in a single, tidy ecosystem.

Colours available

Polar White

Aluminium Metallic

Carbon Metallic

Matt White

Matt Black



Smart flush-mounted mechanisms (with frame and switch)

One-way switch  
NX59906

Universal dimmer  
NX59949

Blind control  
NX59965

Schuko socket  
NX59924

Polar White mounted (available in other colours when purchasing the cover separately)

Smart flush-mounted mechanisms

One-way switch  
NX18506

Blinds  
NX18565

Universal LED light dimmer  
NX21545

Schuko  
NX18524

|                | Polar White | Aluminium Metallic | Carbon Metallic | Matt White | Matt Black |
|----------------|-------------|--------------------|-----------------|------------|------------|
| One-way switch | SM59705     | SM59705-AM         | SM59705-CM      | SM59705-BM | SM59705-NM |
| Blind switch   | SM59705     | SM59705-AM         | SM59705-CM      | SM59705-BM | SM59705-NM |
| Dimmer switch  | SM59765     | SM59765-AM         | SM59765-CM      | SM59765-BM | SM59765-NM |
| Schuko cover   | SM59724     | SM59724-AM         | SM59724-CM      | SM59724-BM | SM59724-NM |

Wireless sensors (battery powered)

Motion detector  
NXPD-1

Door/window detector  
NXWDC-1

Flood detector  
NXSF-1

Remote control  
NXKF-4

Surface push-buttons (battery powered)

Simple (2 buttons)  
NX59939

Two-scene switch  
SM59739-1

Day/night switch  
SM59739-2

In/out switch  
SM59739-3

Double (4 buttons)  
NX59940

4-scene switch  
SM59740-1

Polar White mounted (available in other colours when purchasing the cover separately)

Actuator modules

One-way switch  
NXOS-1

Double one-way switch  
NXDS-2

Blind module  
NXSB-2

Module  
NXDALI-32

Universal dimmer  
NXDIM-1

4 digital inputs  
NXIN-4

Gateways

Mini gateway + double one-way switch  
NXMB-1

Desktop gateway  
NXLAN-204



Discover the advantages of BJC Nexus in our video





Professional devices for smart homes



**On/off**  
Instantly switch devices on or off, whether they be lights, sockets, or other connected devices.



**Smart blind control**  
Open, close, or adjust your blinds for greater comfort, privacy or to get the exact right amount of sunlight.



**Ambient lighting**  
Set the perfect brightness and colour to suit every mood. Create cosy evenings, bright mornings or vibrant workspaces with ease.



**Socket control**  
Control any plugged-in device, from chargers to appliances, without leaving the sofa.



**Installation requires no building work**  
BJC Nexus surface-mounted mechanisms can be installed without the need for any building work.



**NXMB-1 mini gateway**  
The only solution of its kind on the market. Dual Wi-Fi relay with control inputs and a gateway for other BJC Nexus devices in a single unit.

Designed to suit any project

CONNECTED MIRO  
Dimmer  
Matt White

CONNECTED MIRO  
One-way switch  
Aluminium Metallic

CONNECTED MIRO  
One-way switch for blinds  
Carbon Metallic

CONNECTED MIRO  
Schuko®  
Polar White


CONNECTED MIRO  
Double one-way switch  
Carbon Metallic

CONNECTED MIRO  
2-scene  
Matt Black

CONNECTED MIRO  
Day/night scene  
activation  
Polar White

CONNECTED MIRO  
Entry/exit scene  
activation  
Matt White

BJC NEXUS operating diagram

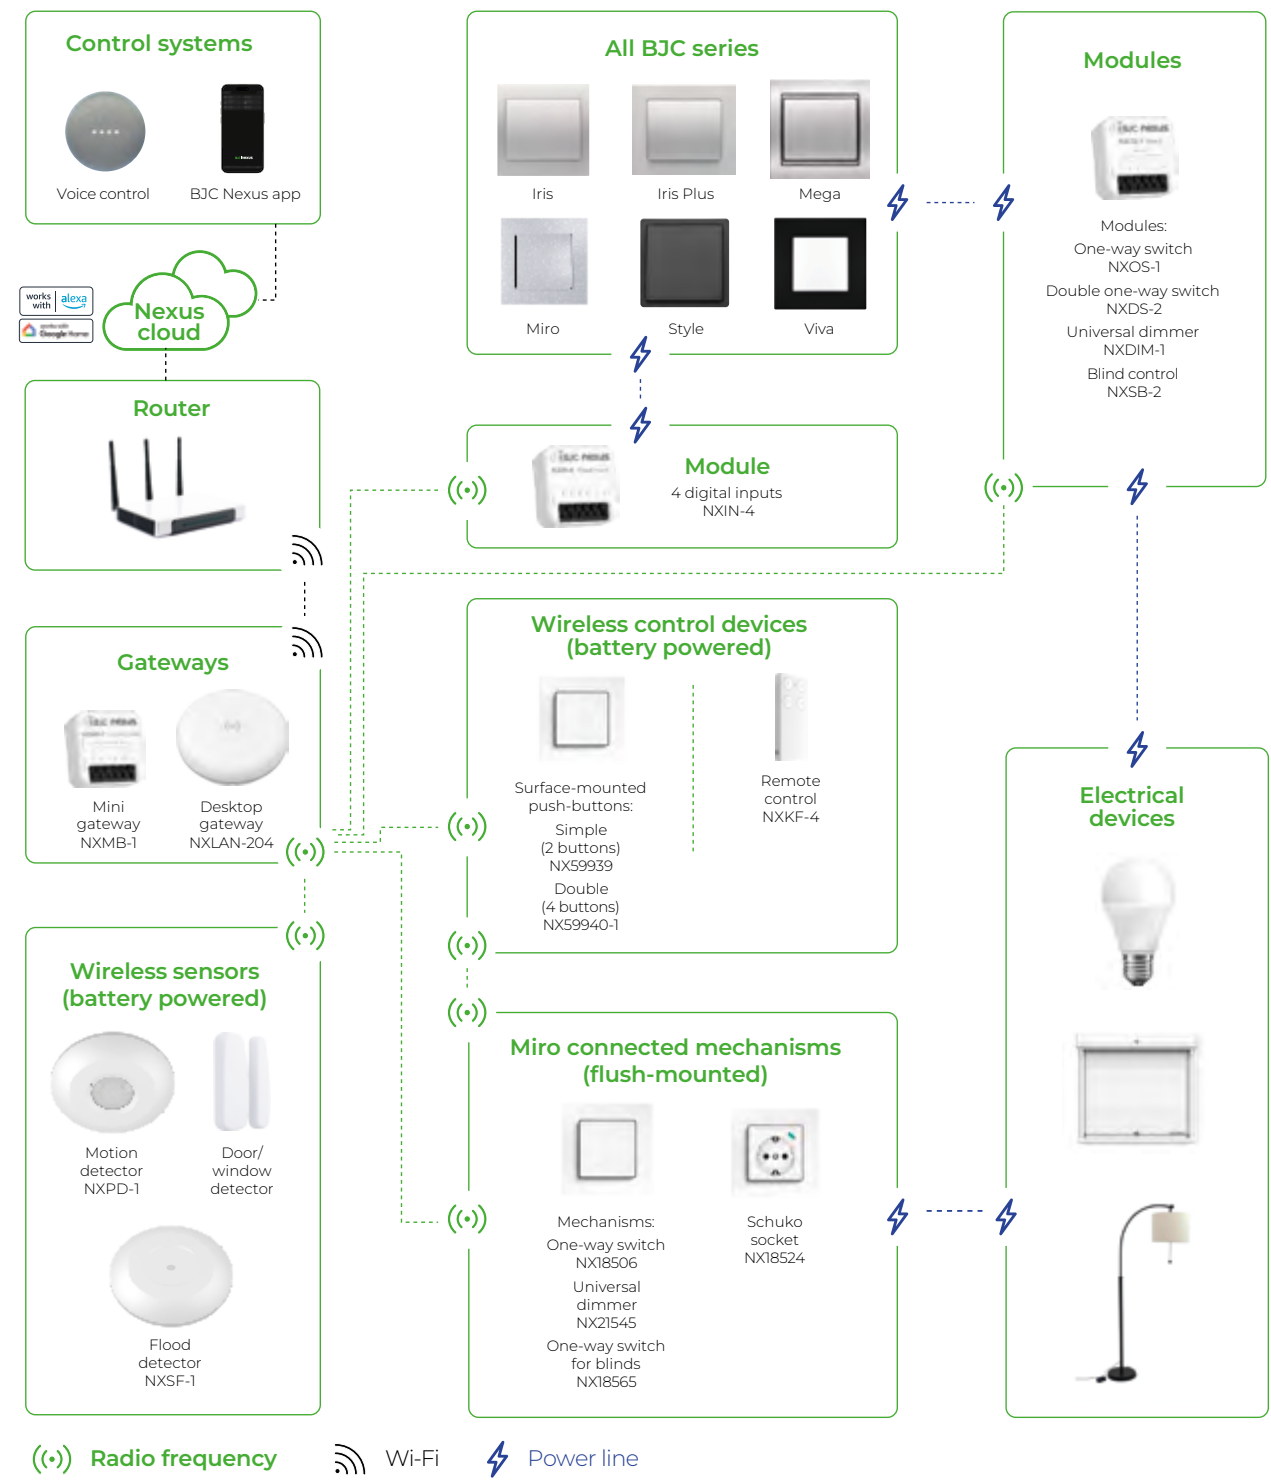

Find out more about BJC Nexus





# BJC NEXUS APP

- 
**Synchronisation**  
 Monitor and control your devices directly with the app, via time programming or scenarios.
- 
**Notifications**  
 Thanks to the notifications, you'll know exactly what's going on in your home and the status of your appliances. Wireless devices also inform you of their battery status.
- 
**Classification**  
 It organises the elements exactly how you need them, giving you control and a customised overview.


# CLOUD-BASED FEATURES

- 
**Intuitive control panel**  
 Web application, suitable for control and monitoring on a PC or large screen.
- 
**Graphs**  
 Simple graphs showing consumption or device performance over time.
- 
**Multi-level logic**  
 Additional logic with conditioning for all devices and combinations of controllers and detectors.



# COMPATIBILITY WITH ALL BJC SERIES

Combine the modules with any model in the BJC series to get your home connected.

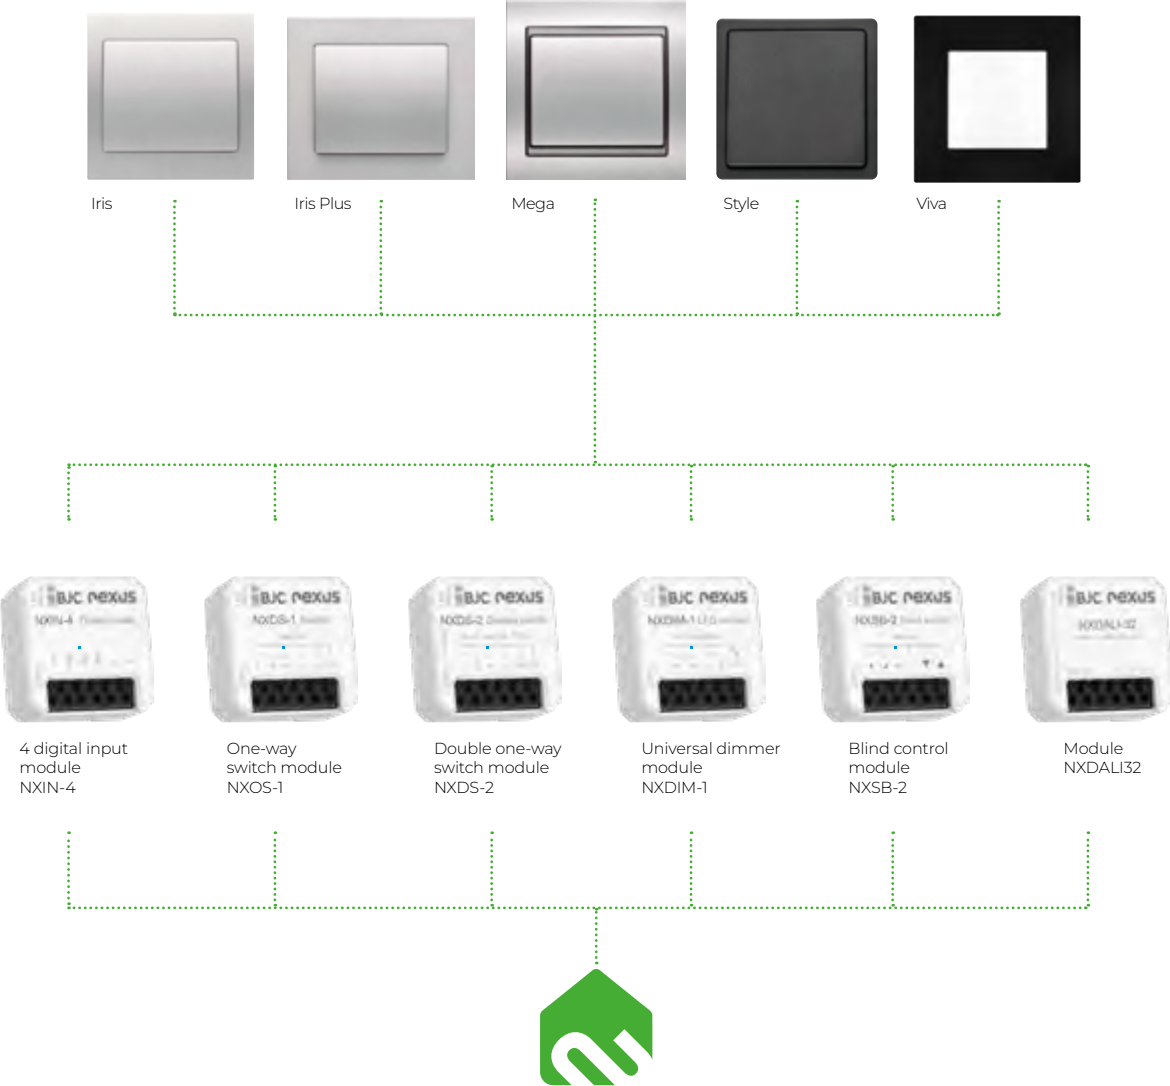


# APPLICATION AND DEVICE CONTROL

The BJC Nexus system provides full, easy control of your home from your mobile device using the dedicated app, as well as through compatible voice assistants such as Alexa or Google Home. This offers users maximum comfort and flexibility, with the ability to manage lights, blinds, sockets and scenes from anywhere, even when they are not at home.

*With Nexus I can control my home and it's simple for my regular installer to quickly and reliably expand my system.*

Download the BJC Nexus app

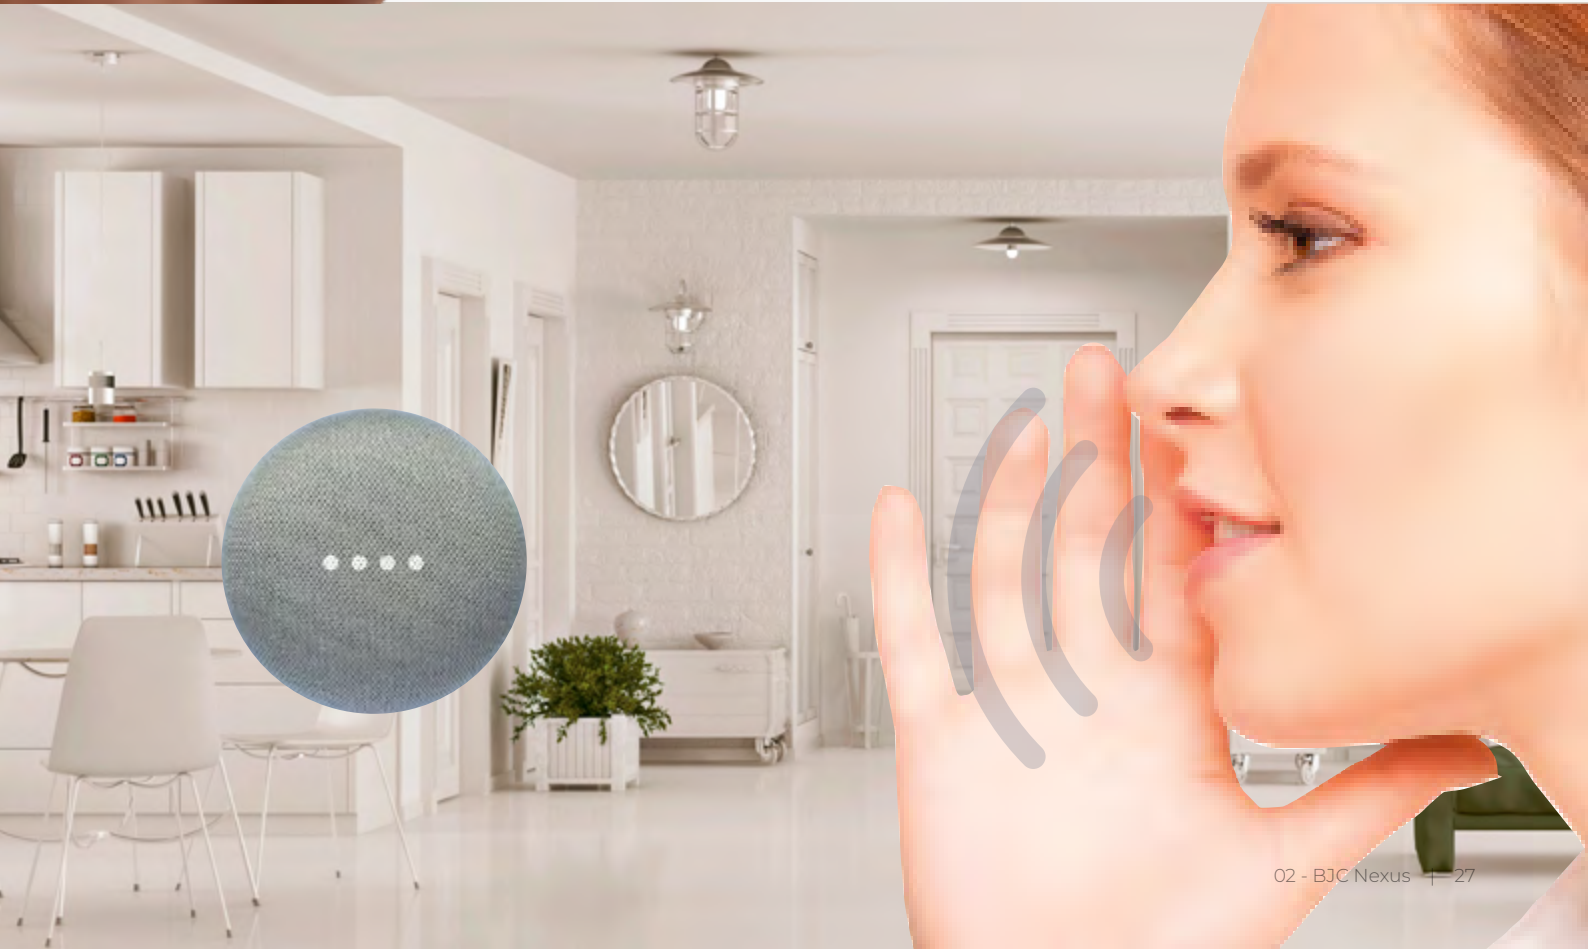

Connected Miro (with frame and switch)

Smart Home



**Connected one-way switch** **NX59906**

230 VAC 50 Hz, 10 A  
Screwed terminals  
160 m range (in open space).  
It can also be controlled manually with an external push-button.  
Includes connected mechanism, switch and single frame in Polar White

Pack of 1

SWITCH

|                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| METALLIC ALUMINIUM<br><b>SM59705-AM</b>                                            | CARBON METALLIC<br><b>SM59705-CM</b>                                                | MATT WHITE<br><b>SM59705-BM</b>                                                     | MATT BLACK<br><b>SM59705-NM</b>                                                     |

Pack of 1 1 1 1

Switch with embellisher

|                    |                    |                    |                    |
|--------------------|--------------------|--------------------|--------------------|
| <b>SM59705-AMC</b> | <b>SM59705-CMC</b> | <b>SM59705-BMC</b> | <b>SM59705-NMC</b> |
|--------------------|--------------------|--------------------|--------------------|

Pack of 1 1 1 1



**Connected universal dimmer** **NX59949**

230 VAC 50 Hz  
Compatible with incandescent lamps (14-200 W AC), 230 V halogen lamps (14-150 W AC), 12 V halogen magnetic transformer (14-150 VA), 12 V halogen electronic transformer (14-150 VA), LED trailing edge RC (7-100 VA at 230 V AC), LED leading edge RL (7-20 VA at 230 V AC).  
Screwed terminals.  
Range: 160 m (in open space).  
It can also be controlled manually with an external push-button.  
Includes connected mechanism, switch and single frame in Polar White.

Pack of 1

SWITCH

|                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| METALLIC ALUMINIUM<br><b>SM59705-AM</b>                                            | CARBON METALLIC<br><b>SM59705-CM</b>                                                | MATT WHITE<br><b>SM59705-BM</b>                                                     | MATT BLACK<br><b>SM59705-NM</b>                                                     |

Pack of 1 1 1 1

Switch with embellisher

|                    |                    |                    |                    |
|--------------------|--------------------|--------------------|--------------------|
| <b>SM59705-AMC</b> | <b>SM59705-CMC</b> | <b>SM59705-BMC</b> | <b>SM59705-NMC</b> |
|--------------------|--------------------|--------------------|--------------------|

Pack of 1 1 1 1



**Connected one-way switch for blinds** **NX59965**

230 VAC 50 Hz, 4 A  $\cos \varnothing = 0.6$   
Screwed terminals  
Range: 160 m (in open space).  
Includes connected mechanism, switch and single frame in Polar White.

Pack of 1

SWITCH

|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| METALLIC ALUMINIUM<br><b>SM59765-AM</b>                                              | CARBON METALLIC<br><b>SM59765-CM</b>                                                  | MATT WHITE<br><b>SM59765-BM</b>                                                       | MATT BLACK<br><b>SM59765-NM</b>                                                       |

Pack of 1 1 1 1

Switch with embellisher

|                    |                    |                    |                    |
|--------------------|--------------------|--------------------|--------------------|
| <b>SM59765-AMC</b> | <b>SM59765-CMC</b> | <b>SM59765-BMC</b> | <b>SM59765-NMC</b> |
|--------------------|--------------------|--------------------|--------------------|

Pack of 1 1 1 1



**Connected power socket with consumption measurement** **NX59924**

230 VAC, 50 Hz, 16 A  
Screwed terminals  
Range: 160 m (in open space).  
Can be switched on/off manually with a control button.  
Includes connected mechanism, cover and single frame in Polar White.

Pack of 1

SOCKET COVERS

|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| METALLIC ALUMINIUM<br><b>SM59724-AM</b>                                              | CARBON METALLIC<br><b>SM59724-CM</b>                                                  | MATT WHITE<br><b>SM59724-BM</b>                                                       | MATT BLACK<br><b>SM59724-NM</b>                                                       |

Pack of 1 1 1 1

Smart flush-mounted mechanisms

Smart Home



**Connected one-way switch** **NX18506**

230 VAC 50 Hz, 10 A  
Screwed terminals  
Range: 160 m (in open space).  
It can also be controlled manually with an external push-button.  
Compatible with BJC Miro frames

Pack of 1

SWITCH

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE<br><b>SM59705</b>                                                       | METALLIC ALUMINIUM<br><b>SM59705-AM</b>                                             | CARBON METALLIC<br><b>SM59705-CM</b>                                                | MATT WHITE<br><b>SM59705-BM</b>                                                     | MATT BLACK<br><b>SM59705-NM</b>                                                     |

Pack of 1 1 1 1 1

Switch with embellisher

|                  |                    |                    |                    |                    |
|------------------|--------------------|--------------------|--------------------|--------------------|
| <b>SM59705-C</b> | <b>SM59705-AMC</b> | <b>SM59705-CMC</b> | <b>SM59705-BMC</b> | <b>SM59705-NMC</b> |
|------------------|--------------------|--------------------|--------------------|--------------------|

Pack of 1 1 1 1 1



**Connected universal dimmer** **NX21545**

230 VAC 50 Hz  
Compatible with incandescent lamps (14-200 W AC), 230 V halogen lamps (14-150 W AC), 12 V halogen magnetic transformer (14-150 VA), 12 V halogen electronic transformer (14-150 VA), LED trailing edge RC (7-100 VA at 230 V AC), LED leading edge RL (7-20 VA at 230 V AC).  
Screwed terminals.  
Range: 160 m (in open space).  
It can also be controlled manually with an external push-button.  
Compatible with BJC Miro frames

Pack of 1

SWITCH

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE<br><b>SM59705</b>                                                       | METALLIC ALUMINIUM<br><b>SM59705-AM</b>                                             | CARBON METALLIC<br><b>SM59705-CM</b>                                                | MATT WHITE<br><b>SM59705-BM</b>                                                     | MATT BLACK<br><b>SM59705-NM</b>                                                     |

Pack of 1 1 1 1 1

Switch with embellisher

|                  |                    |                    |                    |                    |
|------------------|--------------------|--------------------|--------------------|--------------------|
| <b>SM59705-C</b> | <b>SM59705-AMC</b> | <b>SM59705-CMC</b> | <b>SM59705-BMC</b> | <b>SM59705-NMC</b> |
|------------------|--------------------|--------------------|--------------------|--------------------|

Pack of 1 1 1 1 1



**Connected one-way switch for blinds** **NX18565**

230 VAC 50 Hz, 4 A  $\cos \varnothing = 0.6$   
Screwed terminals  
Range: 160 m (in open space).  
Compatible with BJC Miro frames.

Pack of 1

SWITCH

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE<br><b>SM59765</b>                                                         | METALLIC ALUMINIUM<br><b>SM59765-AM</b>                                               | CARBON METALLIC<br><b>SM59765-CM</b>                                                  | MATT WHITE<br><b>SM59765-BM</b>                                                       | MATT BLACK<br><b>SM59765-NM</b>                                                       |

Pack of 1 1 1 1 1

Switch with embellisher

|                  |                    |                    |                    |                    |
|------------------|--------------------|--------------------|--------------------|--------------------|
| <b>SM59765-C</b> | <b>SM59765-AMC</b> | <b>SM59765-CMC</b> | <b>SM59765-BMC</b> | <b>SM59765-NMC</b> |
|------------------|--------------------|--------------------|--------------------|--------------------|

Pack of 1 1 1 1 1



**Connected power socket with consumption measurement** **NX18524**

230 VAC, 50 Hz, 16 A.  
Screwed terminals.  
Range: 160 m (in open space).  
Can be switched on/off manually with a control button.  
Compatible with BJC Miro frames.

Pack of 1

SOCKET COVERS

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE<br><b>SM59724</b>                                                         | METALLIC ALUMINIUM<br><b>SM59724-AM</b>                                               | CARBON METALLIC<br><b>SM59724-CM</b>                                                  | MATT WHITE<br><b>SM59724-BM</b>                                                       | MATT BLACK<br><b>SM59724-NM</b>                                                       |

Pack of 1 1 1 1 1



Surface-mounted connected Miro



**Surface-mounted connected push-button** **NX59939**  
Powered by a 3 V battery, CR2032 (supplied).  
Secured by adhesive or screws in flush-mounting box.  
Range: 200 m (in open space)  
Includes connected mechanism, fixing base, frame and switch in Polar White.

Pack of 1

Pack of

| SURFACE-MOUNTED SMART SWITCH |                    |                   |                   |                   |
|------------------------------|--------------------|-------------------|-------------------|-------------------|
|                              |                    |                   |                   |                   |
| POLAR WHITE                  | METALLIC ALUMINIUM | CARBON METALLIC   | MATT WHITE        | MATT BLACK        |
| <b>SM59739</b>               | <b>SM59739-AM</b>  | <b>SM59739-CM</b> | <b>SM59739-BM</b> | <b>SM59739-NM</b> |
| 1                            | 1                  | 1                 | 1                 | 1                 |

Pad printing



| SURFACE-MOUNTED SMART SWITCH WITH "1-2" SYMBOLS |                    |                    |                    |                    |
|-------------------------------------------------|--------------------|--------------------|--------------------|--------------------|
|                                                 |                    |                    |                    |                    |
| POLAR WHITE                                     | METALLIC ALUMINIUM | CARBON METALLIC    | MATT WHITE         | MATT BLACK         |
| <b>SM59739-1</b>                                | <b>SM59739-1AM</b> | <b>SM59739-1CM</b> | <b>SM59739-1BM</b> | <b>SM59739-1NM</b> |
| 1                                               | 1                  | 1                  | 1                  | 1                  |

Pack of

Pad printing



| SURFACE-MOUNTED SMART SWITCH WITH "DAY/NIGHT" SYMBOLS |                    |                    |                    |                    |
|-------------------------------------------------------|--------------------|--------------------|--------------------|--------------------|
|                                                       |                    |                    |                    |                    |
| POLAR WHITE                                           | METALLIC ALUMINIUM | CARBON METALLIC    | MATT WHITE         | MATT BLACK         |
| <b>SM59739-2</b>                                      | <b>SM59739-2AM</b> | <b>SM59739-2CM</b> | <b>SM59739-2BM</b> | <b>SM59739-2NM</b> |
| 1                                                     | 1                  | 1                  | 1                  | 1                  |

Pack of

Pad printing



| SURFACE-MOUNTED SMART SWITCH WITH "INPUT/OUTPUT" SYMBOLS |                    |                    |                    |                    |
|----------------------------------------------------------|--------------------|--------------------|--------------------|--------------------|
|                                                          |                    |                    |                    |                    |
| POLAR WHITE                                              | METALLIC ALUMINIUM | CARBON METALLIC    | MATT WHITE         | MATT BLACK         |
| <b>SM59739-3</b>                                         | <b>SM59739-3AM</b> | <b>SM59739-3CM</b> | <b>SM59739-3BM</b> | <b>SM59739-3NM</b> |
| 1                                                        | 1                  | 1                  | 1                  | 1                  |

Pack of



**Surface-mounted connected double push-button** **NX59940**  
Powered by a 3 V battery, CR2032 (supplied).  
Secured by adhesive or screws in flush-mounting box.  
200 m range (in open space).  
Includes connected mechanism, fixing base, frame and switches in Polar White.

Pack of 1

Pack of

| SURFACE-MOUNTED DOUBLE SMART SWITCH |                    |                   |                   |                   |
|-------------------------------------|--------------------|-------------------|-------------------|-------------------|
|                                     |                    |                   |                   |                   |
| POLAR WHITE                         | METALLIC ALUMINIUM | CARBON METALLIC   | MATT WHITE        | MATT BLACK        |
| <b>SM59740</b>                      | <b>SM59740-AM</b>  | <b>SM59740-CM</b> | <b>SM59740-BM</b> | <b>SM59740-NM</b> |
| 1                                   | 1                  | 1                 | 1                 | 1                 |

Pad printing



| SURFACE-MOUNTED SMART DOUBLE SWITCH WITH "1-2-3-4" SYMBOLS |                    |                    |                    |                    |
|------------------------------------------------------------|--------------------|--------------------|--------------------|--------------------|
|                                                            |                    |                    |                    |                    |
| POLAR WHITE                                                | METALLIC ALUMINIUM | CARBON METALLIC    | MATT WHITE         | MATT BLACK         |
| <b>SM59740-1</b>                                           | <b>SM59740-1AM</b> | <b>SM59740-1CM</b> | <b>SM59740-1BM</b> | <b>SM59740-1NM</b> |
| 1                                                          | 1                  | 1                  | 1                  | 1                  |

Pack of

Actuator modules



**One-way switch module** **NXOS-1**  
230 VAC 50 Hz, total load 8 A (2000 W)  
1 output  
Screwless terminal.  
200 m range (in open space).  
It can be controlled manually with an external push-button.

Pack of 1



**Double one-way switch module** **NXDS-2**  
230 VAC 50 Hz, total load 8 A (2000 W)  
2 outputs  
Screwless terminal.  
200 m range (in open space).  
Each output can be controlled manually with 1 separate external push-button for each of them.

Pack of 1



**Blind module** **NXSB-2**  
230 VAC 50 Hz, total load 2x8 A (2x2000 W)  
2 outputs  
Screwless terminal.  
Range up to 200 m (in open space).  
Each output can be controlled manually with 1 separate external push-button for each of them.

Pack of 1



**DALI-2 controller module** **NXDALI-32**  
100-230 VAC 50 Hz.  
DALI power supply output 16 V/100 mA. Can control up to 32 devices.  
Screwless terminal.  
Range up to 200 m (in open space).  
It can be controlled manually with an external push-button.

Pack of 1



**Universal dimmer module** **NXDIM-1**  
230 VAC 50 Hz  
Compatible with R, L, C, LED and ESL loads  
Maximum load 300 W  
Screwless terminal.  
200 m range (in open space).  
It can be controlled manually with an external push-button.

Pack of 1



**4-input module** **NXIN-4**  
230 VAC, 50 Hz.  
Screwless terminal.  
Range up to 200 m (in open space).  
Each of the four inputs allows the signal from a conventional push-button or switch to be sent to a BJC Nexus device.

Pack of 1

Gateways



**Mini Wi-Fi gateway** **NXMB-1**  
230 VAC 50 Hz, total load 10 A.  
2 outputs  
Screwless terminal.  
200 m range (in open space).  
Up to 70 BJC Nexus devices can be connected.  
Each output can be controlled manually with 1 separate external push-button for each of them.

Pack of 1



**Desktop gateway** **NXLAN-204**  
Power supply via 230 V/5 V power adapter (supplied).  
200 m range (in open spaces).  
Allows you to connect up to 70 BJC Nexus devices.

Pack of 1

Wireless sensors (battery powered)



**Motion detector** **NXPD-1**  
Powered by 2 x 1.5 V AA batteries (supplied).  
105° detection angle.  
Maximum sensing distance 12 m.  
Recommended working height: 2.4 m.  
Colour: White

Pack of 1



**Door and window sensor contact** **NXWDC-1**  
Powered by 1 x 3 V CR2032 battery (supplied).  
Colour: White.

Pack of 1



**Flood detector** **NXSF-1**  
Powered by 2 x 1.5 V AAA batteries (supplied).  
160 m range (in open spaces).  
Colour: White.

Pack of 1



**Remote control** **NXKF-4**  
Powered by 1 x 3 V CR2032 battery (supplied)  
Each of the four buttons allows a signal to be sent to a BJC Nexus device.  
200 m range (in open spaces).  
Colour: White.

Pack of 1





# BJC

## Iris Iris Plus Mega

### Which design do you prefer?

With the Iris, Iris Plus and Mega series, you can choose the most appealing combination. Three different series for you to express your own style.



**Iris**

#### Curves that transform

The smooth and fluid curves of the Iris series complement any style of decoration.



**Iris Plus**

#### Balance that inspires

A new straight-line frame that combines perfectly with the curved shape of the Iris switch.



**Mega**

#### You know what you want

The smooth, well-balanced curves of its metallic frames and the wide range of finishes are designed to meet the needs of the most demanding customers.



# MEC 18

One single mechanism is suitable for all five luxury BJC series: Iris, Iris Plus, Mega, Style and Miro.


Its structure is ergonomically designed for easy, quick and hassle-free installation. Its compact mechanism makes use of all the space inside the flush-mounting box and facilitates cable routing. It is designed to ensure flawless installation.

- Our one-way and two-way 16A MEC18 switches allow many different applications with the same mechanism, reducing the number of items and references you need to stock.
- The galvanised steel fixing frames are treated to prevent corrosion, ensuring durable installation components.
- The fixing frames feature upper and lower profiles that facilitate assembly and ensure the mechanism is rigidly positioned.

The socket outlets feature safety protection and use standard STAI connectors - an open safety screw system. Just connect and tighten. The screws close with a single operation. Their engraved floating nut prevents the cable from slipping and guarantees a perfect fastening across the whole of the contact surface. The three conductors enter through the top of the socket outlet. They are also screwed onto one side of the socket outlet. Outlets and covers are supplied together but are not pre-assembled, which allows for quick and safe terminal connection and fastening.




Certifications



MEC 18

## The same mechanism for 5 different designs

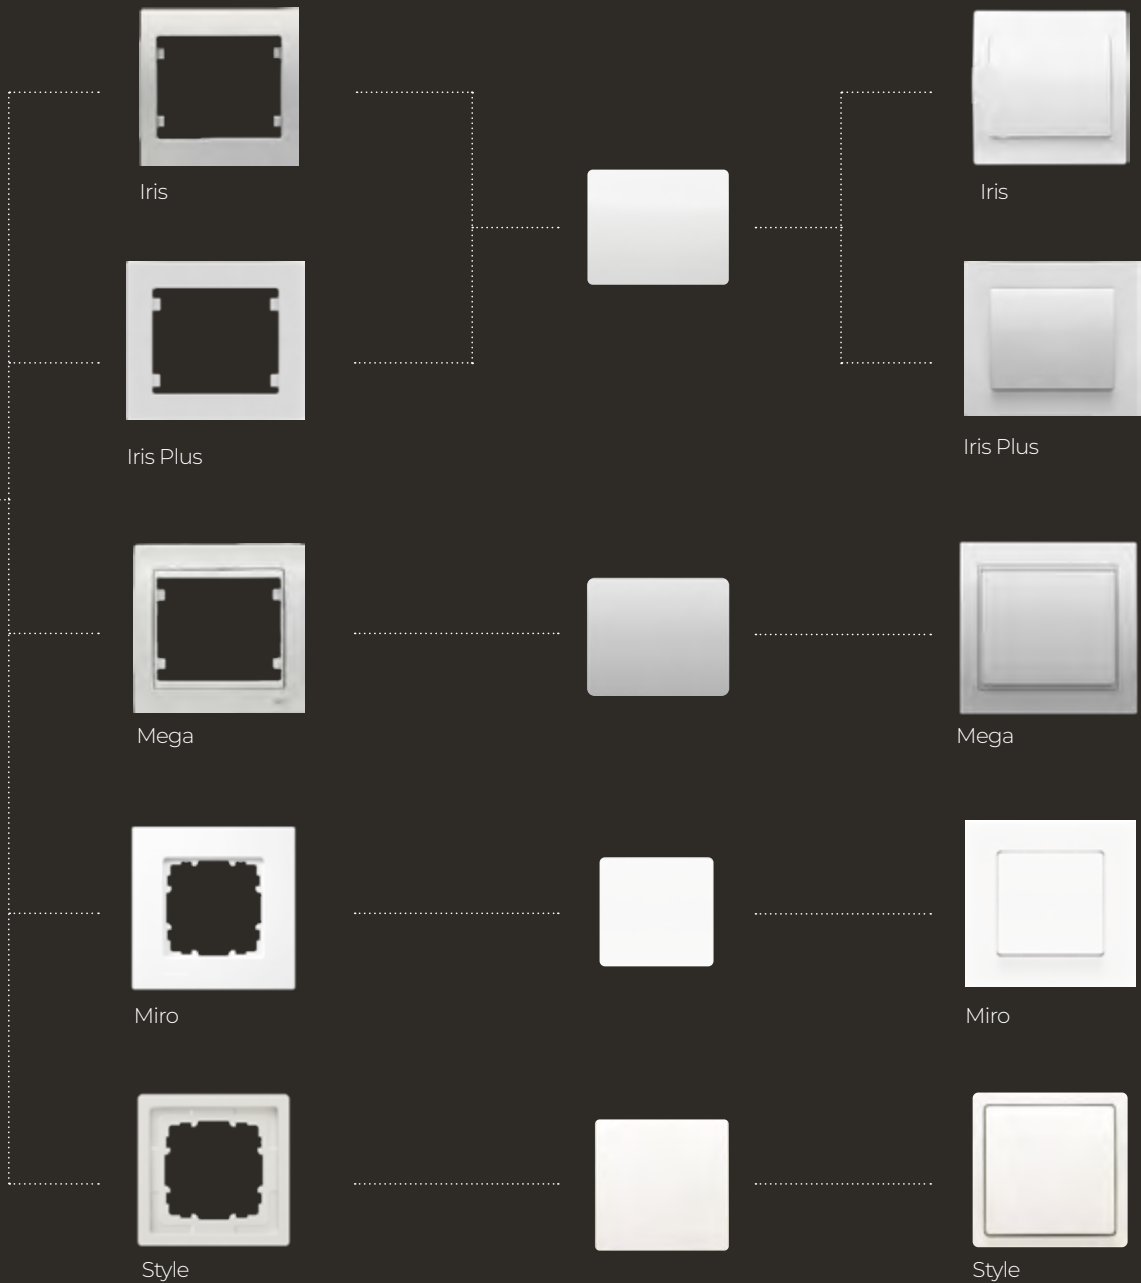



# Choose your favourite colour

## Iris

Which colour defines you? We invite you to discover and express your own style with Iris. This designer series comes in a wide range of colours, so you can choose the one that best suits your personality.



White



Beige



Odyssey Gold



Chocolate



Neptune Steel



Mercury Aluminium

# Everyone has a different Iris colour. Now with Iris Plus

## Iris Plus

We all see and interpret spaces differently. That's why we're introducing the new Iris Plus. This new option features a straight-line frame and now joins the hundreds of possibilities already offered by the standard Iris series.



White



Mercury Aluminium



Chocolate



Cosso Anthracite

# Because you know what you want

## Mega

Gold, aluminium and pearl. Metal brings elegance and singularity, creating a chromatic harmony that blends perfectly into all sorts of different spaces. The series' "Cosso" finish on the switches provides excellent results and an endless number of combinations. All the metal frames of the Mega series with a Zamak finish are pressure die-cast. The colour finishes of the Mega series are treated with the same processes as those used in the automotive industry.

### Soft Metal



Fusion Aluminium



Prussian Aluminium



Misty Bronze



Mabe Pearl White



Malt Gold

### Textured Metal



Ebony Black



Mocha Brown



Aluminium



Gold

### Pure Metal

### Solid Metal



Samoa Brown



Satin White

BJC

# Iris

## Which colour defines you?

We invite you to discover and express your own style with Iris. This designer series comes in a wide range of colours, so you can choose the one that best suits your personality.



“ The smooth and fluid curves of the Iris series complement any style of decoration.



## Curves that transform

Its structure is ergonomically designed for easy, quick and hassle-free installation. Its compact mechanism makes use of all the space inside the flush-mounting box and facilitates cable routing.

(↔) Smooth curves

Front view with square lines

Can be wall mounted

Compatible with BJC Nexus Smart Home

It adapts to any decoration needs

Many different finishes

IP44 Solutions

“ Its balanced and soft design reflects your personality and complements your home décor perfectly.  
The choice is yours.



# Iris Plus


## Style and elegance

We all see and interpret spaces differently. That's why we're introducing the new Iris Plus. This new option features a straight-line frame and now joins the hundreds of possibilities already offered by the standard IRIS series.

“

A very popular concept in the residential and tertiary sectors.

BJC



## Simple and clean design

A combination of shapes that deliver an eclectic design. A new linear frame that perfectly combines the curved shape of the switch and the pleasant feel of the mechanism in the Iris range.

 Made from an urea-based resin: the unalterable white

 Flat surface

 Straight lines

 Compatible with  
BJC Nexus  
Smart Home

 No steps, angles  
or intermediate  
frames

 Simple and clean  
design

 Front view with  
square lines

 IP44  
Solutions

“

Architects find its square style highly attractive. Perfect for remodelling and refurbishment work; you only need to change the frame.



BJC

# Mega

You know what you want

There comes a time in life when you don't need any more advice, because you know what you want. You have listened to others and compared many different opinions, but you know what you need best.




“ Mega's many different finishes mean it can be tailored to any decoration needs.



## Design, elegance and technology

Its design reflects your personality and complements your home décor perfectly.

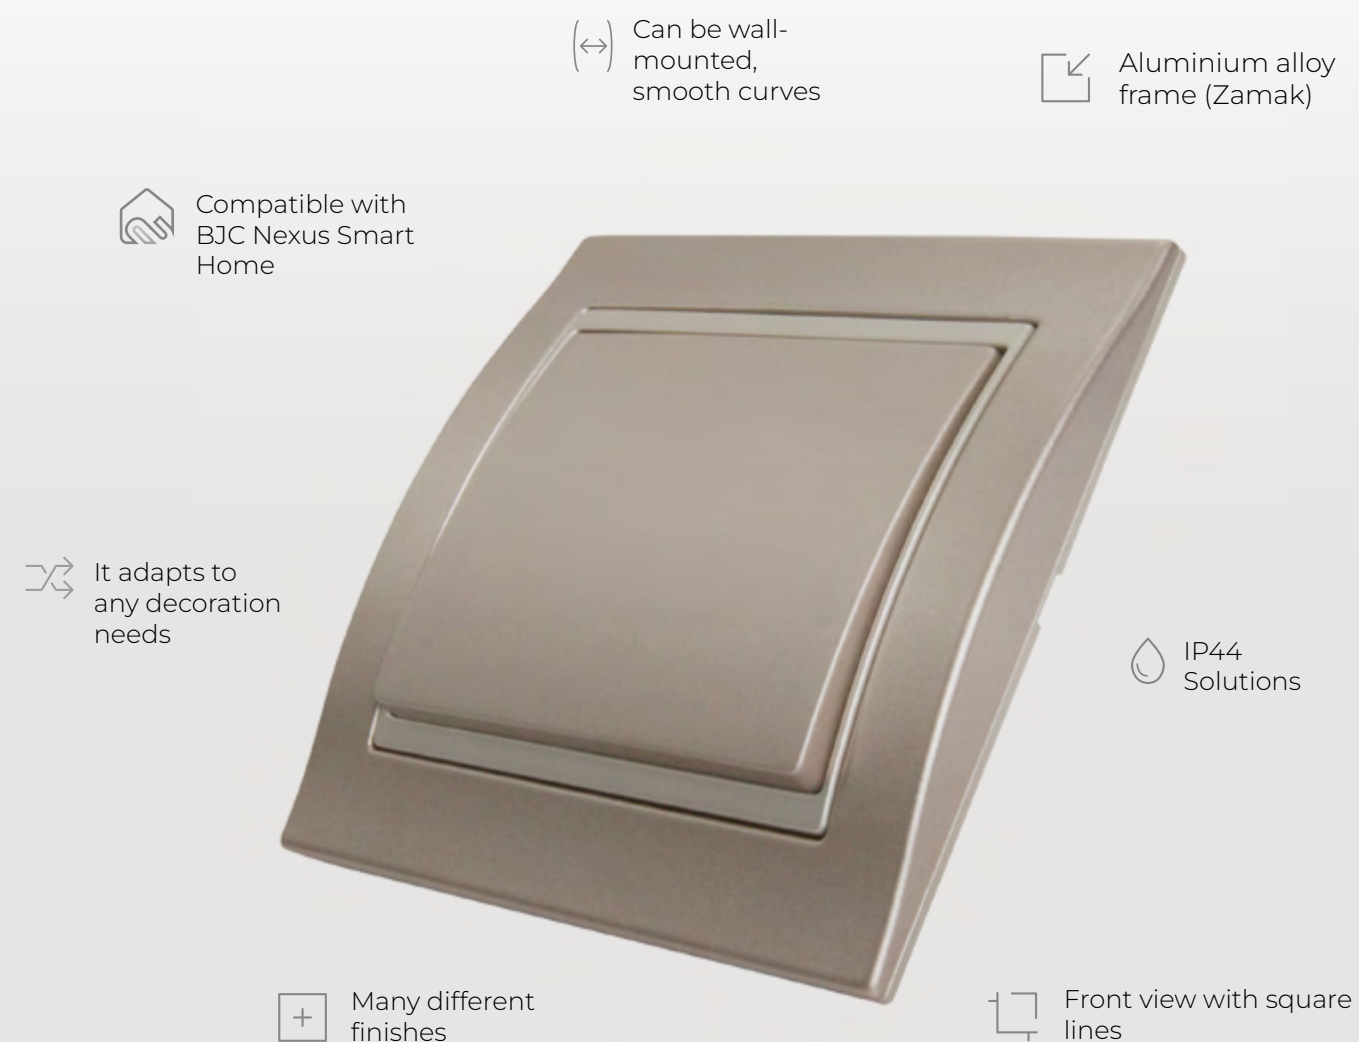

“ The colour finishes of the Mega series are treated with the same processes as those used in the automotive industry.



# Urea: the unalterable white

The Iris and Iris plus series are made from Urea, a thermo-setting and self-extinguishing resin. Its thermosetting properties provide exceptional surface hardness, resistance to heat and fading from UV rays and chemical agents. It is also an excellent electrical insulator.




# Antibacterial finish

Thanks to their antibacterial finish, Iris and Iris Plus impede the survival and transmission of microorganisms. This makes them the perfect choice for environments in which microorganisms thrive and the risk of transmission is high, such as hospitals, care homes, residential homes, care centres and communal areas in offices or homeowners' associations.



## Scratch resistance

Mechanisms made from Urea are extremely scratch resistant. This is due to the fact that Urea has a much greater surface hardness than other materials.




## Resistance to sun rays

As they are made from Urea, the Iris and Iris Plus series are highly resistant to UV light. This ensures that the colour will not change over time, unlike other white finishes used in the home deteriorate and discolour notably over the years.



## Resistance to cleaning chemicals and disinfection

One-way switch mechanisms are exposed daily to a multitude of germs and viruses as well as disinfectants, solvents and cleaning products. Unlike other thermoplastics, one of Urea's key properties is precisely its resistance to degradation due to the continued use of chemicals to disinfect germs and viruses such as COVID-19.



## Resistance to high temperatures

Urea is a fire-retardant resin. Once moulded, it hardens and remains rigid when exposed to heat, rather than softening or melting. Its excellent chemical stability, high resistance to deformation, low thermal linear expansion and low flammability make it an exceptionally safe material. Products made from Urea not only comply with the relevant tests of the IEC 60884-1 and IEC 60669-1 standards at 650°C, but also pass the tests carried out at 850°C (V0 rating according to UL94).



## Eco-friendly mechanisms

As BJC's products do not contain any dangerous substances, they are eco-friendly. Urea's long useful life avoids the need to change or replace parts, which helps to reduce consumption and improve the environment by avoiding waste.



# IP44 protection

Our standard series are now also available for outdoor use.


- In all colours and frames.
- Schuko® socket outlet, single and double mechanism, TV and RJ.
- Same mechanism and frame as the IP20.



IP44  
⚡




Iris white  
IP44 RJ (cover open) + IP44 double push-button

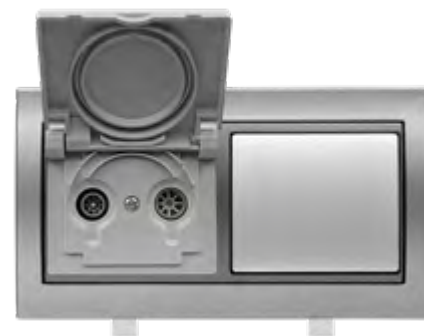

Mega fusion aluminium  
IP44 TV (cover open) + IP44 push-button

RJ Iris IP44 assembly example

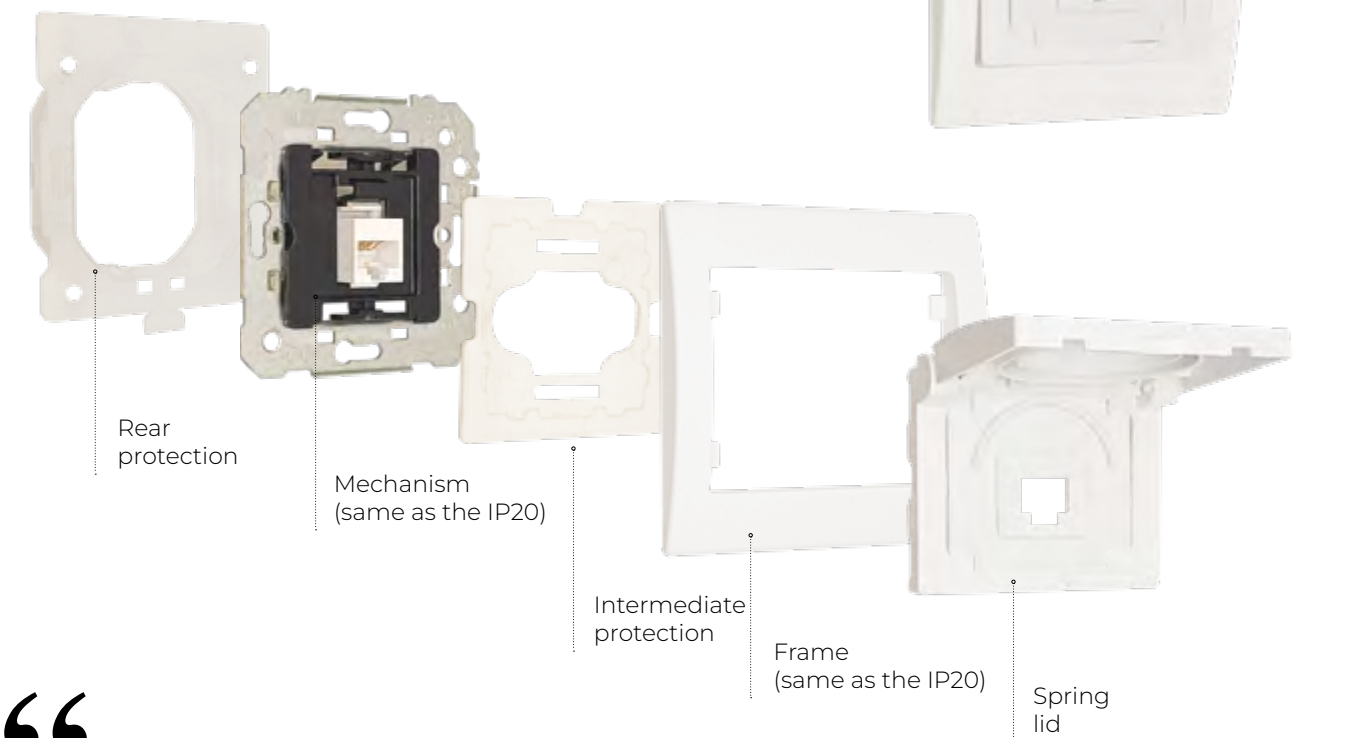

“

Transform what you already have:  
IP44 is compatible with standard  
mechanisms and frames.





# Many different functions

The Iris, Iris Plus and Mega series offer a wide range of features to meet today's needs. These include light intensity dimmers, sound controllers, and mechanisms for raising and lowering blinds. Choose whichever options you need for your total comfort and enjoy their appealing, colourful designs. All functions are included in all three series.



### Motion detector

The BJC motion detector is an automatic system for switching lights on and off that does not require direct activation. With its 180° detection angle, it's always ready to detect movement. This practical and convenient safety solution also cuts costs. Its detection capacity reduces unnecessary lighting costs in transit areas and prevents lights being left on by mistake or due to the presence of children.



### Dual USB chargers

The Schuko® socket outlet with dual USB Type A and Type C allows you to charge two terminals simultaneously while leaving the actual socket free for use. Quick and easy installation in a standard flush-mounting box.

- Power Delivery (required by the EU from 2024)
- Quick charge
- For standard flush-mounting boxes



### Multimedia

Multimedia connectors are the perfect solution to prevent exposed wiring during installation and for the distribution of electronic devices in any type of installation; whether residential or commercial. The HDMI, RJ45, stereo cable and other outputs can provide separate input and output sources, for efficient connections and uncluttered installations.



### Socket outlet with voltage indicator

The socket outlet with voltage indicator features a pilot light to indicate that the socket outlet is powered, that voltage is present and that it is operating. The pilot light turns off in the event of an outage. This is very useful for checking that the device is still connected and being powered. It is particularly suitable for devices where an outage could disrupt critical or sensitive processes, making it ideal for settings such as hospitals, chemical plants and the food industry.



### RJ and fibre-optic sockets

The new solutions developed by BJC allow you to connect an SW/APC optical fibre adapter, ensuring compliance with the latest regulations. This allows the fibre-optic cable to reach the required location and enables the router to be easily connected.



### Thermostats

Our thermostats can be used to control and adjust the temperature in each room. Their simple settings allow you to achieve the right level of climate comfort while being energy efficient.



### LED beacon light and removable emergency beacon light

This practical and functional removable emergency beacon light provides you with a handheld lamp so you can move around the house when the electrical circuits have been accidentally disconnected due to an outage or breakdown. It lights up like an emergency lamp, making it easy to find in the dark. As it is removable, you can carry it with you as you set off in search of an alternative light source or the distribution board.



### Key card switches

Hotel key card switches offer practical and cost-effective solutions. When the key card is inserted, the electrical circuits of the lighting and air conditioning systems are switched on automatically. When the key card is removed, all connected electrical circuits are switched off automatically. We offer both conventional mechanical solutions and timed electronic solutions.



### Dimmers

Dimmers are the perfect way to create an atmosphere in rooms by adjusting the lighting levels to the desired intensity. The intensity can be increased or decreased. Due to the variety of lamp technologies and power levels, it is essential to use a specific dimmer designed to match each lamp. BJC offers a wide range of dimmers suitable for different lamps and power ratings.




### Push-button with indicator light

The indicator light makes it easy to find the push-button in dimly lit areas.



### Centralised blind control

Simply press a button to lower all of the blinds in a house or on a floor, either individually or centrally.

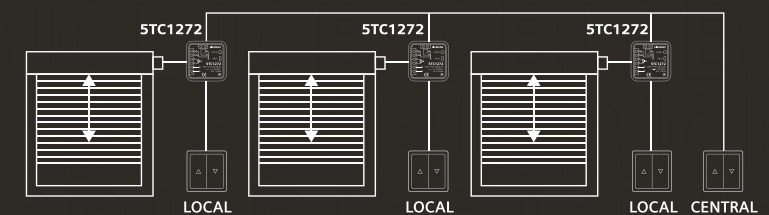



# 16 A in Mec switches

The switches feature a powerful 16 A device with an automatic terminal connection. Their ergonomic design ensures comfortable, easy and safe handling.



The Mec 18 mechanism can be adapted to Iris, Iris Plus, Mega, Style and Miro products for your comfort.

Reference table for composing basic functions

| Function                                           | Iris       |              |        | Iris Plus  |              |        | Mega       |              |        |
|----------------------------------------------------|------------|--------------|--------|------------|--------------|--------|------------|--------------|--------|
|                                                    | Mechanism  | Switch/Cover | Frame  | Mechanism  | Switch/Cover | Frame  | Mechanism  | Switch/Cover | Frame  |
| One-way switch                                     | 18505      | 18705*       | 18001* | 18505      | 18705*       | 18011* | 18505      | 22705*       | 22001* |
| Two-way switch                                     | 18506      | 18705*       | 18001* | 18506      | 18705*       | 18011* | 18506      | 22705*       | 22001* |
| Intermediate switch                                | 18507      | 18705*       | 18001* | 18507      | 18705*       | 18011* | 18507      | 22705*       | 22001* |
| Double one-way switch                              | 18509      | 18709*       | 18001* | 18509      | 18709*       | 18011* | 18509      | 22709*       | 22001* |
| Double two-way switch                              | 18510      | 18709*       | 18001* | 18510      | 18709*       | 18011* | 18510      | 22709*       | 22001* |
| Push-button, bell symbol                           | 18516      | 18716*       | 18001* | 18516      | 18716*       | 18011* | 18516      | 22716*       | 22001* |
| Push-button, bulb symbol                           | 18516      | 18717*       | 18001* | 18516      | 18717*       | 18011* | 18516      | 22717*       | 22001* |
| Rotary dimmer                                      | 21550-X    | 18749*       | 18001* | 21550-X    | 18749*       | 18011* | 21550-X    | 22749*       | 22001* |
| Schuko® socket outlet                              | 18524      | 18724*       | 18001* | 18524      | 18724*       | 18011* | 18524      | 22724*       | 22001* |
| Schuko® socket outlet + dual USB Type A and Type C | 18524-USBC | 18724-USBC*  | 18001* | 18524-USBC | 18724-USBC*  | 18011* | 18524-USBC | 22724-USBC*  | 22001* |
| TV cover                                           | ---        | 18330*       | 18001* | ---        | 18330*       | 18011* | ---        | 22330*       | 22001* |
| Single RJ socket outlet                            | 19582-1    | 19782*       | 18001* | 19582-1    | 19782*       | 18011* | 19582-1    | 22782*       | 22001* |
| Double RJ socket outlet                            | 19682-1    | 19882*       | 18001* | 19682-1    | 19882*       | 18011* | 19682-1    | 22783        | 22001* |
| Blank cover                                        | ---        | 18033*       | 18001* | ---        | 18033*       | 18011* | ---        | 22033*       | 22001* |
| Cable output                                       | 18534      | 18734*       | 18001* | 18534      | 18734*       | 18011* | 18534      | 22734*       | 22001* |
| Buzzer                                             | 18536-B    | 18730*       | 18001* | 18536-B    | 18730*       | 18011* | 18536-B    | 22730*       | 22001* |
| Key card switch                                    | ---        | 18068*       | 18001* | ---        | 18068*       | 18011* | ---        | 22068*       | 22001* |

\* For remaining colours, add the extension colour:

| Colour | Iris              |     |  | Iris Plus         |     |  | Mega               |     |  |
|--------|-------------------|-----|--|-------------------|-----|--|--------------------|-----|--|
|        | White             | -   |  | White             | -   |  | Fusion Aluminium   | -AF |  |
|        | Beige             | -A  |  | Mercury Aluminium | -MA |  | Prussian Aluminium | -AP |  |
|        | Odyssey Gold      | -OD |  | Cosso Anthracite  | -AC |  | Malt Gold          | -DM |  |
|        | Chocolate         | -CH |  | Chocolate         | -CH |  | Pearl White        | -BP |  |
|        | Mercury Aluminium | -MA |  |                   |     |  | Misty Bronze       | -BN |  |
|        | Neptune Steel     | -AN |  |                   |     |  | Samoa Brown        | -MS |  |
|        |                   |     |  |                   |     |  | Satin White        | -BS |  |
|        |                   |     |  |                   |     |  | Cosso Anthracite   | -AC |  |

The COSSO ANTHRACITE finish in the Iris Plus series is the same as in the Mega series. Coloured extensions for Mega covers and switches. For frame extensions for the Mega series, please see pages 98 to 99.

Switch mechanisms



Single pole one-way switch 18505  
Two-way switch 18506  
16 A 250 V~  
Intermediate switch 18507  
10 A 250 V~

Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*



Pack of 20 WHITE\* 18705-L BEIGE 18705-AL ODYSSEY GOLD 18705-ODL CHOCOLATE\* 18705-CHL  
Pack of 2



Pack of 20 MERC. ALUM.\* 18705-MAL NEP. STEEL 18705-ANL




Pack of 20 WHITE\* 18705 BEIGE 18705-A ODYSSEY GOLD 18705-OD CHOCOLATE\* 18705-CH  
Pack of 2



Pack of 20 MERC. ALUM.\* 18705-MA NEP. STEEL 18705-AN

Mega / Iris Plus\*



Pack of 2 FUSION ALUM. 22705-AFL PRUSS. ALUM. 22705-APL MALT GOLD 22705-DML PEARL WHITE 22705-BPL



Pack of 2 MISTY BRON. 22705-BNL SAMOA BR. 22705-MSL SATIN WHITE 22705-BSL COSSO AN.\* 22705-ACL



Pack of 2 FUSION ALUM. 22705-AF PRUSS. ALUM. 22705-AP MALT GOLD 22705-DM PEARL WHITE 22705-BP



Pack of 2 MISTY BRON. 22705-BN SAMOA BR. 22705-MS SATIN WHITE 22705-BS COSSO AN.\* 22705-AC

Switch mechanisms



Single pole one-way switch 18605  
Two-way switch with control light 18606  
Two-way switch with control light  
Two-way switch with pilot light 18506-L  
16 A 250 V~

Pack of 10

Indicator lamp incorporated in reference 18506-L

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*



Pack of 20 WHITE\* 18705-L BEIGE 18705-AL ODYSSEY GOLD 18705-ODL CHOCOLATE\* 18705-CHL  
Pack of 2



Pack of 20 MERC. ALUM.\* 18705-MAL NEP. STEEL 18705-ANL

Mega / Iris Plus\*



Pack of 2 FUSION ALUM. 22705-AFL PRUSS. ALUM. 22705-APL MALT GOLD 22705-DML PEARL WHITE 22705-BPL



Pack of 2 MISTY BRON. 22705-BNL SAMOA BR. 22705-MSL SATIN WHITE 22705-BSL COSSO AN.\* 22705-ACL





Switch mechanisms





**2 pole one-way switch** **18508**  
**2 pole one-way switch** **18608**  
**with control light**  
16 A 250 V~  
  
Pack of 10  
  
Indicator lamp incorporated in reference  
18608

\*The colours of the Iris Plus frames match those marked with an asterisk


Iris / Iris Plus\*

|                                                                                    |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| Pack of 20<br>WHITE*<br><b>18708-L</b>                                             | ODYSSEY GOLD<br><b>18708-ODL</b>                                                    | CHOCOLATE*<br><b>18708-CHL</b><br>Pack of 2                                         |
|  |  |                                                                                     |
| Pack of 20<br>MERC. ALUM.*<br><b>18708-MAL</b>                                     | NEP. STEEL<br><b>18708-ANL</b>                                                      |                                                                                     |

|                                                                                    |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| Pack of 20<br>WHITE*<br><b>18708</b>                                               | ODYSSEY GOLD<br><b>18708-OD</b>                                                     | CHOCOLATE*<br><b>18708-CH</b><br>Pack of 2                                          |
|  |  |                                                                                     |
| Pack of 20<br>MERC. ALUM.*<br><b>18708-MA</b>                                      | NEP. STEEL<br><b>18708-AN</b>                                                       |                                                                                     |

Mega / Iris Plus\*

|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 2<br>FUSION ALUM.<br><b>22708-AFL</b>                                        | PRUSS. ALUM.<br><b>22708-APL</b>                                                      | MALT GOLD<br><b>22708-DML</b>                                                         | PEARL WHITE<br><b>22708-BPL</b>                                                       |
|  |  |  |  |
| Pack of 2<br>MISTY BRON.<br><b>22708-BNL</b>                                         | SAMOA BR.<br><b>22708-MSL</b>                                                         | SATIN WHITE<br><b>22708-BSL</b>                                                       | COSSO AN.*<br><b>22708-ACL</b>                                                        |

|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 2<br>FUSION ALUM.<br><b>22708-AF</b>                                         | PRUSS. ALUM.<br><b>22708-AP</b>                                                       | MALT GOLD<br><b>22708-DM</b>                                                          | PEARL WHITE<br><b>22708-BP</b>                                                        |
|  |  |  |  |
| Pack of 2<br>MISTY BRON.<br><b>22708-BN</b>                                          | SAMOA BR.<br><b>22708-MS</b>                                                          | SATIN WHITE<br><b>22708-BS</b>                                                        | COSSO AN.*<br><b>22708-AC</b>                                                         |

Switch mechanisms



**Double one-way switch** **18509**  
**Double two-way switch** **18510**  
16 A 250 V~  
**Double push-button** **18511**  
10 A 250 V~  
**Double push-button with lamp** **18511-L**  
**Double normally-closed push-button** **18513**  
10 A 250 V~  
  
Pack of 10  
  
Indicator lamp incorporated in reference  
18511-L


\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 20<br>WHITE*<br><b>18709-L</b>                                              | BEIGE<br><b>18709-AL</b>                                                            | ODYSSEY GOLD<br><b>18709-ODL</b>                                                    | CHOCOLATE*<br><b>18709-CHL</b><br>Pack of 2                                         |
|  |  |                                                                                     |                                                                                     |
| Pack of 20<br>MERC. ALUM.*<br><b>18709-MAL</b>                                      | NEP. STEEL<br><b>18709-ANL</b>                                                      |                                                                                     |                                                                                     |

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 20<br>WHITE*<br><b>18709</b>                                                | BEIGE<br><b>18709-A</b>                                                             | ODYSSEY GOLD<br><b>18709-OD</b>                                                     | CHOCOLATE*<br><b>18709-CH</b><br>Pack of 2                                          |
|  |  |                                                                                     |                                                                                     |
| Pack of 20<br>MERC. ALUM.*<br><b>18709-MA</b>                                       | NEP. STEEL<br><b>18709-AN</b>                                                       |                                                                                     |                                                                                     |

Mega / Iris Plus\*

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 2<br>FUSION ALUM.<br><b>22709-AFL</b>                                         | PRUSS. ALUM.<br><b>22709-APL</b>                                                      | MALT GOLD<br><b>22709-DML</b>                                                         | PEARL WHITE<br><b>22709-BPL</b>                                                       |
|  |  |  |  |
| Pack of 2<br>MISTY BRON.<br><b>22709-BNL</b>                                          | SAMOA BR.<br><b>22709-MSL</b>                                                         | SATIN WHITE<br><b>22709-BSL</b>                                                       | COSSO AN.*<br><b>22709-ACL</b>                                                        |

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 2<br>FUSION ALUM.<br><b>22709-AF</b>                                          | PRUSS. ALUM.<br><b>22709-AP</b>                                                       | MALT GOLD<br><b>22709-DM</b>                                                          | PEARL WHITE<br><b>22709-BP</b>                                                        |
|  |  |  |  |
| Pack of 2<br>MISTY BRON.<br><b>22709-BN</b>                                           | SAMOA BR.<br><b>22709-MS</b>                                                          | SATIN WHITE<br><b>22709-BS</b>                                                        | COSSO AN.*<br><b>22709-AC</b>                                                         |

Mechanisms



**Two-way switch + Push-button** 18515  
16 A + 10 A 250 V~

Pack of 10




\*The colours of the Iris Plus frames match those marked with an asterisk





Iris / Iris Plus\*

|                                                                                    |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| Pack of 20<br>WHITE*<br><b>18715-L</b>                                             | ODYSSEY GOLD<br><b>18715-ODL</b>                                                    | CHOCOLATE*<br><b>18715-CHL</b><br>Pack of 2                                         |
|  |  |                                                                                     |
| Pack of 20<br>MERC. ALUM.*<br><b>18715-MAL</b>                                     | NEP. STEEL<br><b>18715-ANL</b>                                                      |                                                                                     |

|                                                                                    |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| Pack of 20<br>WHITE*<br><b>18715</b>                                               | ODYSSEY GOLD<br><b>18715-OD</b>                                                     | CHOCOLATE*<br><b>18715-CH</b><br>Pack of 2                                          |
|  |  |                                                                                     |
| Pack of 20<br>MERC. ALUM.*<br><b>18715-MA</b>                                      | NEP. STEEL<br><b>18715-AN</b>                                                       |                                                                                     |

Mega / Iris Plus\*

|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 2<br>FUSION ALUM.<br><b>22715-AFL</b>                                        | PRUSS. ALUM.<br><b>22715-APL</b>                                                      | MALT GOLD<br><b>22715-DML</b>                                                         | PEARL WHITE<br><b>22715-BPL</b>                                                       |
|  |  |  |  |
| Pack of 2<br>MISTY BRON.<br><b>22715-BNL</b>                                         | SAMOA BR.<br><b>22715-MSL</b>                                                         | SATIN WHITE<br><b>22715-BSL</b>                                                       | COSSO AN.*<br><b>22715-ACL</b>                                                        |

|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 2<br>FUSION ALUM.<br><b>22715-AF</b>                                         | PRUSS. ALUM.<br><b>22715-AP</b>                                                       | MALT GOLD<br><b>22715-DM</b>                                                          | PEARL WHITE<br><b>22715-BP</b>                                                        |
|  |  |  |  |
| Pack of 2<br>MISTY BRON.<br><b>22715-BN</b>                                          | SAMOA BR.<br><b>22715-MS</b>                                                          | SATIN WHITE<br><b>22715-BS</b>                                                        | COSSO AN.*<br><b>22715-AC</b>                                                         |

Push-button mechanisms



**Push-button** 18516  
**Normally-closed push-button** 18512  
10 A 250 V~

Pack of 10



Note:  
Engraving of picto-  
grams on request  


\*The colours of the Iris Plus frames match those marked with an asterisk




 Bell switch  
 Light switch



Iris / Iris Plus\*

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 20<br>WHITE*<br><b>18716-L</b>                                              | BEIGE<br><b>18716-AL</b>                                                            | ODYSSEY GOLD<br><b>18716-ODL</b>                                                    | CHOCOLATE*<br><b>18716-CHL</b><br>Pack of 2                                         |
|  |  |                                                                                     |                                                                                     |
| Pack of 20<br>MERC. ALUM.*<br><b>18716-MAL</b>                                      | NEP. STEEL<br><b>18716-ANL</b>                                                      |                                                                                     |                                                                                     |
|  |  |                                                                                     |                                                                                     |
| Pack of 20<br><b>18717-MAL</b>                                                      | <b>18717-ANL</b>                                                                    |                                                                                     |                                                                                     |

|                                                                                       |                                                                                       |                                                                                     |                                                                                     |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|    |    |  |  |
| Pack of 20<br>WHITE*<br><b>18716</b>                                                  | BEIGE<br><b>18716-A</b>                                                               | ODYSSEY GOLD<br><b>18716-OD</b>                                                     | CHOCOLATE*<br><b>18716-CH</b><br>Pack of 2                                          |
|   |   |                                                                                     |                                                                                     |
| Pack of 20<br>MERC. ALUM.*<br><b>18716-MA</b>                                         | NEP. STEEL<br><b>18716-AN</b>                                                         |                                                                                     |                                                                                     |
|  |  |                                                                                     |                                                                                     |
| Pack of 20<br><b>18717-MA</b>                                                         | <b>18717-AN</b>                                                                       |                                                                                     |                                                                                     |

Mega / Iris Plus\*

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 2<br>FUSION ALUM.<br><b>22716-AFL</b>                                         | PRUSS. ALUM.<br><b>22716-APL</b>                                                      | MALT GOLD<br><b>22716-DML</b>                                                         | PEARL WHITE<br><b>22716-BPL</b>                                                       |
|  |  |  |  |
| Pack of 2<br>MISTY BRON.<br><b>22716-BNL</b>                                          | SAMOA BR.<br><b>22716-MSL</b>                                                         | SATIN WHITE<br><b>22716-BSL</b>                                                       | COSSO AN.*<br><b>22716-ACL</b>                                                        |
|  |  |  |  |
| Pack of 2<br>MISTY BRON.<br><b>22717-AFL</b>                                          | PRUSS. ALUM.<br><b>22717-APL</b>                                                      | MALT GOLD<br><b>22717-DML</b>                                                         | PEARL WHITE<br><b>22717-BPL</b>                                                       |
|  |  |  |  |
| Pack of 2<br><b>22717-BNL</b>                                                         | <b>22717-MSL</b>                                                                      | <b>22717-BSL</b>                                                                      | <b>22717-ACL</b>                                                                      |

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 2<br>FUSION ALUM.<br><b>22716-AF</b>                                          | PRUSS. ALUM.<br><b>22716-AP</b>                                                       | MALT GOLD<br><b>22716-DM</b>                                                          | PEARL WHITE<br><b>22716-BP</b>                                                        |
|  |  |  |  |
| Pack of 2<br>MISTY BRON.<br><b>22716-BN</b>                                           | SAMOA BR.<br><b>22716-MS</b>                                                          | SATIN WHITE<br><b>22716-BS</b>                                                        | COSSO AN.*<br><b>22716-AC</b>                                                         |
|  |  |  |  |
| Pack of 2<br><b>22717-BN</b>                                                          | <b>22717-MS</b>                                                                       | <b>22717-BS</b>                                                                       | <b>22717-AC</b>                                                                       |



Push-button mechanisms

Continued...

Switch with lighted labelling field

If you want the unit to have a lens, add an indicator  
Ref. 18039-2AZ

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*



Pack of 20  
**18714**



ODYSSEY GOLD  
**18714-OD**



CHOCOLATE\*  
**18714-CH**  
Pack of 1



Pack of 20  
**18714-MA**



NEP. STEEL  
**18714-AN**

Mega / Iris Plus\*



Pack of 1  
**22714-AF**



PRUSS. ALUM.  
**22714-AP**



MALT GOLD  
**22714-DM**



PEARL WHITE  
**22714-BP**



Pack of 1  
**22714-BN**



SAMOA BR.  
**22714-MS**



SATIN WHITE  
**22714-BS**



COSSO AN.\*  
**22714-AC**

Indicator lights



**Blue LED indicator light** **18039-1AZ**  
230 V~  
Indicator lights for 2 pole one-way switches and single pole one-way switches with control light  
Wide switch

18039-1AZ Pack of 5



**Blue LED indicator light** **18039-2AZ**  
230 V~  
Indicator lights for one-way and two-way and intermediate switches and push-buttons  
Wide switch

18039-2AZ Pack of 10



**Blue LED indicator light** **18039-3AZ**  
230 V~  
Indicator lights for all the different kinds of mechanisms  
Narrow rocker

18039-3AZ Pack of 10



**Load for use of indicators with energy-saving or fluorescent lamps** **3139**

Pack of 1

Mechanisms for blinds



**Double push-button for blinds with electrical interlocking device** **18565**  
**Double one-way switch for blinds** **18569**

With electrical and mechanical interlocking device  
10 A 250 V~

Pack of 10

**Double push-button for blinds** **18511**  
Requires auxiliary device specific to each blind manufacturer  
No interlocking device  
10 A 250 V~

Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk



**Blind controller for installation in a flush-mounting box** **2393**

Blind control (insert) for 230 V single-phase motors  
Max power: 1250 VA  
Local or centralised operation  
Operation adjustable from 1 to 120 sec.  
Dimensions: 47.5 x 47.5 x 20 mm  
For installation with double push-buttons (18511)

Pack of 1

Iris / Iris Plus\*



Pack of 20  
**18765**



BEIGE  
**18765-A**



ODYSSEY GOLD  
**18765-OD**



CHOCOLATE\*  
**18765-CH**  
Pack of 2



Pack of 20  
**18765-MA**



NEP. STEEL  
**18765-AN**

Mega / Iris Plus\*



Pack of 2  
**22765-AF**



PRUSS. ALUM.  
**22765-AP**



MALT GOLD  
**22765-DM**



PEARL WHITE  
**22765-BP**



Pack of 2  
**22765-BN**



SAMOA BR.  
**22765-MS**



SATIN WHITE  
**22765-BS**



COSSO AN.\*  
**22765-AC**



Available with STOP marking. Check availability.

Push-button mechanisms



**Cord operated push-button** 18521  
**Cord operated two-way switch** 18598  
10 A 250 V~  
Not suitable for claws

Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*



Pack of 10



Pack of 10

Mega / Iris Plus\*



Pack of 1



Pack of 1

Key card mechanism




**One-way switch for a timed key card** 18668

125-230 V~ 50/60 Hz  
Resistive loads 10 A  
Inductive loads 8 A  $\cos \phi = 0,4$   
Switch-off delay 1 min  
LED indicator light  
Mechanism not suitable for claws


Pack of 1

Can only be assembled on 1-gang 18200 frames

Iris

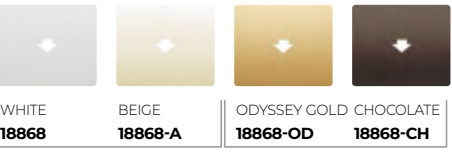

Pack of 10



Pack of 1

Iris frame for a timed key card switch



Pack of 10



Pack of 1

**One-way / two-way switch for a key card with 1 built-in microswitch and indicator light**

With built-in lamp  
250VAC - 10A resistive load / 1.5A inductive load

The use of a contactor for inductive loads is recommended

\*The colours of the Iris Plus frames match those marked with an asterisk

**Microswitch for key card switch** 2368

Allows you to replace or add a microswitch to a 22068 key card switch

Pack of 10



Iris / Iris Plus\*



Pack of 1



Pack of 1

Mega / Iris Plus\*



Pack of 1




Pack of 1



Rotary switches



**Rotary switch** **18596**  
16 A 250 V~  
Not suitable for claws  
APPLICATIONS: Changeover between fan speeds, fan coils...  
  
Pack of 1  
  
4 positions, 3 circuits.  
Connection by Faston 6.3x0.8 mm.



\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

  
Pack of 10  
**WHITE\***  
**18796**

  
Pack of 10  
**BEIGE**  
**18796-A**

  
Pack of 10  
**ODYSSEY GOLD**  
**18796-OD**

  
Pack of 1  
**CHOCOLATE\***  
**18796-CH**

  
Pack of 10  
**MERC. ALUM.\***  
**18796-MA**

  
Pack of 10  
**NEP. STEEL**  
**18796-AN**

  
Pack of 1  
**COSSO AN.\***  
**22796-AC**

Dimmer



**A two-way dimmer for high- and low-voltage LED, incandescent and halogen lamps with a magnetic transformer** **21550-X**  
Power supply: 230 V / 50 Hz  
LED: 230V 3-85W  
Direct halogens: 20-250W  
Halogens with a ferromagnetic transformer: 20-250VA  
Fuse: T2AH/250V  
Screw connection  
Phase shut-off: Leading-Edge  
Pack of 1



**A two-way dimmer for high- and low-voltage incandescent and halogen lamps with a magnetic transformer** **21553-X**  
Power supply: 230VAC / 50Hz  
Halogens with a ferromagnetic transformer: 20-500VA  
Direct halogens: 20-500W  
Fuse: T2AH/250V  
Screw connection  
Phase shut-off: Leading-Edge  
Pack of 1



**Device for controlling luminaires with 1-10V fluorescence regulation** **21555-X**  
Power supply: 230VAC 50-60Hz  
Control voltage: 1-12V  
Maximum control current: 40mA  
Load connection: 10A  
Fuse: F0.8/250V  
Screw connection  
Pack of 1

Iris / Iris Plus\*

  
Pack of 10  
**WHITE\***  
**18749**

  
Pack of 10  
**BEIGE**  
**18749-A**

  
Pack of 1  
**ODYSSEY GOLD**  
**18749-OD**

  
Pack of 1  
**CHOCOLATE\***  
**18749-CH**

  
Pack of 1  
**MERC. ALUM.\***  
**18749-MA**

  
Pack of 1  
**NEP. STEEL**  
**18749-AN**

\*The colours of the Iris Plus frames match those marked with an asterisk

Mega / Iris Plus\*

  
Pack of 1  
**FUSION ALUM.**  
**22749-AF**

  
Pack of 1  
**PRUSS. ALUM.**  
**22749-AP**

  
Pack of 1  
**MALT GOLD**  
**22749-DM**

  
Pack of 1  
**PEARL WHITE**  
**22749-BP**

  
Pack of 1  
**MISTY BRON.**  
**22749-BN**

  
Pack of 1  
**SAMOA BR.**  
**22749-MS**

  
Pack of 1  
**SATIN WHITE**  
**22749-BS**

  
Pack of 1  
**COSSO AN.\***  
**22749-AC**

Dimmers for push-buttons



**Universal tablet dimmer with load adjustment** **DIP-RLC**  
  
R, L, C, LED, ESL  
Power supply voltage 230V - 50/60Hz  
Consumption: 3W  
Suitable for 230V halogen lamps, halogen lamps with ferromagnetic trans., halogen lamps with electronic trans. and LED loads 230V  
  
Pack of 1

Load connection

| LOAD TYPE |  |  |  |  |  |  |  |  |
|-----------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 21553-X   | Rotary                                                                                | 20-500W                                                                               | 20-500 VA                                                                             | NO                                                                                    | NO                                                                                    | NO                                                                                    | NO                                                                                    | NO                                                                                    |
| 21555-X   | Rotary                                                                                | NO                                                                                    | NO                                                                                    | NO                                                                                    | NO                                                                                    | NO                                                                                    | NO                                                                                    | 1-10 V                                                                                |
| 21550-X   | Rotary                                                                                | 20-250W                                                                               | 20-250 VA                                                                             | NO                                                                                    | 3-85W                                                                                 | NO                                                                                    | NO                                                                                    | NO                                                                                    |
| DIP-RLC   | Push-button                                                                           | 160W                                                                                  | 160 VA                                                                                | 160W                                                                                  | 50-160W                                                                               | NO                                                                                    | 160W                                                                                  | NO                                                                                    |

A list of compatibility-tested LED lamps is available at [www.bjc.es/documentation](http://www.bjc.es/documentation)

Socket outlets with safety protection



**Schuko® socket outlet (lateral earthing) with safety protection**  
Screwed terminals 16 A 250 V~

Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk

Identification for special circuits



Pack of 10  
**RED 18724-R**

**Hinged cover for a Schuko® socket outlet (lateral earthing)**

\*The colours of the Iris Plus frames match those marked with an asterisk

**Schuko® socket outlet (lateral earthing) with safety protection and built-in BJC Iris frame (monoblock)**  
16 A 250 V~  
Screwed terminals

Pack of 10



WHITE  
**18024**

BEIGE  
**18024-A**

**Iris / Iris Plus\***



Pack of 10  
**WHITE\* 18724**

BEIGE  
**18724-A**

ODYSSEY GOLD  
**18724-OD**

CHOCOLATE\*  
**18724-CH**  
Pack of 1



Pack of 10  
**MERC. ALUM.\* 18724-MA**

NEP. STEEL  
**18724-AN**

**Mega / Iris Plus\***



Pack of 1  
**FUSION ALUM. 22724-AF**

PRUSS. ALUM.  
**22724-AP**

MALT GOLD  
**22724-DM**

PEARL WHITE  
**22724-BP**

Pack of 1  
**MISTY BRON. 22724-BN**

SAMOA BR.  
**22724-MS**

SATIN WHITE  
**22724-BS**

COSSO AN.\*  
**22724-AC**

**Iris / Iris Plus\***



Pack of 1  
**WHITE\* 18725**

ODYSSEY GOLD  
**18725-OD**

CHOCOLATE\*  
**18725-CH**

MERC. ALUM.\*  
**18725-MA**



Pack of 1  
**NEP. STEEL 18725-AN**

**Mega / Iris Plus\***



Pack of 1  
**FUSION ALUM. 22725-AF**

PEARL WHITE  
**22725-BP**

SATIN WHITE  
**22725-BS**

COSSO AN.\*  
**22725-AC**

Socket outlets with safety protection



Erp

**2P-T Schuko® socket outlet with dual USB type A and type C charger with fast charging capacity and Power Delivery**  
18524-USBC

Schuko® socket outlet  
- 230Vac 50Hz, 16A  
- Screwless terminal

Dual USB charger:  
- 1 USB type A socket and 1 USB type C socket  
- Maximum power: 20W  
- Quick charge Power Delivery USB C: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Quick charge USB A: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Normal charge:  
  - 5V/3.4A when using USB A and USB C at the same time  
  - 5V/2.4A when using USB A or USB C individually  
- Short circuit protection  
- Temperature protection

Compliant with UNE 20315-1-1/1-2 and EN 62368-1 standards

Pack of 1

\*The colours of the Iris Plus frames match those marked with an asterisk

Socket outlets  
25 A socket outlet



WHITE  
**2225**

**25 A socket outlet**  
25 A 250 V~ 85 x 85 x 35 mm  
Accepts any Schuko® 25 A plug  
250 V~ S/UNE 20315  
The terminals accept cables up to 10 mm² cross-section  
The most suitable box for this socket outlet is Ref. 2373-I and hollow partition boxes 2341 to 2345.

Pack of 5

25 A plug



**Schuko® plug**  
25 A 250 V~

Pack of 10

WHITE  
**2224-B**



Socket outlets



**Schuko® socket outlet (lateral earthing) with screwless terminal**  
**With claws** 19532-X  
**Without claws** 19532  
Screwless terminals 16 A 250 V~

Pack of 10

**Cover with safety protection**

\*The colours of the Iris Plus frames match those marked with an asterisk

**Cover with safety protection**

**Cover with diffuser and safety protection (supplied with indicator light for Schuko socket outlet 2394)**


**Cover with diffuser and safety protection (supplied with indicator light for Schuko socket outlet 2394)**

Iris / Iris Plus\*



Pack of 10  
WHITE\* 18732  
BEIGE 18732-A  
ODYSSEY GOLD 18732-OD  
MERC. ALUM.\* 18732-MA  
NEP. STEEL 18732-AN

Mega / Iris Plus\*



Pack of 1  
FUSION ALUM. 22732-AF  
PRUSS. ALUM. 22732-AP  
MALT GOLD 22732-DM  
PEARL WHITE 22732-BP



Pack of 1  
MISTY BRON. 22732-BN  
SAMOA BR. 22732-MS  
SATIN WHITE 22732-BS  
COSSO AN.\* 22732-AC

Iris / Iris Plus\*



Pack of 1  
WHITE\* 18732-L  
ODYSSEY GOLD 18732-ODL  
MERC. ALUM.\* 18732-MAL  
NEP. STEEL 18732-ANL

Mega / Iris Plus\*



Pack of 1  
FUSION ALUM. 22732-AFL  
PRUSS. ALUM. 22732-APL  
MALT GOLD 22732-DML  
PEARL WHITE 22732-BPL



Pack of 1  
MISTY BRON. 22732-BNL  
SAMOA BR. 22732-MSL  
SATIN WHITE 22732-BSL  
COSSO AN.\* 22732-ACL

Socket outlets (French standard)



**2P+E socket outlet (French standard) with safety protection**

18572

Screwed terminals 16 A 250 V~

Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*



Pack of 10  
WHITE\* 18772  
BEIGE 18772-A  
ODYSSEY GOLD 18772-OD  
CHOCOLATE\* 18772-CH  
Pack of 1




Pack of 10  
MERC. ALUM.\* 18772-MA  
NEP. STEEL 18772-AN

Mega / Iris Plus\*



Pack of 1  
FUSION ALUM. 22772-AF  
PRUSS. ALUM. 22772-AP  
MALT GOLD 22772-DM  
PEARL WHITE 22772-BP



Pack of 1  
MISTY BRON. 22772-BN  
SAMOA BR. 22772-MS  
SATIN WHITE 22772-BS  
COSSO AN.\* 22772-AC

French socket with dual USB charger



**French socket outlet with dual USB Type A and Type C charger with fast charging and Power Delivery**

18572-USBC

Socket outlet  
- 230Vac 50Hz, 16A  
- Screwless terminal

Dual USB charger:  
- 1 USB type A socket and 1 USB type C socket  
- Maximum power: 20W  
- Quick charge Power Delivery USB C: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Quick charge USB A: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Normal charge:  
  - 5V/3.4A when using USB A and USB C at the same time  
  - 5V/2.4A when using USB A or USB C individually  
- Short circuit protection  
- Temperature protection

Compliant with UNE 20315-1-1/1-2 and EN 62368-1 standards

Pack of 1

Check availability.

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*




Pack of 10  
WHITE\* 18772-USBC  
ODYSSEY GOLD 18772-USBC-OD  
CHOCOLATE\* 18772-USBC-CH



Pack of 10  
MERC. ALUM.\* 18772-USBC-MA  
NEP. STEEL 18772-USBC-AN

Mega / Iris Plus\*



Pack of 10  
FUSION ALUM. 22772-USBC-AF  
PRUSS. ALUM. 22772-USBC-AP  
MALT GOLD 22772-USBC-DM  
PEARL WHITE 22772-USBC-BP



Pack of 10  
MISTY BRON. 22772-USBC-BN  
SAMOA BR. 22772-USBC-MS  
SATIN WHITE 22772-USBC-BS  
COSSO AN.\* 22772-USBC-AC

Iris, Iris Plus and Mega

BJC

IP44 switch solutions



**Single pole one-way switch** 18505  
**Two-way switch** 18506  
16 A 250 V~  
**Intermediate switch** 18507  
10 A 250 V~  
Pack of 10

**Iris / Iris Plus\*** **Hinged covers with safety protection and gaskets**

|           |                    |                             |                           |                             |                           |
|-----------|--------------------|-----------------------------|---------------------------|-----------------------------|---------------------------|
| Pack of 1 | WHITE*<br>18705-IP | ODYSSEY GOLD<br>18705-IP-OD | CHOCOLATE*<br>18705-IP-CH | MERC. ALUM.*<br>18705-IP-MA | NEP. STEEL<br>18705-IP-AN |
|-----------|--------------------|-----------------------------|---------------------------|-----------------------------|---------------------------|

**Mega / Iris Plus\*** **Hinged covers with safety protection and gaskets**

|           |                             |                            |                            |                           |
|-----------|-----------------------------|----------------------------|----------------------------|---------------------------|
| Pack of 1 | FUSION ALUM.<br>22705-IP-AF | PEARL WHITE<br>22705-IP-BP | SATIN WHITE<br>22705-IP-BS | COSSO AN.*<br>22705-IP-AC |
|-----------|-----------------------------|----------------------------|----------------------------|---------------------------|

\*The colours of the Iris Plus frames match those marked with an asterisk



**Double one-way switch** 18509  
**Double two-way switch** 18510  
16 A 250 V~  
**Double push-button** 18511  
10 A 250 V~  
**Double normally-closed push-button** 18513  
10 A 250 V~  
Pack of 10

**Iris / Iris Plus\*** **Hinged covers with safety protection and gaskets**

|           |                    |                             |                           |                             |                           |
|-----------|--------------------|-----------------------------|---------------------------|-----------------------------|---------------------------|
| Pack of 1 | WHITE*<br>18709-IP | ODYSSEY GOLD<br>18709-IP-OD | CHOCOLATE*<br>18709-IP-CH | MERC. ALUM.*<br>18709-IP-MA | NEP. STEEL<br>18709-IP-AN |
|-----------|--------------------|-----------------------------|---------------------------|-----------------------------|---------------------------|

**Mega / Iris Plus\*** **Hinged covers with safety protection and gaskets**

|           |                             |                            |                            |                           |
|-----------|-----------------------------|----------------------------|----------------------------|---------------------------|
| Pack of 1 | FUSION ALUM.<br>22709-IP-AF | PEARL WHITE<br>22709-IP-BP | SATIN WHITE<br>22709-IP-BS | COSSO AN.*<br>22709-IP-AC |
|-----------|-----------------------------|----------------------------|----------------------------|---------------------------|

\*The colours of the Iris Plus frames match those marked with an asterisk



**Push-button** 18516  
**Normally-closed push-button** 18512  
10 A 250 V~  
Pack of 10

Note:  
Engraving of pictograms on request

Bell switch  
 Light switch

WC

\*The colours of the Iris Plus frames match those marked with an asterisk

These IP44 solutions are compatible with the standard frames in the series.

IP44 socket solutions



**Schuko® socket outlet (lateral earthing)** 18524  
**With safety protection**  
Screwed terminals 16 A 250 V~  
Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk

**Iris / Iris Plus\*** **Hinged covers with safety protection and gaskets**


|           |                    |                             |                           |                             |                           |
|-----------|--------------------|-----------------------------|---------------------------|-----------------------------|---------------------------|
| Pack of 1 | WHITE*<br>18725-IP | ODYSSEY GOLD<br>18725-IP-OD | CHOCOLATE*<br>18725-IP-CH | MERC. ALUM.*<br>18725-IP-MA | NEP. STEEL<br>18725-IP-AN |
|-----------|--------------------|-----------------------------|---------------------------|-----------------------------|---------------------------|

**Mega / Iris Plus\*** **Hinged covers with safety protection and gaskets**

|           |                             |                            |                            |                           |
|-----------|-----------------------------|----------------------------|----------------------------|---------------------------|
| Pack of 1 | FUSION ALUM.<br>22725-IP-AF | PEARL WHITE<br>22725-IP-BP | SATIN WHITE<br>22725-IP-BS | COSSO AN.*<br>22725-IP-AC |
|-----------|-----------------------------|----------------------------|----------------------------|---------------------------|



Iris Schuko® IP44 exploded view:

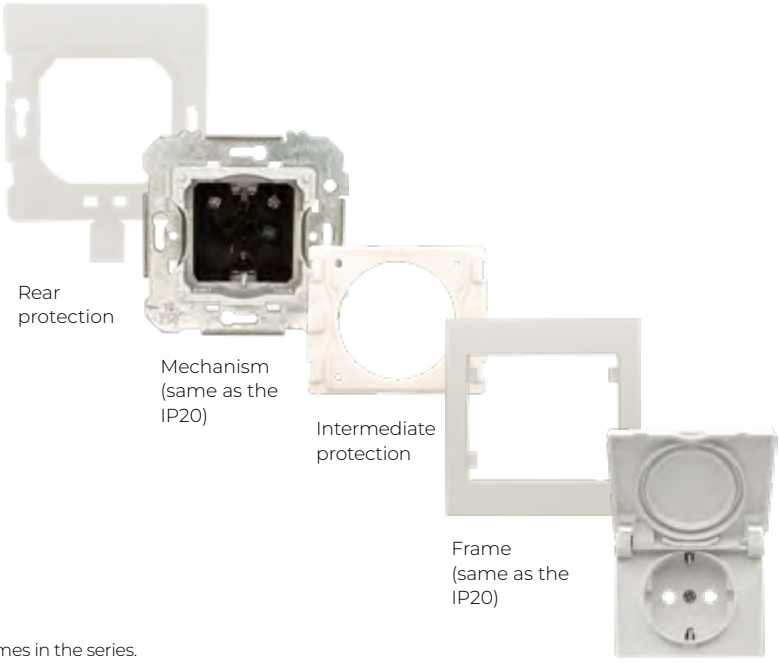


These IP44 solutions are compatible with the standard frames in the series.



Socket solutions for TV-FM-R/TV-SAT IP44

IP44



**TV\_FM socket outlet**  
**Series 2-10**  
**Final outlet**  
**Individual installation**  
(Manufacturer: TELEVÉS)

2932  
2933  
2934

Pack of 10

**Iris / Iris Plus\***

Hinged covers with safety protection and gaskets

|           |          |              |             |              |             |
|-----------|----------|--------------|-------------|--------------|-------------|
| Pack of 1 | WHITE*   | ODYSSEY GOLD | CHOCOLATE*  | MERC. ALUM.* | NEP. STEEL  |
|           | 18320-IP | 18320-IP-OD  | 18320-IP-CH | 18320-IP-MA  | 18320-IP-AN |

**Mega / Iris Plus\***

Hinged covers with safety protection and gaskets

|           |              |             |             |             |
|-----------|--------------|-------------|-------------|-------------|
| Pack of 1 | FUSION ALUM. | PEARL WHITE | SATIN WHITE | COSSO AN.*  |
|           | 22320-IP-AF  | 22320-IP-BP | 22320-IP-BS | 22320-IP-AC |



**R/TV-SAT socket with 2 outputs**  
**Series 6-12**  
**Series 2-5**  
**Final outlet**  
**Individual installation**  
(Manufacturer: TELEVÉS)

2921  
2922  
2923  
2924

Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk

RJ IP44 connectivity terminals

IP44



**8-way female RJ45 connector Cat. 6**  
Tool-free connection by insulation piercing

18586

Pack of 10



**Adapter for 1 RJ45/RJ11 connector (AMP, ITT, etc.)**

19582-1

Pack of 10



**Standard Keystone RJ45 connector**  
Cat. 6  
White  
Tool-free terminal

3186-B

Pack of 25

**Iris / Iris Plus\***


Hinged covers with safety protection and gaskets

|           |          |              |             |              |             |
|-----------|----------|--------------|-------------|--------------|-------------|
| Pack of 1 | WHITE*   | ODYSSEY GOLD | CHOCOLATE*  | MERC. ALUM.* | NEP. STEEL  |
|           | 19782-IP | 19782-IP-OD  | 19782-IP-CH | 19782-IP-MA  | 19782-IP-AN |


**Mega / Iris Plus\***

Hinged covers with safety protection and gaskets

|           |              |             |             |             |
|-----------|--------------|-------------|-------------|-------------|
| Pack of 1 | FUSION ALUM. | PEARL WHITE | SATIN WHITE | COSSO AN.*  |
|           | 22782-IP-AF  | 22782-IP-BP | 22782-IP-BS | 22782-IP-AC |

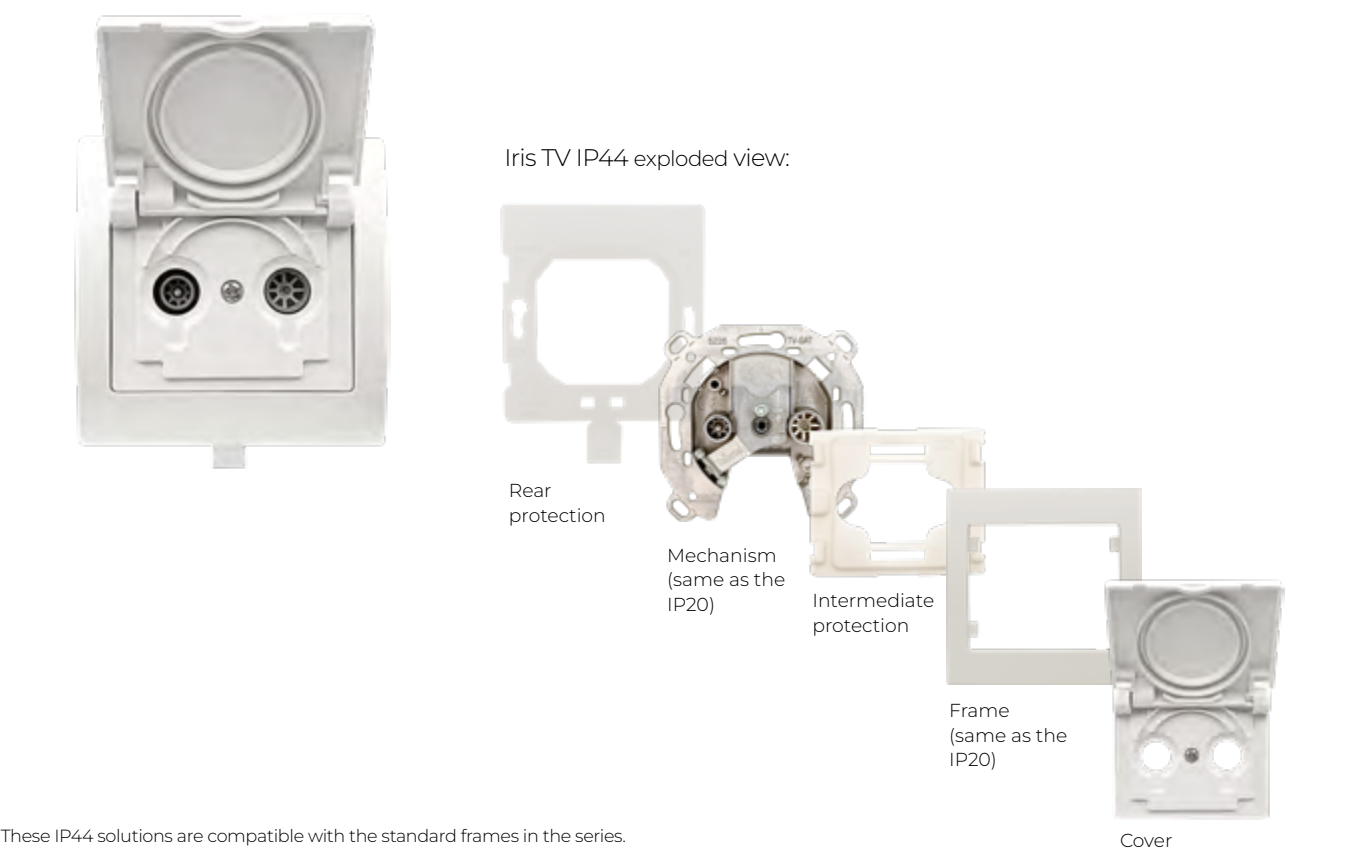

These IP44 solutions are compatible with the standard frames in the series.

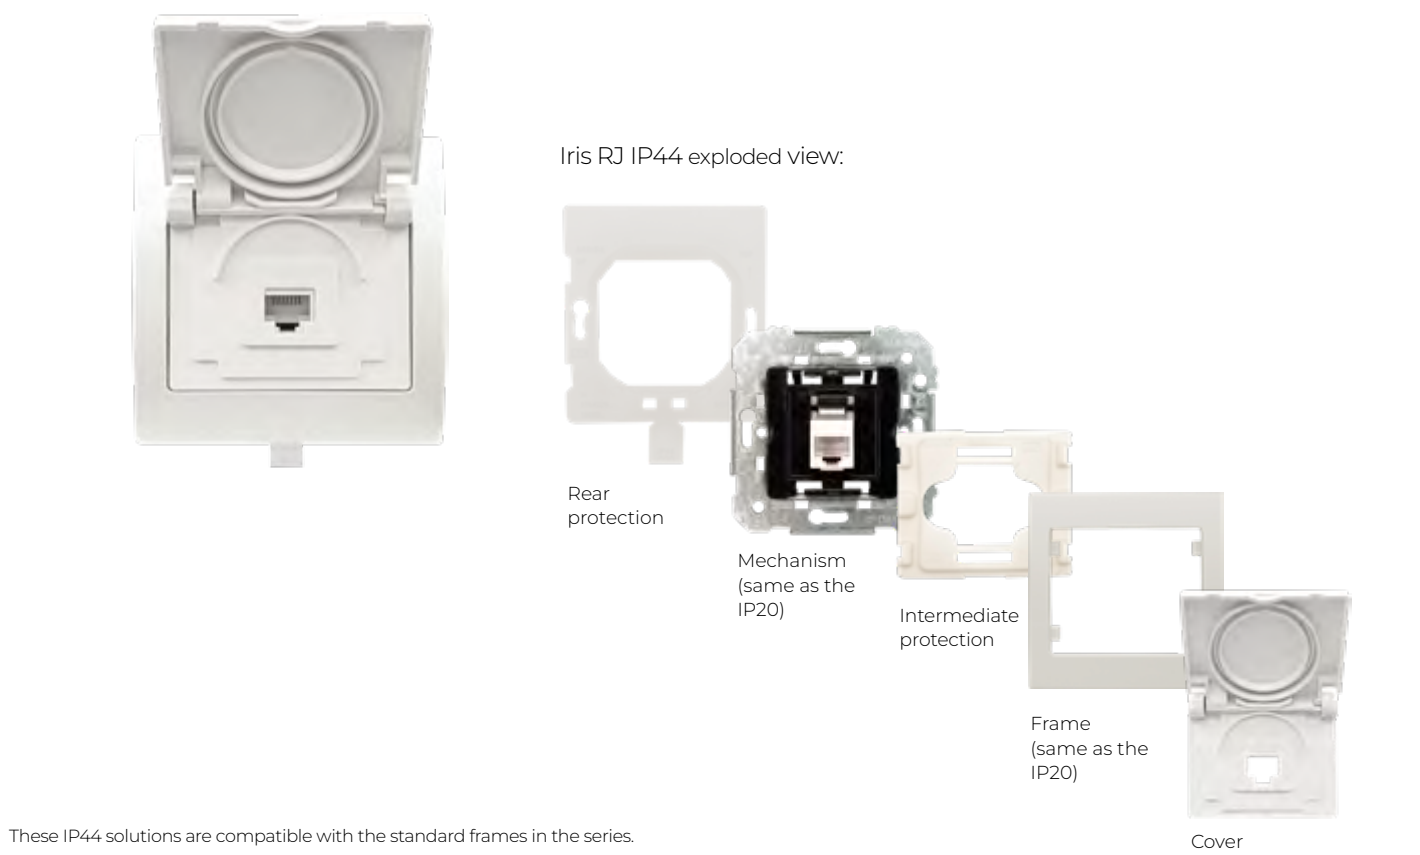

These IP44 solutions are compatible with the standard frames in the series.

Assorted mechanisms



**Cable output** **18534**  
With 3 x 1.5 mm<sup>2</sup> terminal  
Cable Ø maximum 10 mm  
Not suitable for claws  
  
Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk



**Pilot light** **18530**  
Works with E10 bulb  
3 W 230 V or equivalent LED.  
The bulb is not supplied with the equipment.  
  
Pack of 10  
  
Not suitable for permanent beaconing if a LED lamp is not used (not supplied)  
  
Red diffuser    Amber diffuser    Glass diffuser    Green diffuser  
     
**18630-R   18630-AB   18630-C   18630-V**  
Pack of 10   Pack of 10   Pack of 10   Pack of 10  
Not suitable for claws  
Covers for buzzer and pilot light

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|            |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|            |  |  |  |  |
| Pack of 10 | WHITE*<br><b>18734</b>                                                             | BEIGE<br><b>18734-A</b>                                                             | ODYSSEY GOLD<br><b>18734-OD</b>                                                     | CHOCOLATE*<br><b>18734-CH</b><br>Pack of 1                                          |
|            |  |  |                                                                                     |                                                                                     |
| Pack of 10 | MERC. ALUM.*<br><b>18734-MA</b>                                                    | NEP. STEEL<br><b>18734-AN</b>                                                       |                                                                                     |                                                                                     |

Mega / Iris Plus\*

|           |                                                                                     |                                                                                      |                                                                                      |                                                                                      |
|-----------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|           |   |   |   |   |
| Pack of 1 | FUSION ALUM.<br><b>22734-AF</b>                                                     | PRUSS. ALUM.<br><b>22734-AP</b>                                                      | MALT GOLD<br><b>22734-DM</b>                                                         | PEARL WHITE<br><b>22734-BP</b>                                                       |
|           |  |  |  |  |
| Pack of 1 | MISTY BRON.<br><b>22734-BN</b>                                                      | SAMOA BR.<br><b>22734-MS</b>                                                         | SATIN WHITE<br><b>22734-BS</b>                                                       | COSSO AN.*<br><b>22734-AC</b>                                                        |

Iris / Iris Plus\*

|            |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|            |  |  |  |  |
| Pack of 10 | WHITE*<br><b>18730</b>                                                               | BEIGE<br><b>18730-A</b>                                                               | ODYSSEY GOLD<br><b>18730-OD</b>                                                       | CHOCOLATE*<br><b>18730-CH</b><br>Pack of 1                                            |
|            |  |  |                                                                                       |                                                                                       |
| Pack of 10 | MERC. ALUM.*<br><b>18730-MA</b>                                                      | NEP. STEEL<br><b>18730-AN</b>                                                         |                                                                                       |                                                                                       |

Mega / Iris Plus\*

|           |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|-----------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|           |  |  |  |  |
| Pack of 1 | FUSION ALUM.<br><b>22730-AF</b>                                                      | PRUSS. ALUM.<br><b>22730-AP</b>                                                       | MALT GOLD<br><b>22730-DM</b>                                                          | PEARL WHITE<br><b>22730-BP</b>                                                        |
|           |  |  |  |  |
| Pack of 1 | MISTY BRON.<br><b>22730-BN</b>                                                       | SAMOA BR.<br><b>22730-MS</b>                                                          | SATIN WHITE<br><b>22730-BS</b>                                                        | COSSO AN.*<br><b>22730-AC</b>                                                         |

Assorted mechanisms



**Buzzer with tone regulation**  
White  
Black  
Beige  
  
**18536-B  
18536  
18536-A**  
  
230 V~ 50 Hz  
Intermittent Use  
  
Pack of 10



\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|            |  |  |  |  |
| Pack of 10 | WHITE*<br><b>18730</b>                                                              | BEIGE<br><b>18730-A</b>                                                             | ODYSSEY GOLD<br><b>18730-OD</b>                                                     | CHOCOLATE*<br><b>18730-CH</b><br>Pack of 1                                          |
|            |  |  |                                                                                     |                                                                                     |
| Pack of 10 | MERC. ALUM.*<br><b>18730-MA</b>                                                     | NEP. STEEL<br><b>18730-AN</b>                                                       |                                                                                     |                                                                                     |

Mega / Iris Plus\*

|           |                                                                                      |                                                                                      |                                                                                      |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|           |   |   |   |   |
| Pack of 1 | FUSION ALUM.<br><b>22730-AF</b>                                                      | PRUSS. ALUM.<br><b>22730-AP</b>                                                      | MALT GOLD<br><b>22730-DM</b>                                                         | PEARL WHITE<br><b>22730-BP</b>                                                       |
|           |  |  |  |  |
| Pack of 1 | MISTY BRON.<br><b>22730-BN</b>                                                       | SAMOA BR.<br><b>22730-MS</b>                                                         | SATIN WHITE<br><b>22730-BS</b>                                                       | COSSO AN.*<br><b>22730-AC</b>                                                        |

Assorted mechanisms



**LED beacon light**  
Cold white  
Warm white  
230 Vac 0.4 W  
5 Lm

**18531**  
**18531-4**

Pack of 1

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 10<br><b>WHITE*</b><br><b>18742</b>                                        | <b>BEIGE</b><br><b>18742-A</b>                                                      | <b>ODYSSEY GOLD</b><br><b>18742-OD</b>                                              | <b>CHOCOLATE*</b><br><b>18742-CH</b><br>Pack of 1                                   |



Pack of 10  
**MERC. ALUM.\***  
**18742-MA**

**NEP. STEEL**  
**18742-AN**

Mega / Iris Plus\*

|                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br><b>FUSION ALUM.</b><br><b>22742-AF</b>                                | <b>PRUSS. ALUM.</b><br><b>22742-AP</b>                                              | <b>MALT GOLD</b><br><b>22742-DM</b>                                                 | <b>PEARL WHITE</b><br><b>22742-BP</b>                                               |

|                                                                                     |                                                                                      |                                                                                      |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br><b>MISTY BRON.</b><br><b>22742-BN</b>                                  | <b>SAMOA BR.</b><br><b>22742-MS</b>                                                  | <b>SATIN WHITE</b><br><b>22742-BS</b>                                                | <b>COSSO AN.*</b><br><b>22742-AC</b>                                                 |

Emergency beacon light



**Removable emergency beacon light**  
**18584**

Emergency lighting for hallways, rooms... in the event of a power failure. The beacon light can be removed to be used as a torch (removal can be prevented by means of a screw, also supplied)  
Power supply 230 V~ 50 ÷ 60 Hz  
Battery autonomy ≈ 3 h  
Battery recharge time ≈ 12 h

Pack of 1

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 10<br><b>WHITE*</b><br><b>18784</b>                                         | <b>BEIGE</b><br><b>18784-A</b>                                                      | <b>ODYSSEY GOLD</b><br><b>18784-OD</b>                                              | <b>CHOCOLATE*</b><br><b>18784-CH</b><br>Pack of 1                                   |



Pack of 10  
**MERC. ALUM.\***  
**18784-MA**

**NEP. STEEL**  
**18784-AN**

Mega / Iris Plus\*

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br><b>FUSION ALUM.</b><br><b>22784-AF</b>                                 | <b>PRUSS. ALUM.</b><br><b>22784-AP</b>                                              | <b>MALT GOLD</b><br><b>22784-DM</b>                                                 | <b>PEARL WHITE</b><br><b>22784-BP</b>                                               |

|                                                                                      |                                                                                      |                                                                                      |                                                                                      |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br><b>MISTY BRON.</b><br><b>22784-BN</b>                                   | <b>SAMOA BR.</b><br><b>22784-MS</b>                                                  | <b>SATIN WHITE</b><br><b>22784-BS</b>                                                | <b>COSSO AN.*</b><br><b>22784-AC</b>                                                 |



TV-FM-R/TV-SAT socket outlets



**TV\_FM socket outlet**  
**Series 2-10**  
**Final outlet**  
**Individual installation**  
(Manufacturer: TELEVÉS)

Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk



**R/TV-SAT socket with 2 outputs**  
**Series 6-12**  
**Series 2-5**  
**Final outlet**  
**Individual installation**  
(Manufacturer: TELEVÉS)

Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|                                      |                         |                                 |                                            |
|--------------------------------------|-------------------------|---------------------------------|--------------------------------------------|
|                                      |                         |                                 |                                            |
| Pack of 20<br>WHITE*<br><b>18330</b> | BEIGE<br><b>18330-A</b> | ODYSSEY GOLD<br><b>18330-OD</b> | CHOCOLATE*<br><b>18330-CH</b><br>Pack of 2 |



Pack of 20  
MERC. ALUM.\*  
**18330-MA**  
NEP. STEEL  
**18330-AN**

Mega / Iris Plus\*

|                                              |                                 |                              |                                |
|----------------------------------------------|---------------------------------|------------------------------|--------------------------------|
|                                              |                                 |                              |                                |
| Pack of 2<br>FUSION ALUM.<br><b>22330-AF</b> | PRUSS. ALUM.<br><b>22330-AP</b> | MALT GOLD<br><b>22330-DM</b> | PEARL WHITE<br><b>22330-BP</b> |

|                                             |                              |                                |                               |
|---------------------------------------------|------------------------------|--------------------------------|-------------------------------|
|                                             |                              |                                |                               |
| Pack of 2<br>MISTY BRON.<br><b>22330-BN</b> | SAMOA BR.<br><b>22330-MS</b> | SATIN WHITE<br><b>22330-BS</b> | COSSO AN.*<br><b>22330-AC</b> |

Iris / Iris Plus\*

|                                      |                         |                                 |                                            |
|--------------------------------------|-------------------------|---------------------------------|--------------------------------------------|
|                                      |                         |                                 |                                            |
| Pack of 20<br>WHITE*<br><b>18320</b> | BEIGE<br><b>18320-A</b> | ODYSSEY GOLD<br><b>18320-OD</b> | CHOCOLATE*<br><b>18320-CH</b><br>Pack of 2 |



Pack of 20  
MERC. ALUM.\*  
**18320-MA**  
NEP. STEEL  
**18320-AN**

Mega / Iris Plus\*

|                                              |                                 |                              |                                |
|----------------------------------------------|---------------------------------|------------------------------|--------------------------------|
|                                              |                                 |                              |                                |
| Pack of 2<br>FUSION ALUM.<br><b>22320-AF</b> | PRUSS. ALUM.<br><b>22320-AP</b> | MALT GOLD<br><b>22320-DM</b> | PEARL WHITE<br><b>22320-BP</b> |

|                                             |                              |                                |                               |
|---------------------------------------------|------------------------------|--------------------------------|-------------------------------|
|                                             |                              |                                |                               |
| Pack of 2<br>MISTY BRON.<br><b>22320-BN</b> | SAMOA BR.<br><b>22320-MS</b> | SATIN WHITE<br><b>22320-BS</b> | COSSO AN.*<br><b>22320-AC</b> |

TV-FM-R/TV-SAT socket outlets




**R/TV-SAT socket with 3 outputs**  
**Individual socket installation**

Pack of 1

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|                                     |                         |                                 |                                            |
|-------------------------------------|-------------------------|---------------------------------|--------------------------------------------|
|                                     |                         |                                 |                                            |
| Pack of 2<br>WHITE*<br><b>18341</b> | BEIGE<br><b>18341-A</b> | ODYSSEY GOLD<br><b>18341-OD</b> | CHOCOLATE*<br><b>18341-CH</b><br>Pack of 2 |



Pack of 2  
MERC. ALUM.\*  
**18341-MA**  
NEP. STEEL  
**18341-AN**

Mega / Iris Plus\*

|                                              |                                 |                              |                                |
|----------------------------------------------|---------------------------------|------------------------------|--------------------------------|
|                                              |                                 |                              |                                |
| Pack of 2<br>FUSION ALUM.<br><b>22341-AF</b> | PRUSS. ALUM.<br><b>22341-AP</b> | MALT GOLD<br><b>22341-DM</b> | PEARL WHITE<br><b>22341-BP</b> |

|                                             |                              |                                |                               |
|---------------------------------------------|------------------------------|--------------------------------|-------------------------------|
|                                             |                              |                                |                               |
| Pack of 2<br>MISTY BRON.<br><b>22341-BN</b> | SAMOA BR.<br><b>22341-MS</b> | SATIN WHITE<br><b>22341-BS</b> | COSSO AN.*<br><b>22341-AC</b> |

RJ type connectivity terminals



**6-way RJ11 female connector telephone jack for BAT in basic telephone networks** 19582  
Screwless terminal

Pack of 10



**8-way female RJ45 connector Cat. 6** 18586  
Tool-free connection by insulation piercing

Pack of 10



**Adapter for 1 RJ45/RJ11 connector (AMP, ITT, etc.)** 19582-1

Pack of 10



**Standard Keystone RJ45 connector** 3186-B  
Cat. 6  
White  
Tool-free terminal

Pack of 25

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*




Pack of 10  
WHITE\*  
**19782**



BEIGE  
**19782-A**



ODYSSEY GOLD  
**19782-OD**



CHOCOLATE\*  
**19782-CH**  
Pack of 2




Pack of 10  
MERC. ALUM.\*  
**19782-MA**



NEP. STEEL  
**19782-AN**

Mega / Iris Plus\*



Pack of 2  
FUSION ALUM.  
**22782-AF**



PRUSS. ALUM.  
**22782-AP**



MALT GOLD  
**22782-DM**



PEARL WHITE  
**22782-BP**




Pack of 2  
MISTY BRON.  
**22782-BN**



SAMOA BR.  
**22782-MS**



SATIN WHITE  
**22782-BS**



COSSO AN.\*  
**22782-AC**

Iris / Iris Plus\*



Pack of 10  
WHITE\*  
**19783**



ODYSSEY GOLD  
**19783-OD**



CHOCOLATE\*  
**19783-CH**  
Pack of 2



Pack of 10  
MERC. ALUM.\*  
**19783-MA**



NEP. STEEL  
**19783-AN**

Mega / Iris Plus\*



Pack of 2  
FUSION ALUM.  
**22883-AF**



PRUSS. ALUM.  
**22883-AP**



MALT GOLD  
**22883-DM**



PEARL WHITE  
**22883-BP**



Pack of 2  
MISTY BRON.  
**22883-BN**



SAMOA BR.  
**22883-MS**



SATIN WHITE  
**22883-BS**



COSSO AN.\*  
**22883-AC**

Covers with labelling field

Covers with labelling field

RJ type connectivity terminals



**Double 8-way RJ45 female connector Cat. 6** 18586-2  
Tool-free connection by insulation piercing

Pack of 1



**Adapter for 2 RJ45/RJ11 connectors (AMP, etc.)** 19682-1

Pack of 10



**Standard Keystone RJ45 connector** 3186-B  
Cat. 6  
White  
Tool-free terminal

Pack of 25

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*



Pack of 10  
WHITE\*  
**19882**



BEIGE  
**19882-A**



ODYSSEY GOLD  
**19882-OD**



CHOCOLATE\*  
**19882-CH**  
Pack of 2



Pack of 10  
MERC. ALUM.\*  
**19882-MA**



NEP. STEEL  
**19882-AN**

Mega / Iris Plus\*



Pack of 2  
FUSION ALUM.  
**22783-AF**



PRUSS. ALUM.  
**22783-AP**



MALT GOLD  
**22783-DM**



PEARL WHITE  
**22783-BP**



Pack of 2  
MISTY BRON.  
**22783-BN**



SAMOA BR.  
**22783-MS**



SATIN WHITE  
**22783-BS**



COSSO AN.\*  
**22783-AC**

Iris / Iris Plus\*



Pack of 10  
WHITE\*  
**19883**



ODYSSEY GOLD  
**19883-OD**



CHOCOLATE\*  
**19883-CH**  
Pack of 2



Pack of 10  
MERC. ALUM.\*  
**19883-MA**



NEP. STEEL  
**19883-AN**

Mega / Iris Plus\*



Pack of 2  
FUSION ALUM.  
**22983-AF**



PRUSS. ALUM.  
**22983-AP**



MALT GOLD  
**22983-DM**



PEARL WHITE  
**22983-BP**



Pack of 2  
MISTY BRON.  
**22983-BN**



SAMOA BR.  
**22983-MS**



SATIN WHITE  
**22983-BS**



COSSO AN.\*  
**22983-AC**

Covers with labelling field

Covers with labelling field

SW/APC fiber optic solutions



**Support for 1 standard RJ Keystone connector** **19582-1**

Pack of 10



**Coupler for SW/APC-type optical fibre connector** **3191**

To be used with adapter 3190 or directly plugged into the RJ cover

Pack of 20






**A Keystone adapter should be used with coupler 3191 in RJ adapters** **3190**

For proper use of this adapter, an increased-depth flush-mounting box is recommended




Pack of 20

Iris / Iris Plus\*

|            |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|            |  |  |  |  |
| Pack of 10 | WHITE*<br><b>19782</b>                                                             | BEIGE<br><b>19782-A</b>                                                             | ODYSSEY GOLD<br><b>19782-OD</b>                                                     | CHOCOLATE*<br><b>19782-CH</b>                                                       |

|            |                                                                                    |                                                                                     |
|------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|            |  |  |
| Pack of 10 | MERC. ALUM.*<br><b>19782-MA</b>                                                    | NEP. STEEL<br><b>19782-AN</b>                                                       |

Mega / Iris Plus\*

|           |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|-----------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|           |  |  |  |  |
| Pack of 2 | FUSION ALUM.<br><b>22782-AF</b>                                                    | PRUSS. ALUM.<br><b>22782-AP</b>                                                     | MALT GOLD<br><b>22782-DM</b>                                                        | PEARL WHITE<br><b>22782-BP</b>                                                      |

|           |                                                                                     |                                                                                      |                                                                                      |                                                                                      |
|-----------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|           |  |  |  |  |
| Pack of 2 | MISTY BRON.<br><b>22782-BN</b>                                                      | SAMOA BR.<br><b>22782-MS</b>                                                         | SATIN WHITE<br><b>22782-BS</b>                                                       | COSSO AN.*<br><b>22782-AC</b>                                                        |

Iris / Iris Plus\*

Covers with labelling field



|            |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|            |  |  |  |  |
| Pack of 10 | WHITE*<br><b>19783</b>                                                               | BEIGE<br><b>19783-A</b>                                                               | ODYSSEY GOLD<br><b>19783-OD</b>                                                       | CHOCOLATE*<br><b>19783-CH</b>                                                         |


|            |                                                                                      |                                                                                       |
|------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|            |  |  |
| Pack of 10 | MERC. ALUM.*<br><b>19783-MA</b>                                                      | NEP. STEEL<br><b>19783-AN</b>                                                         |

\*The colours of the Iris Plus frames match those marked with an asterisk

Mega / Iris Plus\*

Covers with labelling field

|           |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|-----------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|           |  |  |  |  |
| Pack of 2 | FUSION ALUM.<br><b>22883-AF</b>                                                      | PRUSS. ALUM.<br><b>22883-AP</b>                                                       | MALT GOLD<br><b>22883-DM</b>                                                          | PEARL WHITE<br><b>22883-BP</b>                                                        |

|           |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|-----------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|           |  |  |  |  |
| Pack of 2 | MISTY BRON.<br><b>22883-BN</b>                                                       | SAMOA BR.<br><b>22883-MS</b>                                                          | SATIN WHITE<br><b>22883-BS</b>                                                        | COSSO AN.*<br><b>22883-AC</b>                                                         |

SW/APC fiber optic solutions



**Support for 2 standard RJ Keystone connectors** **19682-1**

Pack of 10



**Coupler for SW/APC-type optical fibre connector** **3191**

To be used with adapter 3190 or directly plugged into the RJ cover

Pack of 20




**A Keystone adapter should be used with coupler 3191 in RJ adapters** **3190**

For proper use of this adapter, an increased-depth flush-mounting box is recommended

Pack of 20

Iris / Iris Plus\*

|            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|            |  |  |  |  |
| Pack of 10 | WHITE*<br><b>19882</b>                                                              | BEIGE<br><b>19882-A</b>                                                             | ODYSSEY GOLD<br><b>19882-OD</b>                                                     | CHOCOLATE*<br><b>19882-CH</b>                                                       |

|            |                                                                                     |                                                                                     |
|------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|            |  |  |
| Pack of 10 | MERC. ALUM.*<br><b>19882-MA</b>                                                     | NEP. STEEL<br><b>19882-AN</b>                                                       |

Mega / Iris Plus\*

|           |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|           |  |  |  |  |
| Pack of 2 | FUSION ALUM.<br><b>22783-AF</b>                                                     | PRUSS. ALUM.<br><b>22783-AP</b>                                                     | MALT GOLD<br><b>22783-DM</b>                                                        | PEARL WHITE<br><b>22783-BP</b>                                                      |

|           |                                                                                      |                                                                                      |                                                                                      |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|           |  |  |  |  |
| Pack of 2 | MISTY BRON.<br><b>22783-BN</b>                                                       | SAMOA BR.<br><b>22783-MS</b>                                                         | SATIN WHITE<br><b>22783-BS</b>                                                       | COSSO AN.*<br><b>22783-AC</b>                                                        |

Iris / Iris Plus\*

Covers with labelling field

|            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|            |  |  |  |  |
| Pack of 10 | WHITE*<br><b>19883</b>                                                                | BEIGE<br><b>19883-A</b>                                                               | ODYSSEY GOLD<br><b>19883-OD</b>                                                       | CHOCOLATE*<br><b>19883-CH</b>                                                         |

|            |                                                                                       |                                                                                       |
|------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|            |  |  |
| Pack of 10 | MERC. ALUM.*<br><b>19883-MA</b>                                                       | NEP. STEEL<br><b>19883-AN</b>                                                         |

\*The colours of the Iris Plus frames match those marked with an asterisk

Mega / Iris Plus\*

Covers with labelling field

|           |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|-----------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|           |  |  |  |  |
| Pack of 2 | FUSION ALUM.<br><b>22983-AF</b>                                                       | PRUSS. ALUM.<br><b>22983-AP</b>                                                       | MALT GOLD<br><b>22983-DM</b>                                                          | PEARL WHITE<br><b>22983-BP</b>                                                        |

|           |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|-----------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|           |  |  |  |  |
| Pack of 2 | MISTY BRON.<br><b>22983-BN</b>                                                        | SAMOA BR.<br><b>22983-MS</b>                                                          | SATIN WHITE<br><b>22983-BS</b>                                                        | COSSO AN.*<br><b>22983-AC</b>                                                         |




Multiple connector


Multiple adapter for computer connectors  
with labelling field  
Supplied with 5 adapters for different connectors

\*The colours of the Iris Plus frames match those  
marked with an asterisk

Supplied with adapters



Connector SUB-D 9 pins    Connector SUB-D 15 pins    Connector Blank



Support RJ45 connector    Connector Twinaxial

Iris / Iris Plus\*



Pack of 10    WHITE\* 18049    ODYSSEY GOLD 18049-OD    CHOCOLATE\* 18049-CH  
Pack of 1



Pack of 10    MERC. ALUM.\* 18049-MA    NEP. STEEL 18049-AN

Mega / Iris Plus\*



Pack of 1    FUSION ALUM. 22049-AF    PRUSS. ALUM. 22049-AP    MALT GOLD 22049-DM    PEARL WHITE 22049-BP



Pack of 1    MISTY BRON. 22049-BN    SAMOA BR. 22049-MS    SATIN WHITE 22049-BS    COSSO AN.\* 22049-AC

Wound potentiometer for loudspeakers



Potentiometer 3 W - 27  $\Omega$  18560  
Potentiometer 5 W - 47  $\Omega$  18562  
\*Potentiometer 5 + 5 W - 47  $\Omega$  18564

\*Requires a special depth  
flush-mounting box

Not suitable for claws

Pack of 1

\*The colours of the Iris Plus frames match those  
marked with an asterisk

Iris / Iris Plus\*



Pack of 10    WHITE\* 18760    ODYSSEY GOLD 18760-OD    CHOCOLATE\* 18760-CH  
Pack of 1



Pack of 10    MERC. ALUM.\* 18760-MA    NEP. STEEL 18760-AN    COSSO AN.\* 22760-AC

Loudspeaker socket outlets



**Loudspeaker socket outlet (mono)** **18563-2**  
Rear screwed terminals  
  
Pack of 10



**Loudspeaker socket outlet (stereo)** **18563-4**  
Rear screwed terminals  
  
Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 10<br>WHITE*<br><b>18730</b>                                               | BEIGE<br><b>18730-A</b>                                                             | ODYSSEY GOLD<br><b>18730-OD</b>                                                     | CHOCOLATE*<br><b>18730-CH</b><br>Pack of 1                                          |



Pack of 10  
MERC. ALUM.\*  
**18730-MA**  
NEP. STEEL  
**18730-AN**

Mega / Iris Plus\*

|                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>FUSION ALUM.<br><b>22730-AF</b>                                       | PRUSS. ALUM.<br><b>22730-AP</b>                                                     | MALT GOLD<br><b>22730-DM</b>                                                        | PEARL WHITE<br><b>22730-BP</b>                                                      |

|                                                                                     |                                                                                      |                                                                                      |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>MISTY BRON.<br><b>22730-BN</b>                                         | SAMOA BR.<br><b>22730-MS</b>                                                         | SATIN WHITE<br><b>22730-BS</b>                                                       | COSSO AN.*<br><b>22730-AC</b>                                                        |


Loudspeaker socket outlets



**RCA mono socket outlet** **18575**  
Rear screwless terminal.  
Cable: maximum 3 pairs of 0.3 mm²  
  
Pack of 1

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*



|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 10<br>WHITE*<br><b>18882</b>                                                 | BEIGE<br><b>18882-A</b>                                                               | ODYSSEY GOLD<br><b>18882-OD</b>                                                       | CHOCOLATE*<br><b>18882-CH</b><br>Pack of 1                                            |



Pack of 10  
MERC. ALUM.\*  
**18882-MA**  
NEP. STEEL  
**18882-AN**

Mega / Iris Plus\*

|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>FUSION ALUM.<br><b>22882-AF</b>                                         | PRUSS. ALUM.<br><b>22882-AP</b>                                                       | MALT GOLD<br><b>22882-DM</b>                                                          | PEARL WHITE<br><b>22882-BP</b>                                                        |

|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>MISTY BRON.<br><b>22882-BN</b>                                          | SAMOA BR.<br><b>22882-MS</b>                                                          | SATIN WHITE<br><b>22882-BS</b>                                                        | COSSO AN.*<br><b>22882-AC</b>                                                         |

Loudspeaker socket outlets



**RCA stereo socket outlet** **18576**  
Rear screwless terminal.  
Cable: maximum 3 pairs of 0.3 mm²  
  
Pack of 1

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| Pack of 10<br>WHITE*<br><b>18776</b>                                                | ODYSSEY GOLD<br><b>18776-OD</b>                                                     | CHOCOLATE*<br><b>18776-CH</b><br>Pack of 1                                          |



Pack of 10  
MERC. ALUM.\*  
**18776-MA**  
NEP. STEEL  
**18776-AN**

Mega / Iris Plus\*

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>FUSION ALUM.<br><b>22776-AF</b>                                        | PRUSS. ALUM.<br><b>22776-AP</b>                                                     | MALT GOLD<br><b>22776-DM</b>                                                        | PEARL WHITE<br><b>22776-BP</b>                                                      |

|                                                                                      |                                                                                      |                                                                                      |                                                                                      |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>MISTY BRON.<br><b>22776-BN</b>                                          | SAMOA BR.<br><b>22776-MS</b>                                                         | SATIN WHITE<br><b>22776-BS</b>                                                       | COSSO AN.*<br><b>22776-AC</b>                                                        |



**RCA video socket outlet** **18577**  
Rear screwless terminal.  
Cable: maximum 3 pairs of 0.3 mm²  
  
Pack of 1

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 10<br>WHITE*<br><b>18882</b>                                                  | BEIGE<br><b>18882-A</b>                                                               | ODYSSEY GOLD<br><b>18882-OD</b>                                                       | CHOCOLATE*<br><b>18882-CH</b><br>Pack of 1                                            |



Pack of 10  
MERC. ALUM.\*  
**18882-MA**  
NEP. STEEL  
**18882-AN**

Mega / Iris Plus\*

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>FUSION ALUM.<br><b>22882-AF</b>                                          | PRUSS. ALUM.<br><b>22882-AP</b>                                                       | MALT GOLD<br><b>22882-DM</b>                                                          | PEARL WHITE<br><b>22882-BP</b>                                                        |

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>MISTY BRON.<br><b>22882-BN</b>                                           | SAMOA BR.<br><b>22882-MS</b>                                                          | SATIN WHITE<br><b>22882-BS</b>                                                        | COSSO AN.*<br><b>22882-AC</b>                                                         |


Assorted mechanisms





**Fuse holder** **18528**  
Max. fuses 16 A 250 V~  
for ceramic fuse  
8.5×31.5 mm  
  
Pack of 10

\*The colours of the Iris Plus frames match those marked with an asterisk


Iris / Iris Plus\*


|                                                                                    |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| Pack of 10<br>WHITE*<br><b>18728</b>                                               | ODYSSEY GOLD<br><b>18728-OD</b>                                                     | CHOCOLATE*<br><b>18728-CH</b>                                                       |

Pack of 1

|                                                                                    |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |
| Pack of 10<br>MERC. ALUM.*<br><b>18728-MA</b>                                      | NEP. STEEL<br><b>18728-AN</b>                                                       |

Mega / Iris Plus\*

|                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>FUSION ALUM.<br><b>22728-AF</b>                                       | PRUSS. ALUM.<br><b>22728-AP</b>                                                     | MALT GOLD<br><b>22728-DM</b>                                                        | PEARL WHITE<br><b>22728-BP</b>                                                      |

|                                                                                     |                                                                                      |                                                                                      |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>MISTY BRON.<br><b>22728-BN</b>                                         | SAMOA BR.<br><b>22728-MS</b>                                                         | SATIN WHITE<br><b>22728-BS</b>                                                       | COSSO AN.*<br><b>22728-AC</b>                                                        |

**Fuse-holder cap**  
Spare part for product Ref.18528

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|                                                                                      |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |
| Pack of 10<br>WHITE*<br><b>18029</b>                                                 | ODYSSEY GOLD<br><b>18029-OD</b>                                                       | CHOCOLATE*<br><b>18029-CH</b>                                                         |

|                                                                                      |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |
| Pack of 10<br>MERC. ALUM.*<br><b>18029-MA</b>                                        | NEP. STEEL<br><b>18029-AN</b>                                                         |

Mega / Iris Plus\*

|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 10<br>FUSION ALUM.<br><b>22029-AF</b>                                        | PRUSS. ALUM.<br><b>22029-AP</b>                                                       | MALT GOLD<br><b>22029-DM</b>                                                          | PEARL WHITE<br><b>22029-BP</b>                                                        |

|                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 10<br>MISTY BRON.<br><b>22029-BN</b>                                         | SAMOA BR.<br><b>22029-MS</b>                                                          | SATIN WHITE<br><b>22029-BS</b>                                                        | COSSO AN.*<br><b>22029-AC</b>                                                         |

Multimedia connectors



**Type A HDMI connector**  
Screwed terminals  
White  
Beige  
Grey  
  
**18578-HDMI**  
**18578-HDMI-A**  
**18578-HDMI-G**  
  
Pack of 1

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>WHITE*<br><b>18778</b>                                                 | BEIGE<br><b>18778-A</b>                                                             | ODYSSEY GOLD<br><b>18778-OD</b>                                                     | CHOCOLATE*<br><b>18778-CH</b>                                                       |

|                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |
| Pack of 1<br>MERC. ALUM.*<br><b>18778-MA</b>                                        | NEP. STEEL<br><b>18778-AN</b>                                                       |

Mega / Iris Plus\*

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>FUSION ALUM.<br><b>22778-AF</b>                                        | PRUSS. ALUM.<br><b>22778-AP</b>                                                     | MALT GOLD<br><b>22778-DM</b>                                                        | PEARL WHITE<br><b>22778-BP</b>                                                      |

|                                                                                      |                                                                                      |                                                                                      |                                                                                      |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |  |  |
| Pack of 1<br>MISTY BRON.<br><b>22778-BN</b>                                          | SAMOA BR.<br><b>22778-MS</b>                                                         | SATIN WHITE<br><b>22778-BS</b>                                                       | COSSO AN.*<br><b>22778-AC</b>                                                        |



Iris, Iris Plus and Mega

BJC

Assorted mechanisms

Blank cover

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

  
Pack of 10  
WHITE\*  
**18033**

  
BEIGE  
**18033-A**

  
ODYSSEY GOLD  
**18033-OD**

  
CHOCOLATE\*  
**18033-CH**  
Pack of 1

  
Pack of 10  
MERC. ALUM.\*  
**18033-MA**

  
NEP. STEEL  
**18033-AN**

Mega / Iris Plus\*

  
Pack of 1  
FUSION ALUM.  
**22033-AF**

  
PRUSS. ALUM.  
**22033-AP**

  
MALT GOLD  
**22033-DM**

  
PEARL WHITE  
**22033-BP**

  
Pack of 1  
MISTY BRON.  
**22033-BN**

  
SAMOA BR.  
**22033-MS**

  
SATIN WHITE  
**22033-BS**

  
COSSO AN.\*  
**22033-AC**

Room thermostats



**Electronic thermostat for heating or cooling** **18544**  
230 V~/1900 W cos φ = 1  
230 V~/450 W cos φ = 0.6  
Regulation from 5 °C a 30 °C  
Hysteresis ±1 °C

Pack of 1

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

  
Pack of 1  
WHITE\*  
**18744**

  
ODYSSEY GOLD  
**18744-OD**

  
CHOCOLATE\*  
**18744-CH**  
Pack of 1

  
Pack of 1  
MERC. ALUM.\*  
**18744-MA**

  
NEP. STEEL  
**18744-AN**

Mega / Iris Plus\*

  
Pack of 1  
FUSION ALUM.  
**22744-AF**

  
PRUSS. ALUM.  
**22744-AP**

  
MALT GOLD  
**22744-DM**

  
PEARL WHITE  
**22744-BP**

  
Pack of 1  
MISTY BRON.  
**22744-BN**

  
SAMOA BR.  
**22744-MS**

  
SATIN WHITE  
**22744-BS**

  
COSSO AN.\*  
**22744-AC**

Room thermostats

**Heating and cooling room thermostat with a one-way switch; 5 A (2 A) 230 V~ regulation from 5 to 30 °C**  
Night-time reduction: The thermostat incorporates a second resistor which can be turned on at a scheduled time via a timer switch, achieving a temperature reduction of 5°C

Pack of 1

**Heated floor thermostat**  
Control of floor temperature in facilities with heated floor heating. Night reduction via a signal from an external programmer. "Heating connected" and "reduced operation" indicator light. On/off one-way switch. For installation in a 60mm mechanism box. Indicator lights  
Temperature: \*.5 [= 10..50 °C]  
Power supply: 230 VAc [195..253 V] 50 Hz  
Remote sensor: length 4 m [extendable to 50 m]  
Room temperature 0..40 °C  
Hysteresis ±1°

Pack of 1

Iris

  
WHITE  
**18144**

  
WHITE  
**18244**

Motion detector



**Spherical motion detector, 3-wire mechanism** **18555-3**  
Contact rating (3-wire, relay output):  
Resistive load 2,300 W, 10 A max., cos φ = 1  
Inductive load 1,500 W, 5 A max., cos φ = 0.6  
Halogen lamps with a 1000 VA transformer  
Electronic ballasts e.g. 2 x 36 W (20 max)  
Compatible with LED loads

Pack of 1

**Spherical motion detector** **18555**  
Not suitable for claws  
Detection angle: 180° horizontal/60° vertical  
Timing from 4 sec. to 10 min.  
Power supply 230 V +6 % -10 %  
Range (1.2-2.2 m mounting height), max. 8 m for lateral movement, approx. 3 m for forward movement. Twilight level of 5 to 1000 lux  
Contact rating (2-wire, triac output): incandescent/ halogen 40 - 300 W max.  
Minimum load 40 W

Pack of 1

\*The colours of the Iris Plus frames match those marked with an asterisk

Iris / Iris Plus\*

  
Pack of 10  
WHITE\*  
**18730**

  
BEIGE  
**18730-A**

  
ODYSSEY GOLD  
**18730-OD**

  
CHOCOLATE\*  
**18730-CH**  
Pack of 1

  
Pack of 10  
MERC. ALUM.\*  
**18730-MA**

  
NEP. STEEL  
**18730-AN**

Mega / Iris Plus\*

  
Pack of 1  
FUSION ALUM.  
**22730-AF**

  
PRUSS. ALUM.  
**22730-AP**

  
MALT GOLD  
**22730-DM**

  
PEARL WHITE  
**22730-BP**

  
Pack of 1  
MISTY BRON.  
**22730-BN**

  
SAMOA BR.  
**22730-MS**

  
SATIN WHITE  
**22730-BS**

  
COSSO AN.\*  
**22730-AC**

Sound modules

Adapter for sound modules  
(Sonelco, Eis, Tez, Sonbel)

A specific fixing frame must be added,  
depending on the manufacturer

46 x 46 mm

\*The colours of the Iris Plus frames match those  
marked with an asterisk

Iris / Iris Plus\*



Pack of 10  
**WHITE\***  
**18742**



**ODYSSEY GOLD**  
**18742-OD**



**CHOCOLATE\***  
**18742-CH**  
Pack of 1



Pack of 10  
**MERC. ALUM.\***  
**18742-MA**



**NEP. STEEL**  
**18742-AN**

Mega / Iris Plus\*



Pack of 1  
**FUSION ALUM.**  
**22742-AF**



**PRUSS. ALUM.**  
**22742-AP**



**MALT GOLD**  
**22742-DM**



**PEARL WHITE**  
**22742-BP**



Pack of 1  
**MISTY BRON.**  
**22742-BN**



**SAMOA BR.**  
**22742-MS**



**SATIN WHITE**  
**22742-BS**



**COSSO AN.\***  
**22742-AC**

Adapter for EGI sound modules

Adapts directly to the sound module  
fixing frames

41 x 41 mm

\*The colours of the Iris Plus frames match those  
marked with an asterisk

Iris / Iris Plus\*



Pack of 10  
**WHITE\***  
**18743**



**BEIGE**  
**18743-A**



**ODYSSEY GOLD**  
**18743-OD**



**CHOCOLATE\***  
**18743-CH**  
Pack of 1



Pack of 10  
**MERC. ALUM.\***  
**18743-MA**



**NEP. STEEL**  
**18743-AN**

Mega / Iris Plus\*



Pack of 1  
**FUSION ALUM.**  
**22743-AF**



**PRUSS. ALUM.**  
**22743-AP**



**MALT GOLD**  
**22743-DM**



**PEARL WHITE**  
**22743-BP**



Pack of 1  
**MISTY BRON.**  
**22743-BN**



**SAMOA BR.**  
**22743-MS**



**SATIN WHITE**  
**22743-BS**



**COSSO AN.\***  
**22743-AC**

Assorted material



**Universal linking mechanism**    **2373-I**  
Thermoplastic material  
Dimensions: 71x71x43 mm  
  
Pack of 640



**Protective cover**    **2374-I**  
Allows you to locate  
the box after plastering  
  
Pack of 1000



**Claws for metal frames**    **16-GAR**  
Bag with 50 claws and  
50 screws to assemble  
25 fixing frames



**1-gang flush-mounting box for hollow partition walls**    **2341**  
  
Pack of 120



**2-gang flush-mounting box for hollow partition walls**    **2342**  
  
Pack of 60



**3-gang flush-mounting box for hollow partition walls**    **2343**  
  
Pack of 35



**4-gang flush-mounting box for hollow partition walls**    **2344**  
  
Pack of 30



**5-gang flush-mounting box for hollow partition walls**    **2345**  
  
Pack of 21



**Hole saw with countersink for hollow partition walls**    **2158000**  
diam. 68 mm / depth. 40 mm  
  
Pack of 1



**Countersink for Ø 68 mm**    **5892000**  
Tool for flush installation  
of hollow wall boxes  
  
Pack of 1



**Replacement blades for ref. 5892000**    **5893000**  
  
Pack of 1



**BJC fixing frame aligner**    **3201**  
  
Pack of 1

**Note:** Check the price list published on our website, [www.bjc.es](http://www.bjc.es), for availability of mechanisms with claws identified with -X after the reference.  
To achieve the designed installation results, the use of these boxes and a hole saw with countersink is recommended.

Iris Frames



| WHITE | Pack of |
|-------|---------|
| 18001 | 10      |
| 18002 | 10      |
| 18003 | 5       |
| 18004 | 5       |
| 18005 | 1       |
| 18102 | 10      |
| 18103 | 5       |
| 18104 | 5       |



| BEIGE   | Pack of |
|---------|---------|
| 18001-A | 10      |
| 18002-A | 10      |
| 18003-A | 5       |
| 18004-A | 5       |
| 18005-A | 1       |
| 18102-A | 10      |
| 18103-A | 5       |
| 18104-A | 5       |



| ODYSSEY GOLD | Pack of |
|--------------|---------|
| 18001-OD     | 10      |
| 18002-OD     | 10      |
| 18003-OD     | 5       |
| 18004-OD     | 5       |
| 18005-OD     | 1       |
| 18102-OD     | 10      |
| 18103-OD     | 5       |
| 18104-OD     | 5       |



| NEPTUNE STEEL | Pack of |
|---------------|---------|
| 18001-AN      | 10      |
| 18002-AN      | 10      |
| 18003-AN      | 5       |
| 18004-AN      | 5       |
| 18005-AN      | 1       |
| 18102-AN      | 10      |
| 18103-AN      | 5       |
| 18104-AN      | 5       |




| MERCURY ALUMINIUM | Pack of |
|-------------------|---------|
| 18001-MA          | 10      |
| 18002-MA          | 10      |
| 18003-MA          | 5       |
| 18004-MA          | 5       |
| 18005-MA          | 1       |
| 18102-MA          | 10      |
| 18103-MA          | 5       |
| 18104-MA          | 5       |



| CEMENT BEIGE | Pack of |
|--------------|---------|
| 18001-BC     | 1       |
| 18002-BC     | 1       |
| 18003-BC     | 1       |
| 18004-BC     | 1       |
| 18005-BC     | 1       |
| 18102-BC     | 1       |
| 18103-BC     | 1       |
| 18104-BC     | 1       |



| CHOCOLATE | Pack of |
|-----------|---------|
| 18001-CH  | 1       |
| 18002-CH  | 1       |
| 18003-CH  | 1       |
| 18004-CH  | 1       |
| 18005-CH  | 1       |
| 18102-CH  | 1       |
| 18103-CH  | 1       |
| 18104-CH  | 1       |

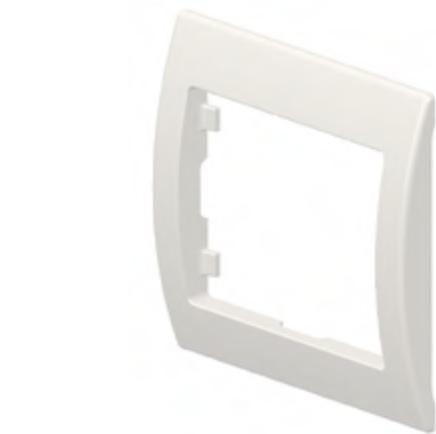

| MEASUREMENTS |             |
|--------------|-------------|
|              | 85 x 84 mm  |
|              | 85 x 155 mm |
|              | 85 x 226 mm |
|              | 85 x 298 mm |
|              | 85 x 370 mm |
|              | 156 x 84 mm |
|              | 228 x 84 mm |
|              | 299 x 84 mm |

Iris Plus frames



| WHITE | Pack of |
|-------|---------|
| 18011 | 10      |
| 18012 | 10      |
| 18013 | 5       |
| 18014 | 5       |
| 18112 | 10      |
| 18113 | 5       |



| MERCURY ALUMINIUM | Pack of |
|-------------------|---------|
| 18011-MA          | 10      |
| 18012-MA          | 10      |
| 18013-MA          | 5       |
| 18014-MA          | 5       |
| 18112-MA          | 10      |
| 18113-MA          | 5       |




| COSSO ANTHRACITE | Pack of |
|------------------|---------|
| 18011-AC         | 1       |
| 18012-AC         | 1       |
| 18013-AC         | 1       |
| 18014-AC         | 1       |
| 18112-AC         | 1       |
| 18113-AC         | 1       |



| CHOCOLATE | Pack of |
|-----------|---------|
| 18011-CH  | 1       |
| 18012-CH  | 1       |
| 18013-CH  | 1       |
| 18014-CH  | 1       |
| 18112-CH  | 1       |
| 18113-CH  | 1       |

To install Iris Plus frames correctly in hollow partition walls, use the 2158000 hole saw (or equivalent) to ensure the flush-mounting box is flush with the wall.

| MEASUREMENTS |             |
|--------------|-------------|
|              | 93 x 82 mm  |
|              | 164 x 82 mm |
|              | 236 x 82 mm |
|              | 307 x 82 mm |
|              | 153 x 93 mm |
|              | 225 x 93 mm |

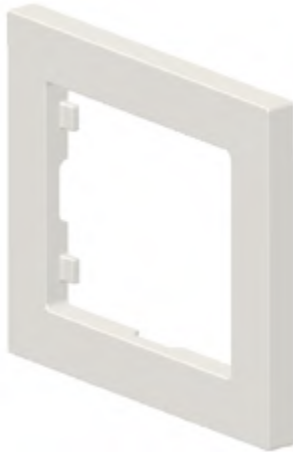



Iris, Iris Plus and Mega

BJC

Mega Frames



SATIN WHITE

Pack of

|                                                                                   |          |   |
|-----------------------------------------------------------------------------------|----------|---|
|  | 22001-BS | 1 |
|  | 22002-BS | 1 |
|  | 22003-BS | 1 |
|  | 22004-BS | 1 |
|  | 22102-BS | 1 |
|  | 22103-BS | 1 |
|  | 22104-BS | 1 |



MABE PEARL WHITE

Pack of

|                                                                                   |          |   |
|-----------------------------------------------------------------------------------|----------|---|
|  | 22001-BP | 1 |
|  | 22002-BP | 1 |
|  | 22003-BP | 1 |
|  | 22004-BP | 1 |
|  | 22102-BP | 1 |
|  | 22103-BP | 1 |
|  | 22104-BP | 1 |



MABE PEARL WHITE COSSO

Pack of

|                                                                                   |           |   |
|-----------------------------------------------------------------------------------|-----------|---|
|  | 22001-BPC | 1 |
|  | 22002-BPC | 1 |
|  | 22003-BPC | 1 |
|  | 22004-BPC | 1 |
|  | 22102-BPC | 1 |
|  | 22103-BPC | 1 |
|  | 22104-BPC | 1 |



SAMOA BR.

Pack of

|                                                                                     |          |   |
|-------------------------------------------------------------------------------------|----------|---|
|  | 22001-MS | 1 |
|  | 22002-MS | 1 |
|  | 22003-MS | 1 |
|  | 22004-MS | 1 |
|  | 22102-MS | 1 |
|  | 22103-MS | 1 |
|  | 22104-MS | 1 |



FUSION ALUM.

Pack of

|                                                                                     |          |   |
|-------------------------------------------------------------------------------------|----------|---|
|  | 22001-AF | 1 |
|  | 22002-AF | 1 |
|  | 22003-AF | 1 |
|  | 22004-AF | 1 |
|  | 22102-AF | 1 |
|  | 22103-AF | 1 |
|  | 22104-AF | 1 |



FUSION ALUMINIUM COSSO

Pack of

|                                                                                     |           |   |
|-------------------------------------------------------------------------------------|-----------|---|
|  | 22001-AFC | 1 |
|  | 22002-AFC | 1 |
|  | 22003-AFC | 1 |
|  | 22004-AFC | 1 |
|  | 22102-AFC | 1 |
|  | 22103-AFC | 1 |
|  | 22104-AFC | 1 |



PRUSS. ALUM.

Pack of

|                                                                                     |          |   |
|-------------------------------------------------------------------------------------|----------|---|
|  | 22001-AP | 1 |
|  | 22002-AP | 1 |
|  | 22003-AP | 1 |
|  | 22004-AP | 1 |
|  | 22102-AP | 1 |
|  | 22103-AP | 1 |
|  | 22104-AP | 1 |



MALT GOLD

Pack of

|                                                                                     |          |   |
|-------------------------------------------------------------------------------------|----------|---|
|  | 22001-DM | 1 |
|  | 22002-DM | 1 |
|  | 22003-DM | 1 |
|  | 22004-DM | 1 |
|  | 22102-DM | 1 |
|  | 22103-DM | 1 |
|  | 22104-DM | 1 |



MALT GOLD COSSO

Pack of

|                                                                                     |           |   |
|-------------------------------------------------------------------------------------|-----------|---|
|  | 22001-DMC | 1 |
|  | 22002-DMC | 1 |
|  | 22003-DMC | 1 |
|  | 22004-DMC | 1 |
|  | 22102-DMC | 1 |
|  | 22103-DMC | 1 |
|  | 22104-DMC | 1 |



MISTY BRON.

Pack of

|                                                                                     |          |   |
|-------------------------------------------------------------------------------------|----------|---|
|  | 22001-BN | 1 |
|  | 22002-BN | 1 |
|  | 22003-BN | 1 |
|  | 22004-BN | 1 |
|  | 22102-BN | 1 |
|  | 22103-BN | 1 |
|  | 22104-BN | 1 |



MISTY BRONZE COSSO

Pack of

|                                                                                       |           |   |
|---------------------------------------------------------------------------------------|-----------|---|
|  | 22001-BNC | 1 |
|  | 22002-BNC | 1 |
|  | 22003-BNC | 1 |
|  | 22004-BNC | 1 |
|  | 22102-BNC | 1 |
|  | 22103-BNC | 1 |
|  | 22104-BNC | 1 |

Mega Frames

Pure metal



ALUMINIUM

Pack of

|                                                                                     |          |   |
|-------------------------------------------------------------------------------------|----------|---|
|  | 22001-AG | 1 |
|  | 22002-AG | 1 |
|  | 22003-AG | 1 |
|  | 22004-AG | 1 |
|  | 22102-AG | 1 |
|  | 22103-AG | 1 |
|  | 22104-AG | 1 |



GOLD

Pack of

|                                                                                     |          |   |
|-------------------------------------------------------------------------------------|----------|---|
|  | 22001-DG | 1 |
|  | 22002-DG | 1 |
|  | 22003-DG | 1 |
|  | 22004-DG | 1 |
|  | 22102-DG | 1 |
|  | 22103-DG | 1 |
|  | 22104-DG | 1 |

Textured metal



COSSO EBONY BLACK

Pack of

|                                                                                       |           |   |
|---------------------------------------------------------------------------------------|-----------|---|
|  | 22001-NEC | 1 |
|  | 22002-NEC | 1 |
|  | 22003-NEC | 1 |
|  | 22004-NEC | 1 |
|  | 22102-NEC | 1 |
|  | 22103-NEC | 1 |
|  | 22104-NEC | 1 |



MOCHA BROWN COSSO

Pack of

|                                                                                       |           |   |
|---------------------------------------------------------------------------------------|-----------|---|
|  | 22001-MMC | 1 |
|  | 22002-MMC | 1 |
|  | 22003-MMC | 1 |
|  | 22004-MMC | 1 |
|  | 22102-MMC | 1 |
|  | 22103-MMC | 1 |
|  | 22104-MMC | 1 |

MEASUREMENTS



90 x 90 mm



161 x 90 mm



232.5 x 90 mm



304 x 90 mm



90 x 161 mm



90 x 232.5 mm





90 x 304 mm

# Antibacterial solutions




Thanks to their antibacterial finish, Iris and Iris Plus impede the survival and transmission of microorganisms. This makes them the perfect choice for environments in which microorganisms thrive and the risk of transmission is high, such as hospitals, care homes, residential homes, care centres and communal areas in offices or homeowners' associations.

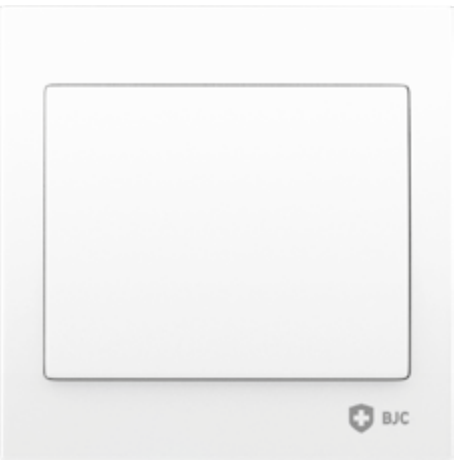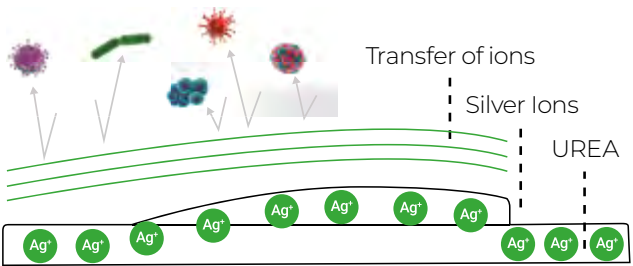

Antibacterial Iris



Antibacterial Iris Plus



## Durability

The antibacterial agent is not applied with a coating, but is part of the material of the product itself. For this reason, the antibacterial properties do not wear off over time. Although the material wears away, silver ions are still present inside the product. The antibacterial finish is white in colour to indeed offer antibacterial properties.




## Certification

The antibacterial agent used has been registered in the U.S: FDA (Food and Drug Administration) and EPA (Environmental Protection Agency) and included as a biocidal substance in the EUBPR (European Biocides Regulation). The material used for this finish has been certified according to the ISO 22196 standards.




## Common areas

Ideal product for installation in places where hygiene is a key factor, such as hospitals, residential care homes or welfare centres and in high-traffic areas such as restaurants, offices or residents' associations. All of them are places in which it is important to have control of factors that have polluting effects, as well as guarantee greater safety for residents, workers, customers and visitors.



## The antibacterial agent

The antibacterial agent is not applied with a coating, but is part of the material of the product itself. For this reason, the antibacterial properties do not wear off over time. Although the material wears away, silver ions are still present inside the product. The antibacterial finish is white in colour to indeed offer antibacterial properties.



## Main functions

An antibacterial finish has been developed for a wide range of the most common functions in the spaces where they are to be installed: broad and double switches, Schuko socket, RJ45 connector, switches for blinds, TV, key card switches and cord pulls.



## Features

Antibacterial Urea maintains the excellent physical and chemical properties of Urea, such as thermal insulation, fire behaviour, chemical resistance, colour stability, etc. The main characteristics of Urea are detailed on the following pages. The dimensions of the parts with antibacterial finish are the same as the standard finish, so it is possible to exchange the installed parts for the new finish. Visually, there is not much change either, so a special logo has been added to the frame to be able to differentiate the antibacterial product.

# Antibacterial solutions




## Switch mechanisms



**Single pole one-way switch** 18505  
**Two-way switch** 18506  
16 A 250 V~  
**Intermediate switch** 18507  
10 A 250 V~  
Pack of 10

### Antibacterial switch



Pack of 1 WHITE  
**18705-BF**

## Switch mechanisms



**Double one-way switch** 18509  
**Double two-way switch** 18510  
16 A 250 V~  
**Double push-button** 18511  
10 A 250 V~  
**Double normally-closed push-button** 18513  
10 A 250 V~  
Pack of 10

### Antibacterial double switch



Pack of 1 WHITE  
**18709-BF**

## Push-button mechanism



**Push-button** 18516  
**Normally-closed push-button** 18512  
10 A 250 V~  
Pack of 10

### Antibacterial switch with bell symbol



Pack of 1 WHITE  
**18716-BF**

### Antibacterial switch with bulb symbol




Pack of 1 WHITE  
**18717-BF**

## Mechanisms for blinds



**Double push-button for blinds with electrical interlocking device** 18565  
**Double one-way switch for blinds** 18569  
With electrical and mechanical interlocking device  
10 A 250 V~  
Pack of 10  
  
**Double push-button for blinds** 18511  
Requires auxiliary device specific to each blind manufacturer  
No interlocking device  
10 A 250 V~  
Pack of 10

### Antibacterial double switch for blinds



Pack of 1 WHITE  
**18765-BF**

# Iris, Iris Plus

## Cord operated push-button mechanism



**Cord operated push-button** 18521  
**Cord operated two-way switch** 18598  
10 A 250 V~  
Not suitable for claws  
Pack of 10

The cord operated mechanism does not have an antibacterial finish

### Antibacterial cord operated cover



Pack of 1 WHITE  
**18734-BF**

## Socket outlets with safety protection



**Schuko® socket outlet (lateral earthing) with safety protection** 18524  
Screwed terminals 16 A 250 V~

Pack of 10

### Antibacterial cover



Pack of 1 WHITE  
**18724-BF**

## Voice and data connectors



**Adapter for 1 RJ45/RJ11 connector (AMP, ITT, etc.)** 19582-1  
Pack of 10

### Antibacterial voice and data connector cover



Pack of 1 WHITE  
**19782-BF**

## TV-FM socket outlet



**TV\_FM socket outlet Series 2-10** 2932  
**Final outlet Individual installation** 2933  
(Manufacturer: TELEVÉS) 2934

Pack of 10

TV-FM socket outlets comply with UNE 20523 and CEI 16 standards

### Antibacterial TV-FM cover



Pack of 1 WHITE  
**18330-BF**





Key card mechanism

**One-way / two-way switch for a key card with 1 built-in microswitch and indicator light**  
With built-in lamp  
250VAC - 10A resistive load / 1.5A inductive load

The use of a contactor for inductive loads is recommended

This product's display does not have an antibacterial finish.



Pack of 1 WHITE  
**18068-BF**

**Microswitch for key card switch**  
Allows you to replace or add a microswitch to a 18068-\* key card switch

**2368**

Pack of 10



Iris, Iris Plus

Antibacterial frames

Iris



| WHITE           | Pack of |
|-----------------|---------|
| <b>18001-BF</b> | 1       |
| <b>18002-BF</b> | 1       |
| <b>18003-BF</b> | 1       |
| <b>18004-BF</b> | 1       |
| <b>18102-BF</b> | 1       |

MEASUREMENTS

|  |                    |
|--|--------------------|
|  | <b>85 x 84 mm</b>  |
|  | <b>85 x 155 mm</b> |
|  | <b>85 x 226 mm</b> |
|  | <b>85 x 298 mm</b> |
|  | <b>156 x 84 mm</b> |

Iris Plus



| WHITE           | Pack of |
|-----------------|---------|
| <b>18011-BF</b> | 1       |
| <b>18012-BF</b> | 1       |
| <b>18013-BF</b> | 1       |
| <b>18014-BF</b> | 1       |
| <b>18112-BF</b> | 1       |

MEASUREMENTS

|  |                    |
|--|--------------------|
|  | <b>93 x 82 mm</b>  |
|  | <b>164 x 82 mm</b> |
|  | <b>236 x 82 mm</b> |
|  | <b>307 x 82 mm</b> |
|  | <b>153 x 93 mm</b> |

The material of the components is treated with an antibacterial agent. It is not a superficial treatment.

# BJC Style

## Unmistakeable and elegant

The Style series is the modern archetype of the traditional series, both in terms of aesthetics and functionality, which transcend fashion trends. With regards to its appearance, many aspects of the Style series have remained unchanged, making its functional version one of the most recognised and recognisable on the market.

New collection of one-way switches and mechanisms: design, elegance and technology for homes, offices and hotels.



**Polar  
White**



**Platinum  
Metallic**



**Cosso  
Anthracite**



**Chocolate**



**Malt  
Gold**



**Matt  
White**



**Matt  
Black**



# MEC 18

One single mechanism is suitable for all five luxury BJC series: Iris, Iris Plus, Mega, Style and Miro.

Its structure is ergonomically designed for easy, quick and hassle-free installation. Its compact mechanism makes use of all the space inside the flush-mounting box and facilitates cable routing. It is designed to ensure flawless installation.

- Our one-way and two-way 16A MEC18 switches allow many different applications with the same mechanism, reducing the number of items and references you need to stock.
- The galvanised steel fixing frames are treated to prevent corrosion, ensuring durable installation components.
- The fixing frames feature upper and lower profiles that facilitate assembly and ensure the mechanism is rigidly positioned.


The socket outlets feature safety protection and use standard STAI connectors - an open safety screw system. Just connect and tighten. The screws close with a single operation. Their engraved floating nut prevents the cable from slipping and guarantees a perfect fastening across the whole of the contact surface. The three conductors enter through the top of the socket outlet. They are also screwed onto one side of the socket outlet. Outlets and covers are supplied together but are not pre-assembled, which allows for quick and safe terminal connection and fastening.




Certifications



## The same mechanism for 5 different designs



MEC 18

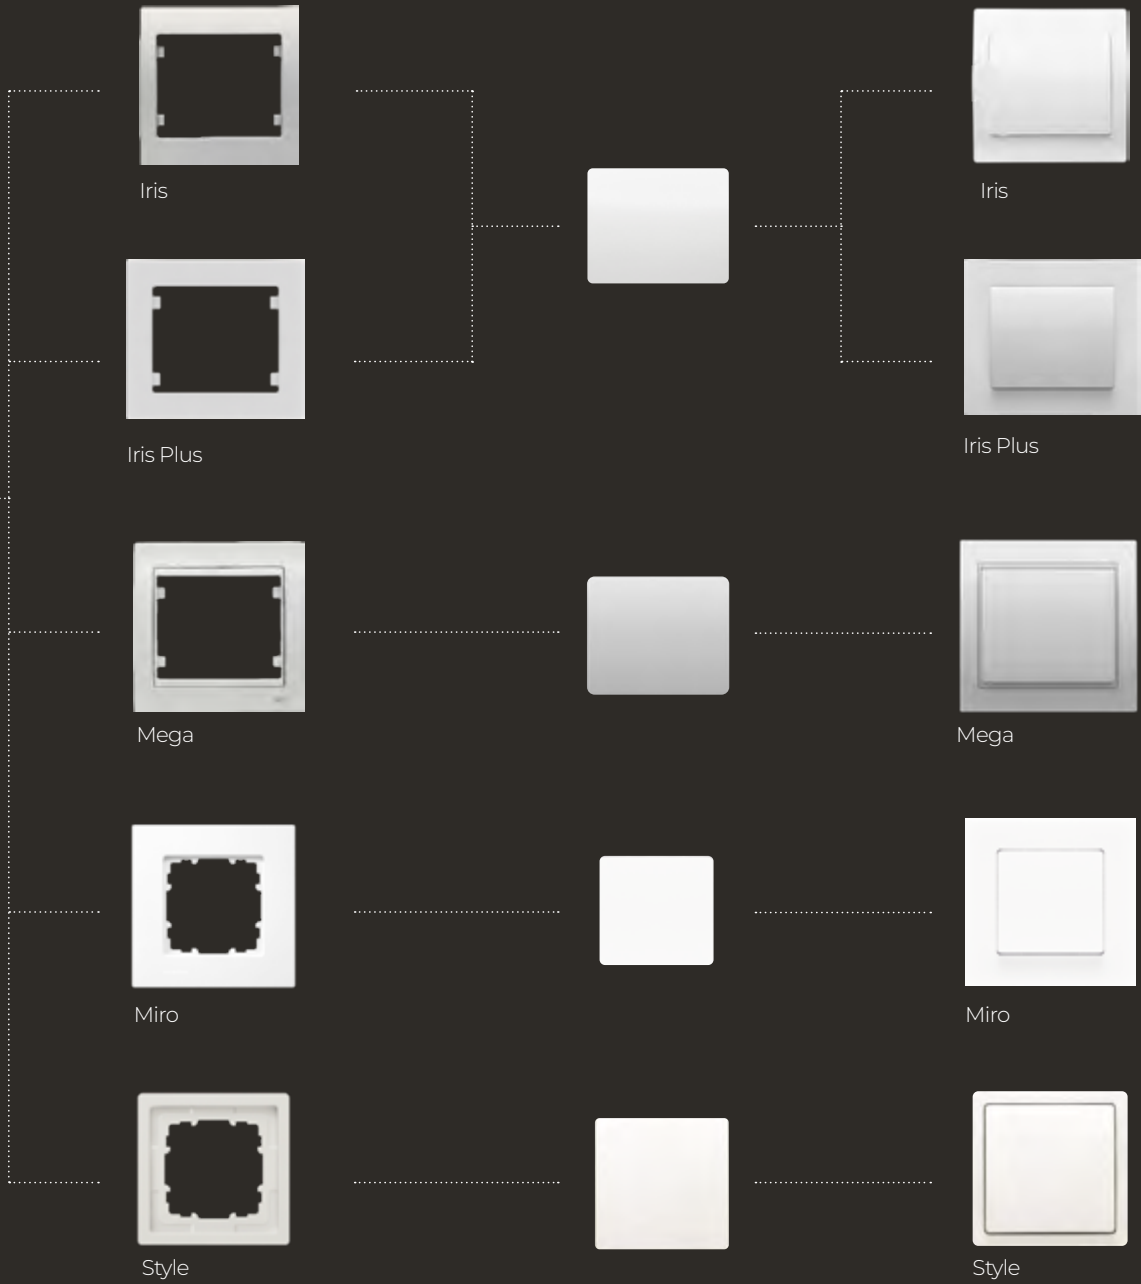



# Design and elegance

Over the years, many aspects of the Style series have remained unchanged, making its functional version one of the most recognised and recognisable on the market. Design and elegance for homes, offices, and hotels.

The modern archetype of the classic series, both in terms of aesthetics and functionality.

Compatible with BJC Nexus BJC Nexus.



Elegant combinations that fully integrate into the spaces of today's buildings.

A design that has conquered homes, as well as professional and commercial environments.

Its structure is ergonomically designed for easy, quick and hassle-free installation.

“The Style series is the modern archetype of the traditional series, both in terms of aesthetics and functionality, which transcend fashion trends.”

# IP44 style

- Now also for outdoor use
- In all colours and frames.
- Schuko® socket outlet, single and double mechanism, TV and RJ.
- A single common IP20 frame from the same series.
- Uses the same IP20 mechanism.



IP44



Style Aluminium Metallic IP44 TV (cover open) + IP44 push-button



Style polar white IP44 RJ (Cover open) + IP44 one-way switch for blinds



# Many different functions

The Style series offers a wide range of functions to meet today's needs. These include light intensity dimmers, sound controllers, and mechanisms for raising and lowering blinds. Choose whichever options you need for your total comfort and enjoy their appealing, colourful designs.



### Dimmers

Dimmers are the perfect way to create an atmosphere in rooms by adjusting the lighting levels to the desired intensity. The intensity can be increased or decreased. Due to the variety of lamp technologies and power levels, it is essential to use a specific dimmer designed to match each lamp. BJC offers a wide range of dimmers suitable for different lamps and power ratings.



### Dual USB chargers

The Schuko® socket outlet with dual USB Type A and Type C allows you to charge two terminals simultaneously while leaving the actual socket free for use. Quick and easy installation in a standard flush-mounting box.

- Power Delivery (required by the EU from 2024)
- Quick charge
- For standard flush-mounting boxes



### Multimedia

Multimedia connectors are the perfect solution to prevent exposed wiring during installation and for the distribution of electronic devices in any type of installation; whether residential or commercial. The HDMI, RJ45, stereo cable and other outputs can provide separate input and output sources, for efficient connections and uncluttered installations.



### RJ and fibre-optic sockets

This allows the fibre-optic cable to reach the required location and enables the router to be easily connected.



### Push-button with indicator light

The indicator light makes it easy to find the push-button in dimly lit areas.




### Style surface mounting box

The surface mounting box in the Style series blends seamlessly with the series' aesthetic design and can be used in non-flush mounting. The cable glands for connections can be used for wiring and terminal strips. They are available in Polar White and Platinum Metallic finishes and for frames with one, two or three gangs.

# 16 A in Mec switches

The switches feature a powerful 16 A device with an automatic terminal connection. Their ergonomic design ensures comfortable, easy and safe handling.

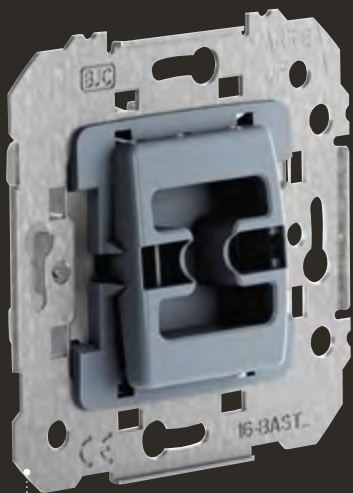

**Mechanism**

The Mec 18 mechanism can be adapted to Iris, Iris Plus, Mega, Miro and Style products for your convenience.



**Frame**

Compact space between the frame and switch. High-quality finishes.



**Switch**

Accurate operation. Smooth and comfortable to the touch.

Reference table for composing basic functions - Style

|                                                    |                   | Polar White  | Platinum Metallic | Cosso Anthracite | Chocolate     | Malt Gold     | Matt White    | Matt Black    |
|----------------------------------------------------|-------------------|--------------|-------------------|------------------|---------------|---------------|---------------|---------------|
| Function                                           | Mechanism         | Switch/Cover | Switch/Cover      | Switch/Cover     | Switch/Cover  | Switch/Cover  | Switch/Cover  | Switch/Cover  |
| One-way switch                                     | 18505             | 61705        | 61705-PM          | 61705-AC         | 61705-CH      | 61705-DM      | 61705-BM      | 61705-NM      |
| Two-way switch                                     | 18506             | 61705        | 61705-PM          | 61705-AC         | 61705-CH      | 61705-DM      | 61705-BM      | 61705-NM      |
| Intermediate switch                                | 18507             | 61705        | 61705-PM          | 61705-AC         | 61705-CH      | 61705-DM      | 61705-BM      | 61705-NM      |
| Double one-way switch                              | 18509             | 61709        | 61709-PM          | 61709-AC         | 61709-CH      | 61709-DM      | 61709-BM      | 61709-NM      |
| Double two-way switch                              | 18510             | 61709        | 61709-PM          | 61709-AC         | 61709-CH      | 61709-DM      | 61709-BM      | 61709-NM      |
| Push-button, bell symbol                           | 18516             | 61716        | 61716-PM          | 61716-AC         | 61716-CH      | 61716-DM      | 61716-BM      | 61716-NM      |
| Push-button, bulb symbol                           | 18516             | 61717        | 61717-PM          | 61717-AC         | 61717-CH      | 61717-DM      | 61717-BM      | 61717-NM      |
| Rotary dimmer                                      | 21550-X           | 61749        | 61749-PM          | 61749-AC         | 61749-CH      | 61749-DM      | 61749-BM      | 61749-NM      |
| Schuko® socket outlet                              | 18524             | 61724        | 61724-PM          | 61724-AC         | 61724-CH      | 61724-DM      | 61724-BM      | 61724-NM      |
| Schuko® socket outlet + dual USB Type A and Type C | 18524-USBC        | 61724-USBC   | 61724-USBC-PM     | 61724-USBC-AC    | 61724-USBC-CH | 61724-USBC-DM | 61724-USBC-BM | 61724-USBC-NM |
| TV cover                                           | Mechanism + Cover | 61330        | 61330-PM          | 61330-AC         | 61330-CH      | 61330-DM      | 61330-BM      | 61330-NM      |
| Single RJ socket outlet                            | 19582-1           | 61782        | 61782-PM          | 61782-AC         | 61782-CH      | 61782-DM      | 61782-BM      | 61782-NM      |
| Double RJ socket outlet                            | 19682-1           | 61882        | 61882-PM          | 61882-AC         | 61882-CH      | 61882-DM      | 61882-BM      | 61882-NM      |
| Blank cover                                        | Mechanism + Cover | 61033        | 61033-PM          | 61033-AC         | 61033-CH      | 61033-DM      | 61033-BM      | 61033-NM      |
| Cable output                                       | Mechanism + Cover | 61734        | 61734-PM          | 61734-AC         | 61734-CH      | 61734-DM      | 61734-BM      | 61734-NM      |
| Buzzer                                             | 18540             | 61740        | 61740-PM          | 61740-AC         | 61740-CH      | 61740-DM      | 61740-BM      | 61740-NM      |
| Key card switch                                    | Mechanism + Cover | 61734        | 61734-PM          | 61734-AC         | 61734-CH      | 61734-DM      | 61734-BM      | 61734-NM      |
| Frame                                              | -                 | 61001        | 61001-PM          | 61001-AC         | 61001-CH      | 61001-DM      | 61001-BM      | 61001-NM      |



Switch mechanisms



**Single pole one-way switch**  
16 A 250 V~  
**Two-way switch**  
10 A 250 V~  
**Intermediate switch**  
10 A 250 V~

Pack of 10

**18505\***  
**18506\***

**18507\***

SWITCH

|              |                 |                 |                 |                 |                 |                 |
|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|              |                 |                 |                 |                 |                 |                 |
| POLAR WHITE  | PLATINUM M.     | ANTHRACITE C.   | CHOCOLATE       | M. GOLD         | MATT WHITE      | MATT BLACK      |
| <b>61705</b> | <b>61705-PM</b> | <b>61705-AC</b> | <b>61705-CH</b> | <b>61705-DM</b> | <b>61705-BM</b> | <b>61705-NM</b> |
| Pack of 10   | 2               | 2               | 2               | 2               | 2               | 2               |

SWITCH WITH A DIFFUSER

|                |                  |                  |                  |                  |                  |                  |
|----------------|------------------|------------------|------------------|------------------|------------------|------------------|
|                |                  |                  |                  |                  |                  |                  |
| POLAR WHITE    | PLATINUM M.      | ANTHRACITE C.    | CHOCOLATE        | M. GOLD          | MATT WHITE       | MATT BLACK       |
| <b>61705-L</b> | <b>61705-PML</b> | <b>61705-ACL</b> | <b>61705-CHL</b> | <b>61705-DML</b> | <b>61705-BML</b> | <b>61705-NML</b> |
| Pack of 10     | 2                | 2                | 2                | 2                | 2                | 2                |



**Single pole one-way switch with control light**  
**Two-way switch with control light**  
**Two-way switch with indicator light**

16 A 250 V~

Pack of 10

Indicator lamp incorporated in reference 18506-L

**18605\***  
**18606\***

**18506-L\***

SWITCH WITH A DIFFUSER

|                |                  |                  |                  |                  |                  |                  |
|----------------|------------------|------------------|------------------|------------------|------------------|------------------|
|                |                  |                  |                  |                  |                  |                  |
| POLAR WHITE    | PLATINUM M.      | ANTHRACITE C.    | CHOCOLATE        | M. GOLD          | MATT WHITE       | MATT BLACK       |
| <b>61705-L</b> | <b>61705-PML</b> | <b>61705-ACL</b> | <b>61705-CHL</b> | <b>61705-DML</b> | <b>61705-BML</b> | <b>61705-NML</b> |
| Pack of 10     | 2                | 2                | 2                | 2                | 2                | 2                |



**2 pole one-way switch**  
**2 pole one-way switch with control light**  
16 A 250 V~  
Only switches with indicator light  
Pack of 10

Indicator lamp incorporated in reference 18608

**18508\***  
**18608\***

SWITCH WITH I/O

|              |                 |                 |                 |                 |                 |                 |
|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|              |                 |                 |                 |                 |                 |                 |
| POLAR WHITE  | PLATINUM M.     | ANTHRACITE C.   | CHOCOLATE       | M. GOLD         | MATT WHITE      | MATT BLACK      |
| <b>61708</b> | <b>61708-PM</b> | <b>61708-AC</b> | <b>61708-CH</b> | <b>61708-DM</b> | <b>61708-BM</b> | <b>61708-NM</b> |
| Pack of 2    | 2               | 2               | 2               | 2               | 2               | 2               |

SWITCH WITH I/O SYMBOLS AND DIFFUSER

|                |                  |                  |                  |                  |                  |                  |
|----------------|------------------|------------------|------------------|------------------|------------------|------------------|
|                |                  |                  |                  |                  |                  |                  |
| POLAR WHITE    | PLATINUM M.      | ANTHRACITE C.    | CHOCOLATE        | M. GOLD          | MATT WHITE       | MATT BLACK       |
| <b>61708-L</b> | <b>61708-PML</b> | <b>61708-ACL</b> | <b>61708-CHL</b> | <b>61708-DML</b> | <b>61708-BML</b> | <b>61708-NML</b> |
| Pack of 2      | 2                | 2                | 2                | 2                | 2                | 2                |

Double one-way switch / push-button mechanisms



**Double one-way switch**  
**Double two-way switch**  
16 A 250 V~  
**Double push-button**  
10 A 250 V~  
**Double normally-closed push-button**  
10 A 250 V~

Pack of 10

**18509\***  
**18510\***

**18511\***

**18513\***

DOUBLE SWITCH

|              |                 |                 |                 |                 |                 |                 |
|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|              |                 |                 |                 |                 |                 |                 |
| POLAR WHITE  | PLATINUM M.     | ANTHRACITE C.   | CHOCOLATE       | M. GOLD         | MATT WHITE      | MATT BLACK      |
| <b>61709</b> | <b>61709-PM</b> | <b>61709-AC</b> | <b>61709-CH</b> | <b>61709-DM</b> | <b>61709-BM</b> | <b>61709-NM</b> |
| Pack of 10   | 2               | 2               | 2               | 2               | 2               | 2               |

DOUBLE SWITCH WITH A DIFFUSER

|                |                  |                  |                  |                  |                  |                  |
|----------------|------------------|------------------|------------------|------------------|------------------|------------------|
|                |                  |                  |                  |                  |                  |                  |
| POLAR WHITE    | PLATINUM M.      | ANTHRACITE C.    | CHOCOLATE        | M. GOLD          | MATT WHITE       | MATT BLACK       |
| <b>61709-L</b> | <b>61709-PML</b> | <b>61709-ACL</b> | <b>61709-CHL</b> | <b>61709-DML</b> | <b>61709-BML</b> | <b>61709-NML</b> |
| Pack of 10     | 2                | 2                | 2                | 2                | 2                | 2                |



**Double push-button with lamp**  
10 A 250 V~


Pack of 10

Indicator lamp incorporated in reference 18511-L

**18511-L\***

DOUBLE SWITCH WITH A DIFFUSER

|                |                  |                  |                  |                  |                  |                  |
|----------------|------------------|------------------|------------------|------------------|------------------|------------------|
|                |                  |                  |                  |                  |                  |                  |
| POLAR WHITE    | PLATINUM M.      | ANTHRACITE C.    | CHOCOLATE        | M. GOLD          | MATT WHITE       | MATT BLACK       |
| <b>61709-L</b> | <b>61709-PML</b> | <b>61709-ACL</b> | <b>61709-CHL</b> | <b>61709-DML</b> | <b>61709-BML</b> | <b>61709-NML</b> |
| Pack of 10     | 2                | 2                | 2                | 2                | 2                | 2                |



**Two-way switch + Push-button**  
16 A + 10 A 250 V~

Pack of 10

**18515\***

DOUBLE TWO-WAY PUSH-BUTTON SWITCH WITH BELL SYMBOL

|              |                 |                 |                 |                 |                 |                 |
|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|              |                 |                 |                 |                 |                 |                 |
| POLAR WHITE  | PLATINUM M.     | ANTHRACITE C.   | CHOCOLATE       | M. GOLD         | MATT WHITE      | MATT BLACK      |
| <b>61715</b> | <b>61715-PM</b> | <b>61715-AC</b> | <b>61715-CH</b> | <b>61715-DM</b> | <b>61715-BM</b> | <b>61715-NM</b> |
| Pack of 2    | 2               | 2               | 2               | 2               | 2               | 2               |

\* The Miro and Style series are compatible with MEC18 mechanisms manufactured from January 2017 onwards.

\* The Miro and Style series are compatible with MEC18 mechanisms manufactured from January 2017 onwards.

Push-button mechanism



**Push-button** **18516\***  
**Normally-closed push-button 18512\***  
10 A 250 V~

Pack of 10

Note:  
Engraving of picto-  
grams on request



| SWITCH WITH BELL SYMBOL                |                                 |                                   |                               |                             |                                |                                |
|----------------------------------------|---------------------------------|-----------------------------------|-------------------------------|-----------------------------|--------------------------------|--------------------------------|
|                                        |                                 |                                   |                               |                             |                                |                                |
| POLAR WHITE<br><b>61716</b>            | PLATINUM M.<br><b>61716-PM</b>  | ANTHRACITE C.<br><b>61716-AC</b>  | CHOCOLATE<br><b>61716-CH</b>  | M. GOLD<br><b>61716-DM</b>  | MATT WHITE<br><b>61716-BM</b>  | MATT BLACK<br><b>61716-NM</b>  |
| Pack of 10                             | 2                               | 2                                 | 2                             | 2                           | 2                              | 2                              |
| SWITCH WITH A DIFFUSER AND BELL SYMBOL |                                 |                                   |                               |                             |                                |                                |
|                                        |                                 |                                   |                               |                             |                                |                                |
| POLAR WHITE<br><b>61716-L</b>          | PLATINUM M.<br><b>61716-PML</b> | ANTHRACITE C.<br><b>61716-ACL</b> | CHOCOLATE<br><b>61716-CHL</b> | M. GOLD<br><b>61716-DML</b> | MATT WHITE<br><b>61716-BML</b> | MATT BLACK<br><b>61716-NML</b> |
| Pack of 10                             | 2                               | 2                                 | 2                             | 2                           | 2                              | 2                              |
| SWITCH WITH BULB SYMBOL                |                                 |                                   |                               |                             |                                |                                |
|                                        |                                 |                                   |                               |                             |                                |                                |
| POLAR WHITE<br><b>61717</b>            | PLATINUM M.<br><b>61717-PM</b>  | ANTHRACITE C.<br><b>61717-AC</b>  | CHOCOLATE<br><b>61717-CH</b>  | M. GOLD<br><b>61717-DM</b>  | MATT WHITE<br><b>61717-BM</b>  | MATT BLACK<br><b>61717-NM</b>  |
| Pack of 10                             | 2                               | 2                                 | 2                             | 2                           | 2                              | 2                              |
| SWITCH WITH A DIFFUSER AND BULB SYMBOL |                                 |                                   |                               |                             |                                |                                |
|                                        |                                 |                                   |                               |                             |                                |                                |
| POLAR WHITE<br><b>61717-L</b>          | PLATINUM M.<br><b>61717-PML</b> | ANTHRACITE C.<br><b>61717-ACL</b> | CHOCOLATE<br><b>61717-CHL</b> | M. GOLD<br><b>61717-DML</b> | MATT WHITE<br><b>61717-BML</b> | MATT BLACK<br><b>61717-NML</b> |
| Pack of 10                             | 2                               | 2                                 | 2                             | 2                           | 2                              | 2                              |

Timer switch



**Multifunction tablet timer switch** **TMP-3H**  
9 functions  
Power supply voltage 230V 50-60Hz  
4-wire  
With neutral  
Compatible with R, L and C loads

Pack of 1



**Multifunction tablet timer switch** **TMP-4H**  
Screwless terminal  
Power supply voltage 230V 50-60Hz  
4-wire  
Compatible with R, L and C loads

Pack of 1

Indicator lights



**Blue LED indicator light** **18039-1AZ**  
230 V~  
Indicator lights for 2 pole one-way switches and single pole one-way switches with control light  
Wide switch

18039-1AZ Pack of 5



**Blue LED indicator light** **18039-2AZ**  
230 V~  
Indicator lights for one-way and two-way and intermediate switches and push-buttons  
Wide switch

18039-2AZ Pack of 10



**Blue LED indicator light** **18039-3AZ**  
230 V~  
Indicator lights for all the different kinds of mechanisms  
Narrow rocker

18039-3AZ Pack of 10



**Load for indicator lights with energy saving and fluorescent lamps** **3139**

Pack of 1

Key card switch

**Key card switch with indicator light**  
Mechanical operation via insertion of key cards  
For key cards up to 54x65 mm and 0.7-1.0 mm thick  
230 Vac 10A  
Contact NO

| KEY CARD SWITCH             |                                |                                  |                              |                            |                               |                               |
|-----------------------------|--------------------------------|----------------------------------|------------------------------|----------------------------|-------------------------------|-------------------------------|
|                             |                                |                                  |                              |                            |                               |                               |
| POLAR WHITE<br><b>61068</b> | PLATINUM M.<br><b>61068-PM</b> | ANTHRACITE C.<br><b>61068-AC</b> | CHOCOLATE<br><b>61068-CH</b> | M. GOLD<br><b>61068-DM</b> | MATT WHITE<br><b>61068-BM</b> | MATT BLACK<br><b>61068-NM</b> |
| Pack of 1                   | 1                              | 1                                | 1                            | 1                          | 1                             | 1                             |



**Bulb** **19039-AZ**  
Spare part for key card switch

Pack of 1

Blinds control



**Double push-button for blinds** **18565\***  
**Double one-way switch for blinds** **18569\***

With electrical and mechanical interlocking device  
10 A 250 V~

Pack of 10

| DOUBLE SWITCH FOR BLINDS    |                                |                                  |                              |                            |                               |                               |
|-----------------------------|--------------------------------|----------------------------------|------------------------------|----------------------------|-------------------------------|-------------------------------|
|                             |                                |                                  |                              |                            |                               |                               |
| POLAR WHITE<br><b>61765</b> | PLATINUM M.<br><b>61765-PM</b> | ANTHRACITE C.<br><b>61765-AC</b> | CHOCOLATE<br><b>61765-CH</b> | M. GOLD<br><b>61765-DM</b> | MATT WHITE<br><b>61765-BM</b> | MATT BLACK<br><b>61765-NM</b> |
| Pack of 10                  | 2                              | 2                                | 2                            | 2                          | 2                             | 2                             |

**Double push-button** **18511\***  
Requires auxiliary device specific to each blind manufacturer  
No interlocking device  
10 A 250 V~

Pack of 10

\* The Miro and Style series are compatible with MEC18 mechanisms manufactured from January 2017 onwards.



**Blind controller for installation in a flush-mounting box** **2393**  
Blind control (insert) for 230 V single-phase motors  
Max power: 1250 VA  
Local or centralised operation  
Operation adjustable from 1 to 120 sec.  
For installation with double push-buttons (18511)

Pack of 1

Dimmers



**A two-way dimmer for high- and low-voltage LED, incandescent and halogen lamps with a magnetic transformer**

Power supply: 230 V / 50 Hz  
LED: 230V 3-85W  
Direct halogens: 20-250W  
Halogens with a ferromagnetic transformer: 20-250VA  
Fuse: T2AH/250V  
Screw connection  
Phase shut-off: Leading-Edge  
Pack of 1



**A two-way dimmer for high- and low-voltage incandescent AND halogen lamps with a magnetic transformer**

Power supply: 230VAC / 50Hz  
Halogens with a ferromagnetic transformer: 20-500VA  
Direct halogens: 20-500W  
Fuse: T2AH/250V  
Screw connection  
Phase shut-off: Leading-Edge  
Pack of 1



**Device for controlling luminaires with 1-10V fluorescence regulation**

Power supply: 230VAC 50-60Hz  
Control voltage: 1-12V  
Maximum control current: 40mA  
Load connection: 10A  
Fuse: F0.8/250V  
Screw connection  
Pack of 1

**COVER AND BUTTON**

|                             |                                |                                  |                              |                            |                               |                               |
|-----------------------------|--------------------------------|----------------------------------|------------------------------|----------------------------|-------------------------------|-------------------------------|
|                             |                                |                                  |                              |                            |                               |                               |
| POLAR WHITE<br><b>61749</b> | PLATINUM M.<br><b>61749-PM</b> | ANTHRACITE C.<br><b>61749-AC</b> | CHOCOLATE<br><b>61749-CH</b> | M. GOLD<br><b>61749-DM</b> | MATT WHITE<br><b>61749-BM</b> | MATT BLACK<br><b>61749-NM</b> |
| Pack of 1                   | 1                              | 1                                | 1                            | 1                          | 1                             | 1                             |

Dimmers for push-buttons



**Universal tablet dimmer with load adjustment**

R, L, C, LED, ESL  
Power supply voltage 230V - 50/60Hz  
Consumption: 3W  
Suitable for 230V halogen lamps, halogen lamps with ferromagnetic trans, halogen lamps with electronic trans. and LED loads 230 V

**DIP-RLC**

Pack of 1

Load connection

| LOAD TYPE |                |                     |                                                                    |                                                            |                |                                    |                                           |                                                |
|-----------|----------------|---------------------|--------------------------------------------------------------------|------------------------------------------------------------|----------------|------------------------------------|-------------------------------------------|------------------------------------------------|
|           | Mechanism type | 230 V halogen lamps | Low voltage halogens 12 V (R) with a ferromagnetic transformer (L) | Low voltage halogens lamps with electronic transformer (C) | LED Load 230 V | LED Strips, monochrome (12-48 VDC) | Dimmable Compact Fluorescent Lamps (CFLs) | Electronic ballast with 1-10V regulation input |
| 21553-X   | Rotary         | 20-500W             | 20-500 VA                                                          | NO                                                         | NO             | NO                                 | NO                                        | NO                                             |
| 21555-X   | Rotary         | NO                  | NO                                                                 | NO                                                         | NO             | NO                                 | NO                                        | 1-10 V                                         |
| 21550-X   | Rotary         | 20-250W             | 20-250 VA                                                          | NO                                                         | 3-85W          | NO                                 | NO                                        | NO                                             |
| DIP-RLC   | Push-button    | 160W                | 160 VA                                                             | 160W                                                       | 50-160W        | NO                                 | 160W                                      | NO                                             |

A list of compatibility-tested LED lamps is available at [www.bjc.es/documentation](http://www.bjc.es/documentation)

Socket outlets with safety protection



**Schuko® socket outlet (lateral earthing) with safety protection**

Screwed terminals 16 A 250 V~

Pack of 10



**2P-E Schuko® socket outlet with dual USB type A and type C charger, with fast charging capacity and Power Delivery**

Schuko® socket outlet  
- 230Vac 50Hz, 16A  
- Screwless terminal  
Dual USB charger:  
- 1 USB type A socket and 1 USB type C socket  
- Maximum power: 20W  
- Quick charge Power Delivery USB C: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Quick charge USB A: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Normal charge:  
  · 5V/3.4A when using USB A and USB C at the same time  
  · 5V/2.4A when using USB A or USB C individually  
- Short circuit protection  
- Temperature protection  
Compliant with UNE 20315-1-1/1-2 and EN 62368-1 standards

Pack of 1



**Schuko® socket outlet with screwless terminal with claws**

**Schuko® socket outlet with screwless terminal without claws**

Screwless  
For flexible or rigid 2.5mm conductors  
Screwless terminal system

Pack of 10

**FRONT OF THE MECHANISM**

|                             |                                |                                  |                              |                            |                               |                               |
|-----------------------------|--------------------------------|----------------------------------|------------------------------|----------------------------|-------------------------------|-------------------------------|
|                             |                                |                                  |                              |                            |                               |                               |
| POLAR WHITE<br><b>61724</b> | PLATINUM M.<br><b>61724-PM</b> | ANTHRACITE C.<br><b>61724-AC</b> | CHOCOLATE<br><b>61724-CH</b> | M. GOLD<br><b>61724-DM</b> | MATT WHITE<br><b>61724-BM</b> | MATT BLACK<br><b>61724-NM</b> |
| Pack of 10                  | 2                              | 2                                | 2                            | 2                          | 2                             | 2                             |

**STYLE SCHUKO COVER WITH SAFETY PROTECTION**

|                                  |                                      |                                        |                                    |                                  |                                     |                                     |
|----------------------------------|--------------------------------------|----------------------------------------|------------------------------------|----------------------------------|-------------------------------------|-------------------------------------|
|                                  |                                      |                                        |                                    |                                  |                                     |                                     |
| POLAR WHITE<br><b>61724-USBC</b> | PLATINUM M.<br><b>61724-US-BC-PM</b> | ANTHRACITE C.<br><b>61724-US-BC-AC</b> | CHOCOLATE<br><b>61724-US-BC-CH</b> | M. GOLD<br><b>61724-US-BC-DM</b> | MATT WHITE<br><b>61724-US-BC-BM</b> | MATT BLACK<br><b>61724-US-BC-NM</b> |
| Pack of 1                        | 1                                    | 1                                      | 1                                  | 1                                | 1                                   | 1                                   |

**STYLE SCHUKO COVER WITH SAFETY PROTECTION**

|                             |                                |                                  |                              |                            |                               |                               |                        |
|-----------------------------|--------------------------------|----------------------------------|------------------------------|----------------------------|-------------------------------|-------------------------------|------------------------|
|                             |                                |                                  |                              |                            |                               |                               |                        |
| POLAR WHITE<br><b>61732</b> | PLATINUM M.<br><b>61732-PM</b> | ANTHRACITE C.<br><b>61732-AC</b> | CHOCOLATE<br><b>61732-CH</b> | M. GOLD<br><b>61732-DM</b> | MATT WHITE<br><b>61732-BM</b> | MATT BLACK<br><b>61732-NM</b> | RED<br><b>61732-RD</b> |
| Pack of 10                  | 2                              | 2                                | 2                            | 2                          | 2                             | 2                             | 1                      |

**STYLE SCHUKO COVER WITH SAFETY PROTECTION AND LABELLING FIELD**

|                               |                                  |                                    |                                |                              |                                 |                                 |                          |
|-------------------------------|----------------------------------|------------------------------------|--------------------------------|------------------------------|---------------------------------|---------------------------------|--------------------------|
|                               |                                  |                                    |                                |                              |                                 |                                 |                          |
| POLAR WHITE<br><b>61732-E</b> | PLATINUM M.<br><b>61732-E-PM</b> | ANTHRACITE C.<br><b>61732-E-AC</b> | CHOCOLATE<br><b>61732-E-CH</b> | M. GOLD<br><b>61732-E-DM</b> | MATT WHITE<br><b>61732-E-BM</b> | MATT BLACK<br><b>61732-E-NM</b> | RED<br><b>61732-E-RD</b> |
| Pack of 1                     | 1                                | 1                                  | 1                              | 1                            | 1                               | 1                               | 1                        |

**STYLE SCHUKO COVER WITH SAFETY PROTECTION VOLTAGE INDICATOR ON OUTLET**

|                                |                                   |                                     |                                 |                               |                                  |                                  |
|--------------------------------|-----------------------------------|-------------------------------------|---------------------------------|-------------------------------|----------------------------------|----------------------------------|
|                                |                                   |                                     |                                 |                               |                                  |                                  |
| POLAR WHITE<br><b>61732-EI</b> | PLATINUM M.<br><b>61732-EI-PM</b> | ANTHRACITE C.<br><b>61732-EI-AC</b> | CHOCOLATE<br><b>61732-EI-CH</b> | M. GOLD<br><b>61732-EI-DM</b> | MATT WHITE<br><b>61732-EI-BM</b> | MATT BLACK<br><b>61732-EI-NM</b> |
| Pack of 1                      | 1                                 | 1                                   | 1                               | 1                             | 1                                | 1                                |



Socket outlets with safety protection



**Schuko® socket outlet with screwless terminal with claws** **19532-X**

**Schuko® socket outlet with screwless terminal without claws** **19532**

Screwless  
For flexible or rigid 2.5mm conductors  
Screwless terminal system

Pack of 10

STYLE SCHUKO SPRING LID WITH SAFETY PROTECTION

|                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |
| POLAR WHITE<br><b>61814</b>                                                       | PLATINUM M.<br><b>61814-PM</b>                                                    | ANTHRACITE C.<br><b>61814-AC</b>                                                  | CHOCOLATE<br><b>61814-CH</b>                                                       | M. GOLD<br><b>61814-DM</b>                                                          | MATT WHITE<br><b>61814-BM</b>                                                       | MATT BLACK<br><b>61814-NM</b>                                                       |
| Pack of 1                                                                         | 1                                                                                 | 1                                                                                 | 1                                                                                  | 1                                                                                   | 1                                                                                   | 1                                                                                   |

STYLE SCHUKO SPRING LID WITH SAFETY PROTECTION LABEL VOLTAGE INDICATOR ON SOCKET

|                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |
| POLAR WHITE<br><b>61814-EI</b>                                                    | PLATINUM M.<br><b>61814-EI-PM</b>                                                 | ANTHRACITE C.<br><b>61814-EI-AC</b>                                               | CHOCOLATE<br><b>61814-EI-CH</b>                                                    | M. GOLD<br><b>61814-EI-DM</b>                                                       | MATT WHITE<br><b>61814-EI-BM</b>                                                    | MATT BLACK<br><b>61814-EI-NM</b>                                                    |
| Pack of 1                                                                         | 1                                                                                 | 1                                                                                 | 1                                                                                  | 1                                                                                   | 1                                                                                   | 1                                                                                   |



**IP44 gasket kit** **2395**

For SCHUKO socket outlets with Miro and Style spring lid

Pack of 1



**Lamp for SCHUKO socket with operating indicator** **2394**

1.5 mA, 230 V AW/ 50 Hz

Pack of 1



**2P+E socket outlet (French standard) with safety protection** **18572**

Screwed terminals 16 A 250 V~

Pack of 10

For export only.

STYLE FRENCH SOCKET COVER

|                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |
| POLAR WHITE<br><b>61772</b>                                                         | PLATINUM M.<br><b>61772-PM</b>                                                      | ANTHRACITE C.<br><b>61772-AC</b>                                                    | CHOCOLATE<br><b>61772-CH</b>                                                         | M. GOLD<br><b>61772-DM</b>                                                            | MATT WHITE<br><b>61772-BM</b>                                                         | MATT BLACK<br><b>61772-NM</b>                                                         |
| Pack of 10                                                                          | 2                                                                                   | 2                                                                                   | 2                                                                                    | 2                                                                                     | 2                                                                                     | 2                                                                                     |

TV-FM-R/TV-SAT socket outlets



**TV\_FM socket outlet Series 2-10** **2932**

**Final outlet** **2933**

**Individual installation** **2934**

(Manufacturer: TELEVÉS)

TV-FM-R/TV-SAT COVER 2/3 OUTLETS

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |
| POLAR WHITE<br><b>61330</b>                                                         | PLATINUM M.<br><b>61330-PM</b>                                                      | ANTHRACITE C.<br><b>61330-AC</b>                                                    | CHOCOLATE<br><b>61330-CH</b>                                                        | M. GOLD<br><b>61330-DM</b>                                                          | MATT WHITE<br><b>61330-BM</b>                                                       | MATT BLACK<br><b>61330-NM</b>                                                       |
| Pack of 10                                                                          | 1                                                                                   | 2                                                                                   | 2                                                                                   | 2                                                                                   | 1                                                                                   | 1                                                                                   |

**R/TV-SAT socket with 2 outputs**

**Series 6-12** **2921**

**Series 2-5** **2922**

**Final outlet** **2923**

**Individual installation** **2924**

(Manufacturer: TELEVÉS)

Pack of 10



**R/TV-SAT socket with 3 outputs** **2918**

**Individual socket installation** **2918**

(Manufacturer: TELEVÉS)

Pack of 1

The IP44 functions work with the standard frames in the series.

IP44 switch solutions



One-way switch  
Two-way switch 16 A  
Intermediate switch  
Push-button  
Push-button two-way switch

19505-X  
19506-X  
19507-X  
19516-X  
19511-2X

Pack of 1

| WIDE SWITCH              |             |               |              |              |              |              |              |
|--------------------------|-------------|---------------|--------------|--------------|--------------|--------------|--------------|
| POLAR WHITE              | PLATINUM M. | ANTHRACITE C. | CHOCOLATE    | M. GOLD      | MATT WHITE   | MATT BLACK   |              |
| 61705-IP                 | 61705-IP-PM | 61705-IP-AC   | 61705-IP-CH  | 61705-IP-DM  | 61705-IP-BM  | 61705-IP-NM  |              |
| Pack of 1                | 1           | 1             | 1            | 1            | 1            | 1            |              |
| Bell symbol              | 61716-IP    | 61716-IP-PM   | 61716-IP-AC  | 61716-IP-CH  | 61716-IP-DM  | 61716-IP-BM  | 61716-IP-NM  |
| Pack of 1                | 1           | 1             | 1            | 1            | 1            | 1            | 1            |
| Bulb symbol              | 61717-IP    | 61717-IP-PM   | 61717-IP-AC  | 61717-IP-CH  | 61717-IP-DM  | 61717-IP-BM  | 61717-IP-NM  |
| Pack of 1                | 1           | 1             | 1            | 1            | 1            | 1            | 1            |
| Bulb symbol and diffuser | 61716-IP-L  | 61716-IP-PML  | 61716-IP-ACL | 61716-IP-CHL | 61716-IP-DML | 61716-IP-BML | 61716-IP-NML |
| Pack of 1                | 1           | 1             | 1            | 1            | 1            | 1            | 1            |

These switches are only suitable for IP44 use with the above-indicated mechanisms, when used together with the corresponding gasket. They are not suitable for MEC18 mechanisms



Double one-way switch  
Double two-way switch  
Double push-button

19509-X  
19510-X  
19511-X

Pack of 1

| DOUBLE SWITCH |             |               |             |             |             |             |  |
|---------------|-------------|---------------|-------------|-------------|-------------|-------------|--|
| POLAR WHITE   | PLATINUM M. | ANTHRACITE C. | CHOCOLATE   | M. GOLD     | MATT WHITE  | MATT BLACK  |  |
| 61709-IP      | 61709-IP-PM | 61709-IP-AC   | 61709-IP-CH | 61709-IP-DM | 61709-IP-BM | 61709-IP-NM |  |
| Pack of 1     | 1           | 1             | 1           | 1           | 1           | 1           |  |

These switches are only suitable for IP44 use with the above-indicated mechanisms, when used together with the corresponding gasket. They are not suitable for MEC18 mechanisms



One-way switch for blinds  
Double push-button for blinds

19569-X  
19565-X

Pack of 1

| DOUBLE SWITCH FOR BLINDS |             |               |             |             |             |             |  |
|--------------------------|-------------|---------------|-------------|-------------|-------------|-------------|--|
| POLAR WHITE              | PLATINUM M. | ANTHRACITE C. | CHOCOLATE   | M. GOLD     | MATT WHITE  | MATT BLACK  |  |
| 61765-IP                 | 61765-IP-PM | 61765-IP-AC   | 61765-IP-CH | 61765-IP-DM | 61765-IP-BM | 61765-IP-NM |  |
| Pack of 1                | 1           | 1             | 1           | 1           | 1           | 1           |  |

These switches are only suitable for IP44 use with the above-indicated mechanisms, when used together with the corresponding gasket. They are not suitable for MEC18 mechanisms

Replacement gaskets for switches

2396

Suitable for single and double mechanisms shown on this page.

Pack of 1

The IP44 functions work with the standard frames in the series.

IP44 socket solutions



Schuko® socket outlet with screwless terminal with claws

Schuko® socket outlet with screwless terminal without claws

Screwless  
Screwless terminal for 2.5 mm flexible or rigid conductors

Pack of 1

| STYLE SCHUKO SPRING LID WITH SAFETY PROTECTION |             |               |             |             |            |             |  |
|------------------------------------------------|-------------|---------------|-------------|-------------|------------|-------------|--|
| POLAR WHITE                                    | PLATINUM M. | ANTHRACITE C. | CHOCOLATE   | M. GOLD     | MATT WHITE | MATT BLACK  |  |
| 61814-IP                                       | 61814-IP-PM | 61814-IP-AC   | 61814-IP-CH | 61814-IP-DM | 6181-IP-BM | 61814-IP-NM |  |
| Pack of 1                                      | 1           | 1             | 1           | 1           | 1          | 1           |  |


Includes IP44 sealing gaskets

IP44 gasket kit 2395

Spare part for IP44 61814-IP covers

Pack of 1

Socket solutions for TV-FM-R/TV-SAT IP44



TV\_FM socket outlet  
Series 2-10 2932  
Final outlet 2933  
Individual installation 2934  
(Manufacturer: TELEVÉS)

R/TV-SAT socket with 2 outputs  
Series 6-12 2921  
Series 2-5 2922  
Final outlet 2923  
Individual installation 2924

Pack of 10

| STYLE TELEVISION COVER 2 OUTPUTS WITH IP44 GASKETS |             |               |             |             |  |
|----------------------------------------------------|-------------|---------------|-------------|-------------|--|
| POLAR WHITE                                        | PLATINUM M. | ANTHRACITE C. | CHOCOLATE   | M. GOLD     |  |
| 61320-IP                                           | 61320-IP-PM | 61320-IP-AC   | 61320-IP-CH | 61320-IP-DM |  |
| Pack of 1                                          | 1           | 1             | 1           | 1           |  |

RJ IP44 connectivity terminals



Adapter for 1 RJ45/RJ11 connector (AMP, ITT, etc.) 19582-1

Pack of 10

| STYLE COVER FOR RJ45 CONNECTOR WITH IP44 GASKETS |             |               |             |             |  |
|--------------------------------------------------|-------------|---------------|-------------|-------------|--|
| POLAR WHITE                                      | PLATINUM M. | ANTHRACITE C. | CHOCOLATE   | M. GOLD     |  |
| 61782-IP                                         | 61782-IP-PM | 61782-IP-AC   | 61782-IP-CH | 61782-IP-DM |  |
| Pack of 1                                        | 1           | 1             | 1           | 1           |  |



Standard Keystone RJ45 connector 3186-B  
Cat. 6  
White  
Tool-free terminal

Pack of 25

The IP44 functions work with the standard frames in the series.

RJ type connectivity terminals



**Support for 1 standard RJ Keystone connector**

Pack of 10

19582-1

COVER FOR SINGLE RJ OR FIBRE OPTIC TERMINALS

POLAR WHITE  
61782

PLATINUM M.  
61782-PM

ANTHRACITE C.  
61782-AC

CHOCOLATE  
61782-CH

M. GOLD  
61782-DM

MATT WHITE  
61782-BM

MATT BLACK  
61782-NM

Pack of

10

1

1

1

1

1

1



**Support for 2 standard RJ Keystone connectors**

Pack of 10

19682-1

COVER FOR DOUBLE RJ OR FIBRE OPTIC TERMINALS

POLAR WHITE  
61882

PLATINUM M.  
61882-PM

ANTHRACITE C.  
61882-AC

CHOCOLATE  
61882-CH

M. GOLD  
61882-DM

MATT WHITE  
61882-BM

MATT BLACK  
61882-NM

Pack of

1

1

1

1

1

1

1



**Standard Keystone RJ45 connector**  
Cat. 6  
White  
Tool-free terminal

Pack of 25

3186-B



**6-way RJ11 female connector telephone jack for BAT in basic telephone networks (screwless terminal)**

Pack of 10

19582

COVER FOR SINGLE RJ OR FIBRE OPTIC TERMINALS

POLAR WHITE  
61782

PLATINUM M.  
61782-PM

ANTHRACITE C.  
61782-AC

CHOCOLATE  
61782-CH

M. GOLD  
61782-DM

MATT WHITE  
61782-BM

MATT BLACK  
61782-NM

Pack of

10

1

1

1

1

1

1



**8--way female RJ45 connector Cat. 6**  
Tool-free connection by insulation piercing

Pack of 10

18586



**Double 8-way RJ45 female connector Cat. 6**  
Tool-free connection by insulation piercing

Pack of 1

18586-2

COVER FOR DOUBLE RJ OR FIBRE OPTIC TERMINALS

POLAR WHITE  
61882

PLATINUM M.  
61882-PM

ANTHRACITE C.  
61882-AC

CHOCOLATE  
61882-CH

M. GOLD  
61882-DM

MATT WHITE  
61882-BM

MATT BLACK  
61882-NM

Pack of

1

1

1

1

1

1

1

SW/APC fiber optic solutions



**Support for 1 standard RJ Keystone connector**

Pack of 10

19582-1

COVER FOR SINGLE RJ OR FIBRE OPTIC TERMINALS

POLAR WHITE  
61782

PLATINUM M.  
61782-PM

ANTHRACITE C.  
61782-AC

CHOCOLATE  
61782-CH

M. GOLD  
61782-DM

MATT WHITE  
61782-BM

MATT BLACK  
61782-NM

Pack of

10

1

1

1

1

1

1



**Support for 2 standard RJ Keystone connectors**

Pack of 10

19682-1

COVER FOR DOUBLE RJ OR FIBRE OPTIC TERMINALS

POLAR WHITE  
61882

PLATINUM M.  
61882-PM

ANTHRACITE C.  
61882-AC

CHOCOLATE  
61882-CH

M. GOLD  
61882-DM

MATT WHITE  
61882-BM

MATT BLACK  
61882-NM

Pack of

1

1

1

1

1

1

1



**Coupler for SW/APC-type optical fibre connector**

Pack of 20

3191



**A KEYSTONE ADAPTER should be used with coupler 3191 in RJ adapters**

Pack of 20

3190

For proper use of this adapter, an increased-depth flush-mounting box is recommended

Multimedia connectors



**Type A HDMI connector**  
Screw terminal connection  
White  
Beige  
Grey

Pack of 1

18578-HDMI  
18578-HDMI-A  
18578-HDMI-G

COVER FOR MULTIMEDIA SOCKETS

POLAR WHITE  
61778

PLATINUM M.  
61778-PM

ANTHRACITE C.  
61778-AC

CHOCOLATE  
61778-CH

M. GOLD  
61778-DM

MATT WHITE  
61778-BM

MATT BLACK  
61778-NM

Pack of

1

1

1

1

1

1

1

Sound modules



**Loudspeaker connectors**  
Simple  
Stereo

Pack of 1

19563-2  
19563-4

COVER FOR MULTIMEDIA SOCKETS

POLAR WHITE  
61778

PLATINUM M.  
61778-PM

ANTHRACITE C.  
61778-AC

CHOCOLATE  
61778-CH

M. GOLD  
61778-DM

MATT WHITE  
61778-BM

MATT BLACK  
61778-NM

Pack of

1

1

1

1

1

1

1



**Volume control potentiometer**  
3 W, 27  $\Omega$ , mono

Pack of 1

61560  
61560-PM  
61560-AC  
61560-CH  
61560-DM  
61560-BM  
61560-NM

VOLUME CONTROL POTENTIOMETER

POLAR WHITE  
61560

PLATINUM M.  
61560-PM

ANTHRACITE C.  
61560-AC

CHOCOLATE  
61560-CH

M. GOLD  
61560-DM

MATT WHITE  
61560-BM

MATT BLACK  
61560-NM

Pack of

1

1

1

1

1

1


1



Temperature control


Room thermostat \*

Monitoring and control of temperature in closed rooms  
Type of sensor: Bi-metal Voltage: 230 V~; 24 V~, 50 Hz  
Changeover capacity at 230 Vac: 10(4) A, at 24 Vac: 1(1) A Setpoint range: 5 to 30 °C (numerical scale \* to 6)

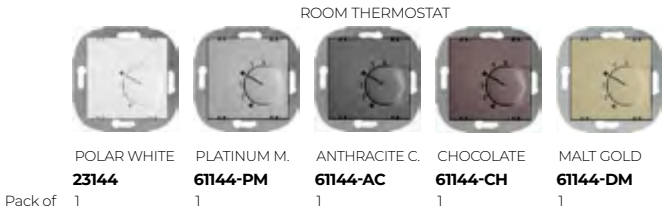


Heated floor, electronic thermostat

Electronic temperature control for heating systems, for example: electric heated floor systems, bathrooms, ceilings, marble and heated walls.  
Voltage: 230 V~, 50 Hz  
Sensor: external or internal & external (monitor).  
Floor sensor supplied with the package.  
Shut-off capacity: 16(2) A  
Range: 10 to 50 °C (scale of 1 to 5)  
Indications (LEDs): heating up (Network), and eco mode activated (green).  
Extension of the sensor: up to 50 m only with 0.5 mm2 cable, double insulated.  
Note: Ensure that the sensor cabling is protected by insulation. It is not possible to wire the sensor in parallel with AC power lines.

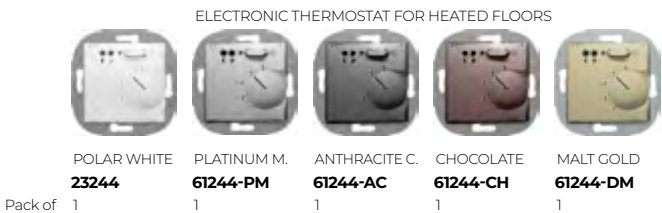

\*For Style they must be installed with the 55x55 mm mechanism

Adapter for 55x55mm mechanisms

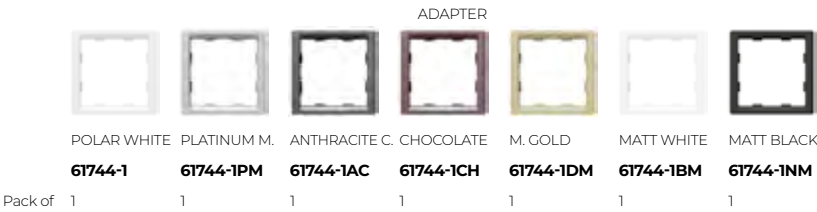

Motion detector



**Spherical motion detector 3-wire mechanism**  
Contact rating (3-wire, relay output): Resistive load 2,300 W, 10 A max., cos φ = 1  
Inductive load 1,500 W, 5 A max., cos φ = 0.6  
Halogen lamps with a 1000 VA transformer  
Electronic ballasts e.g. 2 x 36 W (20 max.)  
Compatible with LED loads

Pack of 1

\*For Style they must be installed with the 55x55 mm mechanism

Adapter for 55x55mm mechanisms




Buzzers and indicator lights




Buzzer module

· Polar White  
· Platinum Metallic  
· Carbon Metallic

230V  
Pack of 1

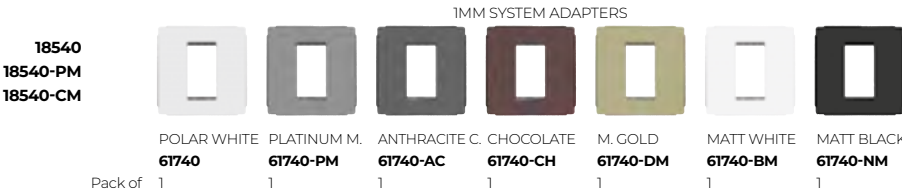


Assorted mechanisms



Cord operated push-button

Pack of 1

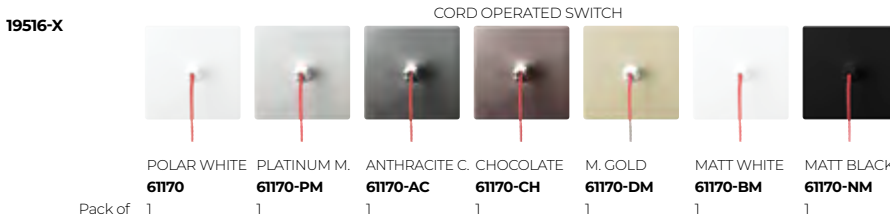


Cord operated changeover push-button

Pack of 1

Style blank cover



Style cable output  
Screwed terminals

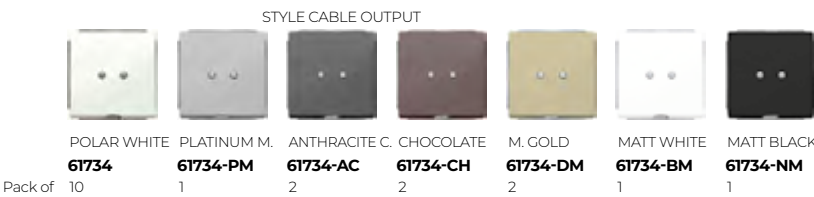

Style intermediate frames

For 51x51 mm mechanisms - For adapting mechanisms from other manufacturers

|                                                                                         |                                                                                   |                                                                                            |                                                                                   |                                                                                            |                                                                                     |                                                                                            |   |                                                                                            |   |                                                                                              |   |                                                                                              |   |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---|--------------------------------------------------------------------------------------------|---|----------------------------------------------------------------------------------------------|---|----------------------------------------------------------------------------------------------|---|
|        |  |           |  |          |  |         |   |                                                                                            |   |                                                                                              |   |                                                                                              |   |
| WHITE<br>POLAR                                                                          | PLATINUM<br>METALLIC                                                              | ANTHRACITE<br>COSSO                                                                        | CHOCOLATE                                                                         | GOLD<br>MALTA                                                                              | WHITE<br>MATE                                                                       | BLACK<br>MATE                                                                              |   |                                                                                            |   |                                                                                              |   |                                                                                              |   |
| Pack of                                                                                 | Pack of                                                                           | Pack of                                                                                    | Pack of                                                                           | Pack of                                                                                    | Pack of                                                                             | Pack of                                                                                    |   |                                                                                            |   |                                                                                              |   |                                                                                              |   |
|  61744 | 1                                                                                 |  61744-PM | 1                                                                                 |  61744-AC | 1                                                                                   |  61744-CH | 1 |  61744-DM | 1 |  61744-BM | 1 |  61744-NM | 1 |

For 55x55 mm mechanisms - suitable for 55x55 covers in the Miro series or other manufacturers' covers

|                                                                                           |                                                                                   |                                                                                             |                                                                                   |                                                                                             |                                                                                     |                                                                                             |   |                                                                                             |   |                                                                                               |   |                                                                                               |   |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---|---------------------------------------------------------------------------------------------|---|-----------------------------------------------------------------------------------------------|---|-----------------------------------------------------------------------------------------------|---|
|          |  |            |  |           |  |          |   |                                                                                             |   |                                                                                               |   |                                                                                               |   |
| WHITE<br>POLAR                                                                            | PLATINUM<br>METALLIC                                                              | ANTHRACITE<br>COSSO                                                                         | CHOCOLATE                                                                         | GOLD<br>MALTA                                                                               | WHITE<br>MATE                                                                       | BLACK<br>MATE                                                                               |   |                                                                                             |   |                                                                                               |   |                                                                                               |   |
| Pack of                                                                                   | Pack of                                                                           | Pack of                                                                                     | Pack of                                                                           | Pack of                                                                                     | Pack of                                                                             | Pack of                                                                                     |   |                                                                                             |   |                                                                                               |   |                                                                                               |   |
|  61744-1 | 1                                                                                 |  61744-1PM | 1                                                                                 |  61744-1AC | 1                                                                                   |  61744-1CH | 1 |  61744-1DM | 1 |  61744-1BM | 1 |  61744-1NM | 1 |

Style IP20 surface mounting box

|                                                                                     |                                                                                                                                                                          |                                              |                                                                                                                                        |                                                       |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
|  | <b>SURFACE MOUNTING BOX</b><br>· Polar White<br>– Single, 84 mm x 84 mm x 42.5 mm<br>– Double 155 mm x 84 mm x 42.5 mm<br>– Triple 226 mm x 84 mm x 42.5 mm<br>Pack of 1 | <b>61461</b><br><b>61462</b><br><b>61463</b> | · Platinum<br>– Single, 84 mm x 84 mm x 42.5 mm<br>– Double 155 mm x 84 mm x 42.5 mm<br>– Triple 226 mm x 84 mm x 42.5 mm<br>Pack of 1 | <b>61461-PM</b><br><b>61462-PM</b><br><b>61463-PM</b> |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|

Plastic inputs for Style IP20 surface-mounting boxes

|                                                                                     |                                                                                                 |              |                                                                                      |                                                                                    |              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------|
|  | <b>Cable grommets for trunking</b><br>(1 set contains 10 pcs)<br>· Polar White<br>Pack of 1 set | <b>61467</b> |  | <b>Cable grommets</b><br>(1 set contains 10 pcs)<br>· Polar White<br>Pack of 1 set | <b>61466</b> |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------|

Style Frames

|                                                                                           |                                                                                     |                                                                                              |                                                                                     |                                                                                              |                                                                                     |                                                                                              |   |                                                                                              |   |                                                                                              |    |                                                                                              |   |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|---|----------------------------------------------------------------------------------------------|---|----------------------------------------------------------------------------------------------|----|----------------------------------------------------------------------------------------------|---|
|        |  |           |  |           |  |           |   |                                                                                              |   |                                                                                              |    |                                                                                              |   |
| WHITE<br>POLAR                                                                            | PLATINUM<br>METALLIC                                                                | ANTHRACITE<br>COSSO                                                                          | CHOCOLATE                                                                           | GOLD<br>MALTA                                                                                | WHITE<br>MATE                                                                       | BLACK<br>MATE                                                                                |   |                                                                                              |   |                                                                                              |    |                                                                                              |   |
| Pack of                                                                                   | Pack of                                                                             | Pack of                                                                                      | Pack of                                                                             | Pack of                                                                                      | Pack of                                                                             | Pack of                                                                                      |   |                                                                                              |   |                                                                                              |    |                                                                                              |   |
|  61001 | 10                                                                                  |  61001-PM | 1                                                                                   |  61001-AC | 1                                                                                   |  61001-CH | 1 |  61001-DM | 1 |  61001-BM | 10 |  61001-NM | 1 |
|  61002 | 10                                                                                  |  61002-PM | 1                                                                                   |  61002-AC | 1                                                                                   |  61002-CH | 1 |  61002-DM | 1 |  61002-BM | 10 |  61002-NM | 1 |
|  61003 | 10                                                                                  |  61003-PM | 1                                                                                   |  61003-AC | 1                                                                                   |  61003-CH | 1 |  61003-DM | 1 |  61003-BM | 10 |  61003-NM | 1 |
|  61004 | 1                                                                                   |  61004-PM | 1                                                                                   |  61004-AC | 1                                                                                   |  61004-CH | 1 |  61004-DM | 1 |  61004-BM | 1  |  61004-NM | 1 |
|  61005 | 1                                                                                   |  61005-PM | 1                                                                                   |  61005-AC | 1                                                                                   |  61005-CH | 1 |  61005-DM | 1 |  61005-BM | 1  |  61005-NM | 1 |

The same frame type can be used for both horizontal and vertical mounting.

To install Style frames correctly in hollow partition walls, use the 2158000 hole saw (or equivalent) to ensure the flush-mounting box is flush with the wall.

MEASUREMENTS

|                                                                                       |             |
|---------------------------------------------------------------------------------------|-------------|
|    | 82 x 82 mm  |
|  | 82 x 153 mm |
|  | 82 x 224 mm |
|  | 82 x 295 mm |
|  | 82 x 366 mm |

Assorted material

|                                                                                       |                                                                                                        |                |                                                                                       |                                                                                          |                |                                                                                       |                                                                                                        |                |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------|
|  | <b>Universal linking mechanism</b><br>Thermoplastic material<br>Dimensions: 71x71x43 mm<br>Pack of 640 | <b>2373-1</b>  |  | <b>Protective cover</b><br>Allows you to locate the box after plastering<br>Pack of 1000 | <b>2374-1</b>  |  | <b>Claws for metal frames</b><br>Bag with 50 claws and 50 screws to assemble 25 fixing frames          | <b>16-GAR</b>  |
|  | <b>1-gang flush-mounting box for hollow partition walls</b><br>Pack of 120                             | <b>2341</b>    |  | <b>2-gang flush-mounting box for hollow partition walls</b><br>Pack of 60                | <b>2342</b>    |  | <b>3-gang flush-mounting box for hollow partition walls</b><br>Pack of 35                              | <b>2343</b>    |
|  | <b>4-gang flush-mounting box for hollow partition walls</b><br>Pack of 30                              | <b>2344</b>    |  | <b>5-gang flush-mounting box for hollow partition walls</b><br>Pack of 21                | <b>2345</b>    |  | <b>Hole saw with countersink for hollow partition walls</b><br>diam. 68 mm / depth. 40 mm<br>Pack of 1 | <b>2158000</b> |
|  | <b>Countersink for Ø 68 mm</b><br>Tool for flush installation of hollow wall boxes<br>Pack of 1        | <b>5892000</b> |  | <b>Replacement blades for ref. 5892000</b><br>Pack of 1                                  | <b>5893000</b> |  | <b>BJC fixing frame aligner</b><br>Pack of 1                                                           | <b>3201</b>    |

To achieve the designed installation results, the use of these boxes and a hole saw with countersink is recommended.



# BJC

## Miro

### Design that captivates

The Miro series draws on the style and influence of the late Bauhaus movement. Miro's lines exemplify an innovative and unique concept, something that can only be achieved when things are done properly. With its exclusive, modern textures, this high-quality series showcases exceptional finishes and meticulous attention to detail. The square shape, smooth surface and fine chrome-plated lines on the customised switches angles and materials create a harmonious whole that sets it apart, meeting and exceeding customers' high expectations in terms of quality, design and feel.



Aluminium




Crystal



Colour finish



Wood



Matt finish





# MEC 18

One single mechanism is suitable for all five luxury BJC series: Iris, Iris Plus, Mega, Style and Miro.

Its structure is ergonomically designed for easy, quick and hassle-free installation. Its compact mechanism makes use of all the space inside the flush-mounting box and facilitates cable routing. It is designed to ensure flawless installation.

- Our one-way and two-way 16A MEC18 switches allow many different applications with the same mechanism, reducing the number of items and references you need to stock.
- The galvanised steel fixing frames are treated to prevent corrosion, ensuring durable installation components.
- The fixing frames feature upper and lower profiles that facilitate assembly and ensure the mechanism is rigidly positioned.


The socket outlets feature safety protection and use standard STAI connectors - an open safety screw system. Just connect and tighten. The screws close with a single operation. Their engraved floating nut prevents the cable from slipping and guarantees a perfect fastening across the whole of the contact surface. The three conductors enter through the top of the socket outlet. They are also screwed onto one side of the socket outlet. Outlets and covers are supplied together but are not pre-assembled, which allows for quick and safe terminal connection and fastening.




Certifications



## The same mechanism for 5 different designs



MEC 18

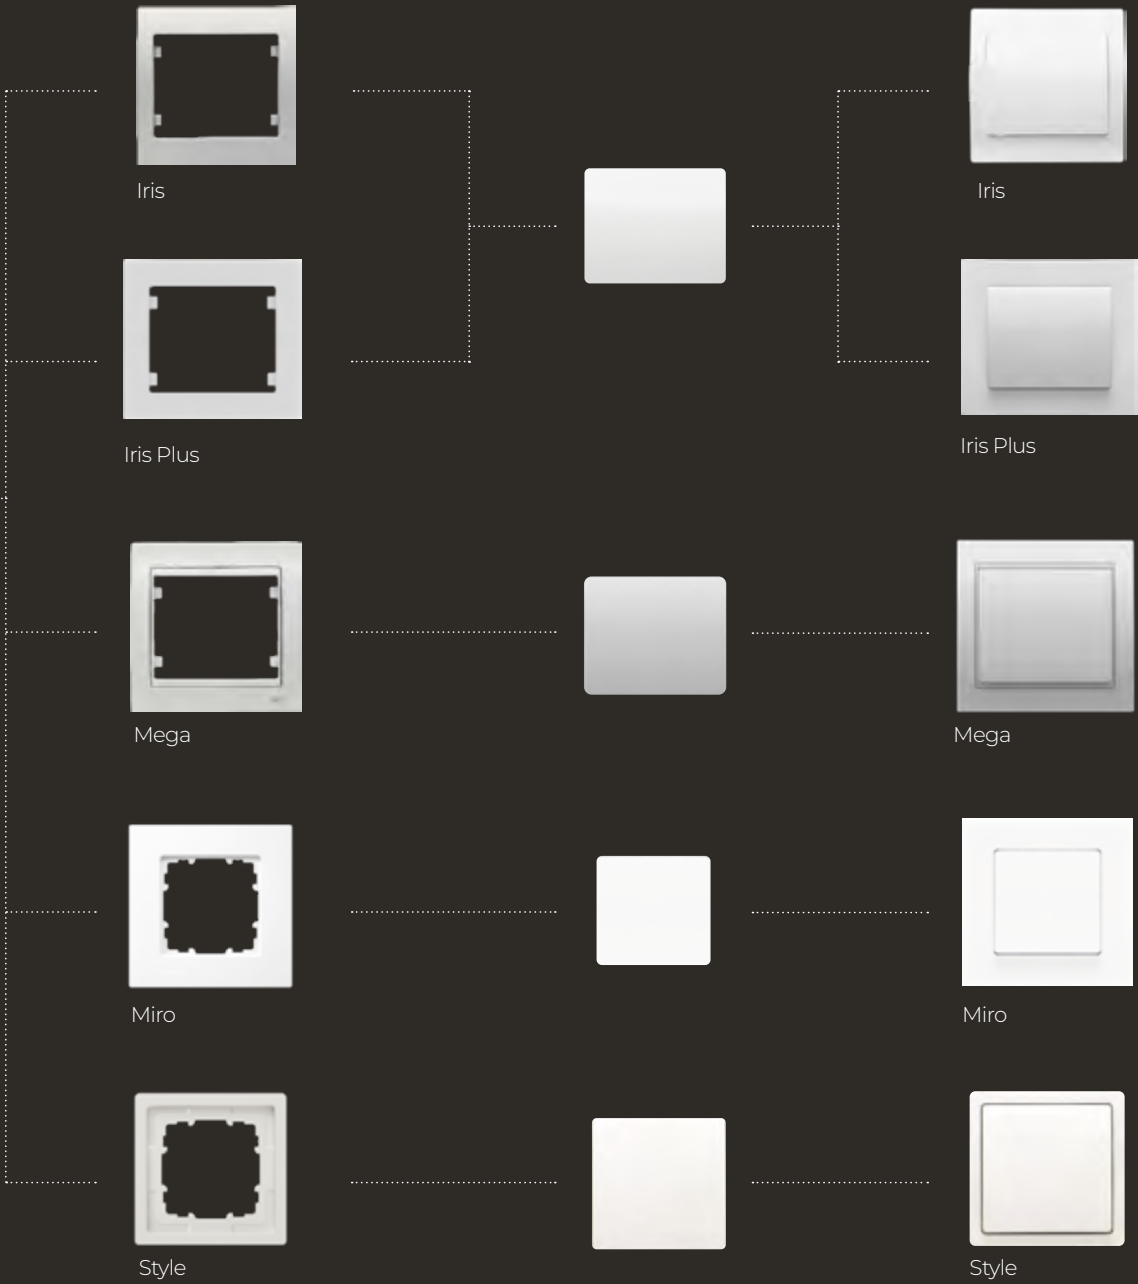


# A contemporary classic


Miro

- The floating frame seems to be suspended in mid-air, visual lightness.
- The frame is only 8 mm high.
- Square and compact switch diffuser, blue LED lighting.
- Solid and natural glass, wood and metal frames.
- Switches with or without an embellisher, to be chosen by the interior designer.


Matt colours

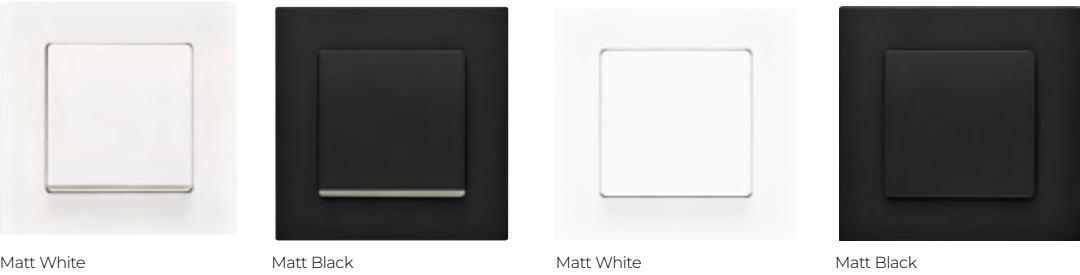


Crystal

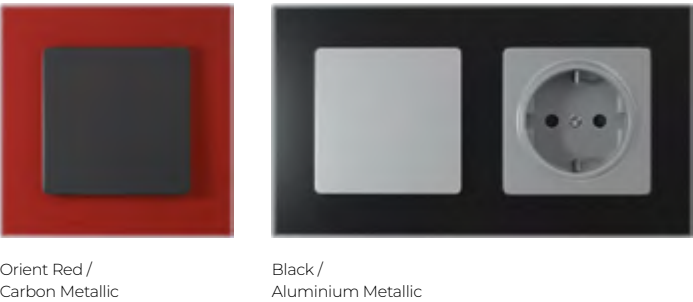


Wood

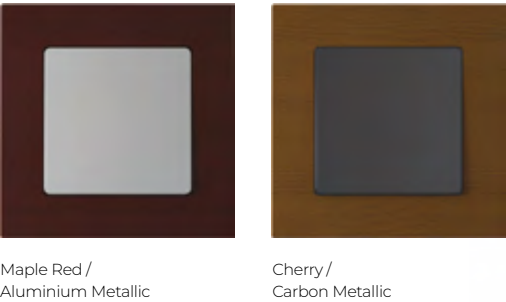

Aluminium



Colour





# Perfect in every detail

Miro's lines exemplify an innovative and unique concept, something that can only be achieved when things are done properly. This top-quality series boasts the perfect finish in every detail, with exclusive and modern textures.

 The floating frame seems to be suspended in mid air, visual lightness.

 Square and compact switch diffuser, blue LED lighting.

 Mechanisms connected to the BJC Nexus system.

 The frame is only 8 mm high.

 Switches with or without an embellisher, to be chosen by the interior designer.

“ The square shape and smooth surface create a harmonious whole that distinguishes and differentiates it.

# Miro IP44

Now also for outdoor use

- In all colours and frames.
- Schuko® socket outlet, single and double mechanism, TV and RJ.
- A single common IP20 frame from the same series.
- Uses the same IP20 screwless terminal mechanism.



IP44



Miro Metallic Aluminium  
IP44 push-button + IP44 TV (closed cover)



Miro polar white  
IP44 RJ (Cover open) + IP44 double one-way switch






# CONNECTED MIRO

With BJC Nexus, your home becomes part of you. BJC Nexus keeps the timeless look of the MIRO range: clean lines, refined surfaces, and a style that fits every home. But everything inside is brand new. Smarter electronics, smooth control, and full integration with the BJC Nexus app. So you don't have to choose between beauty and technology: now you can have both.

**BJC Nexus** connect with your home.

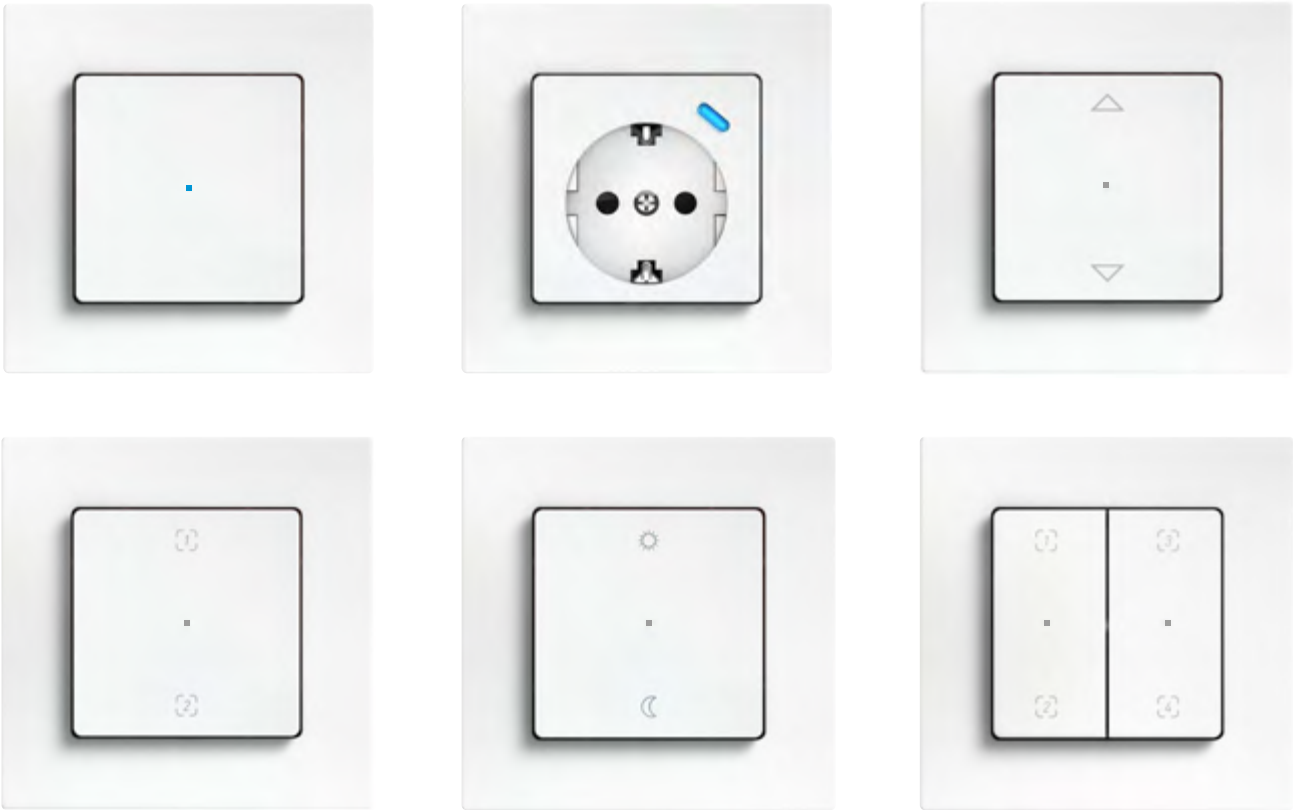

# Smart Home

**WIRELESS SYSTEM**  
Easy to install and convert existing systems without the need for wiring thanks to its wireless system.

**LOWER CONSUMPTION**  
BJC Nexus is an intelligent system designed for protection and energy efficiency.

**VERSATILE LOOK**  
Based on the Miro range with clean lines and refined surfaces, you'll have numerous styling options.

**FULL CONTROL**  
With BJC Nexus you can easily and efficiently control lights, blinds and sockets.

**FROM ANYWHERE**  
Control your home with the app, whether you are at home or anywhere else in the world.

**NO NEED FOR BUILDING WORK**  
The wireless push-buttons allow you to add a new light source control point without the need for building work.



# Many different functions

The Miro series offers a wide range of functions to meet today's needs. These include light intensity dimmers, sound controllers, and mechanisms for raising and lowering blinds. Choose whichever options you need for your total comfort and enjoy their appealing, colourful designs.



**Dimmers**  
Rotary and push-button dimmers, traditional and smart. Dimmers are the perfect way to create an atmosphere in rooms by adjusting the lighting levels to the desired intensity.



**Dual USB chargers**  
The Schuko® socket outlet with dual USB Type A and Type C allows you to charge two terminals simultaneously while leaving the actual socket free for use. Quick and easy installation in a standard flush-mounting box.

- Power Delivery (required by the EU from 2024)
- Quick charge
- For standard flush-mounting boxes



**Multimedia**  
Multimedia connectors are the perfect solution to prevent exposed wiring during installation and for the distribution of electronic devices in any type of installation; whether residential or commercial. The HDMI, RJ45, stereo cable and other outputs can provide separate input and output sources, for efficient connections and uncluttered installations.



**Smart mechanisms**  
Easily control room lighting from your smartphone or create scenes automatically based on the time of day.




**RJ and fibre-optic sockets**  
This allows the fibre-optic cable to reach the required location and enables the router to be easily connected.



**Centralised blind control**  
Control your motorised blinds as a whole or by zones, using traditional systems or smart connected systems if you want to control them from your smartphone or set timers.


# 16 A in Mec switches

The switches feature a powerful 16 A device with an automatic terminal connection. Their ergonomic design ensures comfortable, easy and safe handling.

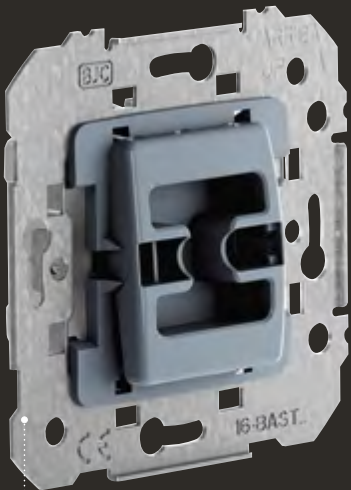

**Mechanism**

The Mec 18 mechanism can be adapted to Iris, Iris Plus, Mega, Miro and Style products for your convenience.

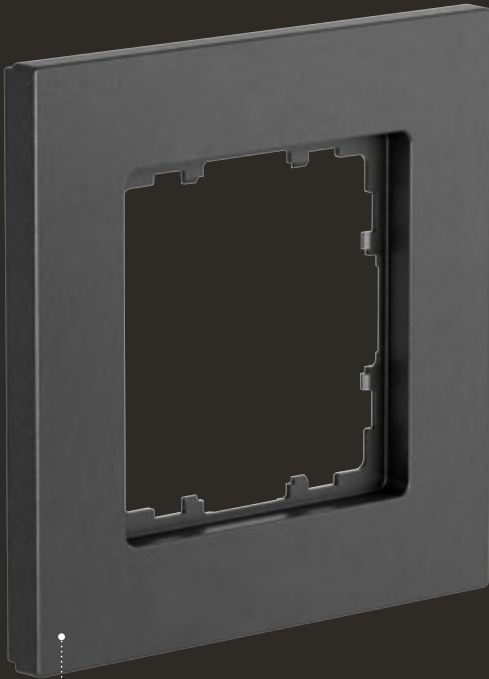

**Frame**

Select and long-lasting materials. Exclusive and high-quality finishes.



**Switch**

Accurate operation. Smooth and comfortable to the touch.

Reference table for composing basic functions - Miro

|                                                    | Polar White |              | Aluminium Metallic |               | Carbon Metallic |               | Matt White |               | Matt Black |               |
|----------------------------------------------------|-------------|--------------|--------------------|---------------|-----------------|---------------|------------|---------------|------------|---------------|
| Function                                           | Mechanism   | Switch/Cover | Mechanism          | Switch/Cover  | Mechanism       | Switch/Cover  | Mechanism  | Switch/Cover  | Mechanism  | Switch/Cover  |
| One-way switch                                     | 18505       | 59705        | 18505              | 59705-AM      | 18505           | 59705-CM      | 18505      | 59705-BM      | 18505      | 59705-NM      |
| Two-way switch                                     | 18506       | 59705        | 18506              | 59705-AM      | 18506           | 59705-CM      | 18506      | 59705-BM      | 18506      | 59705-NM      |
| Intermediate switch                                | 18507       | 59705        | 18507              | 59705-AM      | 18507           | 59705-CM      | 18507      | 59705-BM      | 18507      | 59705-NM      |
| Double one-way switch                              | 18509       | 59709        | 18509              | 59709-AM      | 18509           | 59709-CM      | 18509      | 59709-BM      | 18509      | 59709-NM      |
| Double two-way switch                              | 18510       | 59709        | 18510              | 59709-AM      | 18510           | 59709-CM      | 18510      | 59709-BM      | 18510      | 59709-NM      |
| Push-button, bell symbol                           | 18516       | 59716        | 18516              | 59716-AM      | 18516           | 59716-CM      | 18516      | 59716-BM      | 18516      | 59716-NM      |
| Push-button, bulb symbol                           | 18516       | 59717        | 18516              | 59717-AM      | 18516           | 59717-CM      | 18516      | 59717-BM      | 18516      | 59717-NM      |
| Rotary dimmer                                      | 21550-X     | 59749        | 21550-X            | 59749-AM      | 21550-X         | 59749-CM      | 21550-X    | 59749-BM      | 21550-X    | 59749-NM      |
| Schuko® socket outlet                              | 18524       | 59724        | 18524              | 59724-AM      | 18524           | 59724-CM      | 18524      | 59724-BM      | 18524      | 59724-NM      |
| Schuko® socket outlet + dual USB Type A and Type C | 18524-USBC  | 59724-USBC   | 18524-USBC         | 59724-USBC-AM | 18524-USBC      | 59724-USBC-CM | 18524-USBC | 59724-USBC-BM | 18524-USBC | 59724-USBC-NM |
| TV cover                                           | 59330       |              | 59330-AM           |               | 59330-CM        |               | 59330-BM   |               | 59330-NM   |               |
| Single RJ socket outlet                            | 19582-1     | 59782        | 19582-1            | 59782-AM      | 19582-1         | 59782-CM      | 19582-1    | 59782-BM      | 19582-1    | 59782-NM      |
| Double RJ socket outlet                            | 19682-1     | 59882        | 19682-1            | 59882-AM      | 19682-1         | 59882-CM      | 19682-1    | 59882-BM      | 19682-1    | 59882-NM      |
| Blank cover                                        | 59033       |              | 59033-AM           |               | 59033-CM        |               | 59033-BM   |               | 59033-NM   |               |
| Cable output                                       | 59734       |              | 59734-AM           |               | 59734-CM        |               | 59734-BM   |               | 59734-NM   |               |
| Buzzer                                             | 18540       | 59740        | 18540-AM           | 59740-AM      | 18540-CM        | 59740-CM      | 18540      | 59740-BM      | 18540-CM   | 59740-NM      |
| Key card switch                                    | 59068       |              | 59068-AM           |               | 59068-CM        |               | 59068-BM   |               | 59068-NM   |               |
| Frame                                              | 59001       |              | 59001-AM           |               | 59001-CM        |               | 59001-BM   |               | 59001-NM   |               |



Connect with your home

Smart Home

MIRO combines all your home devices in one ecosystem. Control it with the app, create scenes, or let the system adapt automatically to your routines.

Your home awakens

On weekdays, BJC Nexus raises the blinds in my rooms first thing in the morning. Waking up gradually to natural light is wonderful.

Control your sockets with a single click


Now I can be sure that my kids aren't playing with their console when they're not supposed to. I've programmed the sockets in the living room to be switched off when it's not playtime.

Romantic or lively?

With the scene system, you can create different atmospheres by combining lighting and connected devices such as music players.

Have I forgotten to turn off a light?

Did I forget to turn off a light? I can check on the app from my office or I can simply activate the scene that turns off all the lights and relax.



Reference table for composing connected Miro

Polar White Aluminium Metallic Carbon Metallic Matt White Matt Black

Smart flush-mounted mechanisms

| Function                            | Mechanism | Switch/Cover without embellisher | Switch/Cover with embellisher | Switch/Cover without embellisher | Switch/Cover with embellisher | Switch/Cover without embellisher | Switch/Cover with embellisher | Switch/Cover without embellisher | Switch/Cover with embellisher | Switch/Cover without embellisher | Switch/Cover with embellisher |
|-------------------------------------|-----------|----------------------------------|-------------------------------|----------------------------------|-------------------------------|----------------------------------|-------------------------------|----------------------------------|-------------------------------|----------------------------------|-------------------------------|
| Connected two-way switch            | NX18506   | SM59705                          | SM59705-C                     | SM59705-AM                       | SM59705-AMC                   | SM59705-CM                       | SM59705-CMC                   | SM59705-BM                       | SM59705-BMC                   | SM59705-NM                       | SM59705-NMC                   |
| Connected dimmer                    | NX21545   | SM59705                          | SM59705-C                     | SM59705-AM                       | SM59705-AMC                   | SM59705-CM                       | SM59705-CMC                   | SM59705-BM                       | SM59705-BMC                   | SM59705-NM                       | SM59705-NMC                   |
| Connected one-way switch for blinds | NX18565   | SM59765                          | SM59765-C                     | SM59765-AM                       | SM59765-AMC                   | SM59765-CM                       | SM59765-CMC                   | SM59765-BM                       | SM59765-BMC                   | SM59765-NM                       | SM59765-NMC                   |
| Connected Schuko® socket outlet     | NX18524   | SM59724                          | -                             | SM59724-AM                       | -                             | SM59724-CM                       | -                             | SM59724-BM                       | -                             | SM59724-NM                       | -                             |

Smart flush-mounted mechanisms (with frame (\*) and switch in Polar White) (available in other colours when purchasing the cover and frame separately)

| Function                            | Mechanism with frame (*) and switch in Polar White |
|-------------------------------------|----------------------------------------------------|
| Connected two-way switch            | NX59906                                            |
| Connected dimmer                    | NX59949                                            |
| Connected one-way switch for blinds | NX59965                                            |
| Connected Schuko® socket outlet     | NX59924                                            |

Surface push-buttons (battery powered) (with frame (\*) and switch in Polar White) (available in other colours when purchasing the cover and frame separately)

| Function                                       | Mechanism with frame (*) and switch in Polar White | Scene switches Polar White |                  | Scene switches Aluminium Metallic |                  | Scene switches Carbon Metallic |                  | Scene switches Matt White |                  | Scene switches Matt Black |                  |
|------------------------------------------------|----------------------------------------------------|----------------------------|------------------|-----------------------------------|------------------|--------------------------------|------------------|---------------------------|------------------|---------------------------|------------------|
| Single 2-button wireless connected push-button | NX59939                                            |                            |                  | SM59739-AM                        | -                | SM59739-CM                     | -                | SM59739-BM                | -                | SM59739-NM                | -                |
|                                                |                                                    | SM59739-1                  | "I-2" symbol     | SM59739-1AM                       | "I-2" symbol     | SM59739-1CM                    | "I-2" symbol     | SM59739-1BM               | "I-2" symbol     | SM59739-1NM               | "I-2" symbol     |
|                                                |                                                    | SM59739-2                  | "D-N" symbol     | SM59739-2AM                       | "D-N" symbol     | SM59739-2CM                    | "D-N" symbol     | SM59739-2BM               | "D-N" symbol     | SM59739-2NM               | "D-N" symbol     |
|                                                |                                                    | SM59739-3                  | "I-O" symbol     | SM59739-3AM                       | "I-O" symbol     | SM59739-3CM                    | "I-O" symbol     | SM59739-3BM               | "I-O" symbol     | SM59739-3NM               | "I-O" symbol     |
| Double 4-button wireless push-button           | NX59940                                            |                            |                  | SM59740-AM                        | -                | SM59740-CM                     | -                | SM59740-BM                | -                | SM59740-NM                | -                |
|                                                |                                                    | SM59740-1                  | "I-2-3-4" symbol | SM59740-1AM                       | "I-2-3-4" symbol | SM59740-1CM                    | "I-2-3-4" symbol | SM59740-1BM               | "I-2-3-4" symbol | SM59740-1NM               | "I-2-3-4" symbol |





(\*) 1-gang frame, see pages 166 and 167 for frames with more gangs.


Switch mechanisms



**Single pole one-way switch** 18505\*  
**Two-way switch** 18506\*  
16 A 250 V~  
**Intermediate switch** 18507\*  
10 A 250 V~

Pack of 10



| SWITCH                                                                            |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE                                                                       | METALLIC ALUMINIUM                                                                 | CARBON METALLIC                                                                     | MATT WHITE                                                                          | MATT BLACK                                                                          |
| 59705                                                                             | 59705-AM                                                                           | 59705-CM                                                                            | 59705-BM                                                                            | 59705-NM                                                                            |
| 10                                                                                | 10                                                                                 | 10                                                                                  | 1                                                                                   | 1                                                                                   |
| with bright chrome embellisher                                                    |                                                                                    |                                                                                     | with matt nickel embellisher                                                        |                                                                                     |
| 59705-C                                                                           | 59705-AMC                                                                          | 59705-CMC                                                                           | 59705-BMC                                                                           | 59705-NMC                                                                           |
| 10                                                                                | 10                                                                                 | 10                                                                                  | 1                                                                                   | 1                                                                                   |
| SWITCH WITH A DIFFUSER                                                            |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|  |  |  |  |  |
| POLAR WHITE                                                                       | METALLIC ALUMINIUM                                                                 | CARBON METALLIC                                                                     | MATT WHITE                                                                          | MATT BLACK                                                                          |
| 59705-L                                                                           | 59705-AML                                                                          | 59705-CML                                                                           | 59705-BML                                                                           | 59705-NML                                                                           |
| 10                                                                                | 2                                                                                  | 2                                                                                   | 1                                                                                   | 1                                                                                   |
| with bright chrome embellisher                                                    |                                                                                    |                                                                                     | with matt nickel embellisher                                                        |                                                                                     |
| 59705-CL                                                                          | 59705-AMCL                                                                         | 59705-CMCL                                                                          | 59705-BMCL                                                                          | 59705-NMCL                                                                          |
| 10                                                                                | 2                                                                                  | 2                                                                                   | 1                                                                                   | 1                                                                                   |



**Single pole one-way switch with control light** 18605\*  
**Two-way switch with control light** 18606\*  
**Two-way switch with indicator light** 18506-L\*  
16 A 250 V~

Pack of 10



Indicator lamp incorporated in reference 18506-L

| SWITCH WITH A DIFFUSER                                                              |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE                                                                         | METALLIC ALUMINIUM                                                                   | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
| 59705-L                                                                             | 59705-AML                                                                            | 59705-CML                                                                             | 59705-BML                                                                             | 59705-NML                                                                             |
| 10                                                                                  | 2                                                                                    | 2                                                                                     | 1                                                                                     | 1                                                                                     |
| with bright chrome embellisher                                                      |                                                                                      |                                                                                       | with matt nickel embellisher                                                          |                                                                                       |
| 59705-CL                                                                            | 59705-AMCL                                                                           | 59705-CMCL                                                                            | 59705-CBMCL                                                                           | 59705-NMCL                                                                            |
| 10                                                                                  | 2                                                                                    | 2                                                                                     | 1                                                                                     | 1                                                                                     |



**2 pole one-way switch** 18508\*  
**2 pole one-way switch with control light** 18608\*  
16 A 250 V~  
Only switches with indicator light  
Pack of 10

Indicator lamp incorporated in reference 18608

| SWITCH WITH I / O                                                                   |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE                                                                         | METALLIC ALUMINIUM                                                                   | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
| 59708                                                                               | 59708-AM                                                                             | 59708-CM                                                                              | 59708-BM                                                                              | 59708-NM                                                                              |
| 2                                                                                   | 2                                                                                    | 2                                                                                     | 1                                                                                     | 1                                                                                     |
| with bright chrome embellisher                                                      |                                                                                      |                                                                                       | with matt nickel embellisher                                                          |                                                                                       |
| 59708-C                                                                             | 59708-AMC                                                                            | 59708-CMC                                                                             | 59708-BMC                                                                             | 59708-NMC                                                                             |
| 2                                                                                   | 2                                                                                    | 2                                                                                     | 1                                                                                     | 1                                                                                     |
| SWITCH WITH I/O SYMBOLS AND DIFFUSER                                                |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|  |  |  |  |  |
| POLAR WHITE                                                                         | METALLIC ALUMINIUM                                                                   | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
| 59708-L                                                                             | 59708-AML                                                                            | 59708-CML                                                                             | 59708-BML                                                                             | 59708-NML                                                                             |
| 2                                                                                   | 2                                                                                    | 2                                                                                     | 1                                                                                     | 1                                                                                     |
| with bright chrome embellisher                                                      |                                                                                      |                                                                                       | with matt nickel embellisher                                                          |                                                                                       |
| 59708-CL                                                                            | 59708-AMCL                                                                           | 59708-CMCL                                                                            | 59708-BMCL                                                                            | 59708-NMCL                                                                            |
| 2                                                                                   | 2                                                                                    | 2                                                                                     | 1                                                                                     | 1                                                                                     |




\* The Miro and Style series are compatible with MEC18 mechanisms manufactured from January 2017 onwards.

Switch mechanisms



**Double one-way switch** 18509\*  
**Double two-way switch** 18510\*  
16 A 250 V~  
**Double push-button** 18511\*  
10 A 250 V~  
**Double normally-closed push-button** 18513\*  
10 A 250 V~


Pack of 10


| DOUBLE SWITCH                                                                       |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE                                                                         | METALLIC ALUMINIUM                                                                  | CARBON METALLIC                                                                     | MATT WHITE                                                                          | MATT BLACK                                                                          |
| 59709                                                                               | 59709-AM                                                                            | 59709-CM                                                                            | 59709-BM                                                                            | 59709-NM                                                                            |
| 10                                                                                  | 10                                                                                  | 10                                                                                  | 1                                                                                   | 1                                                                                   |
| with bright chrome embellisher                                                      |                                                                                     |                                                                                     | with matt nickel embellisher                                                        |                                                                                     |
| 59709-C                                                                             | 59709-AMC                                                                           | 59709-CMC                                                                           | 59709-BMC                                                                           | 59709-NMC                                                                           |
| 10                                                                                  | 10                                                                                  | 10                                                                                  | 1                                                                                   | 1                                                                                   |
| DOUBLE SWITCH WITH A DIFFUSER                                                       |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|  |  |  |  |  |
| POLAR WHITE                                                                         | METALLIC ALUMINIUM                                                                  | CARBON METALLIC                                                                     | MATT WHITE                                                                          | MATT BLACK                                                                          |
| 59709-L                                                                             | 59709-AML                                                                           | 59709-CML                                                                           | 59709-BML                                                                           | 59709-NML                                                                           |
| 10                                                                                  | 2                                                                                   | 2                                                                                   | 1                                                                                   | 1                                                                                   |
| with bright chrome embellisher                                                      |                                                                                     |                                                                                     | with matt nickel embellisher                                                        |                                                                                     |
| 59709-CL                                                                            | 59709-AMCL                                                                          | 59709-CMCL                                                                          | 59709-BMCL                                                                          | 59709-NMCL                                                                          |
| 10                                                                                  | 2                                                                                   | 2                                                                                   | 1                                                                                   | 1                                                                                   |

**Double push-button with lamp** 18511-L\*  
10 A 250 V~

Pack of 10


Indicator lamp incorporated in reference 18511-L

| DOUBLE SWITCH WITH A DIFFUSER                                                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE                                                                           | METALLIC ALUMINIUM                                                                    | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
| 59709-L                                                                               | 59709-AML                                                                             | 59709-CML                                                                             | 59709-BML                                                                             | 59709-NML                                                                             |
| 10                                                                                    | 2                                                                                     | 2                                                                                     | 1                                                                                     | 1                                                                                     |
| with bright chrome embellisher                                                        |                                                                                       |                                                                                       | with matt nickel embellisher                                                          |                                                                                       |
| 59709-CL                                                                              | 59709-AMCL                                                                            | 59709-CMCL                                                                            | 59709-BMCL                                                                            | 59709-NMCL                                                                            |
| 10                                                                                    | 2                                                                                     | 2                                                                                     | 1                                                                                     | 1                                                                                     |



**Two-way switch + Push-button** 18515\*  
16 A + 10 A 250 V~

Pack of 10

| DOUBLE TWO-WAY PUSH-BUTTON SWITCH WITH BELL SYMBOL                                    |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE                                                                           | METALLIC ALUMINIUM                                                                    | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
| 59715                                                                                 | 59715-AM                                                                              | 59715-CM                                                                              | 59715-BM                                                                              | 59715-NM                                                                              |
| 2                                                                                     | 2                                                                                     | 2                                                                                     | 1                                                                                     | 1                                                                                     |
| with bright chrome embellisher                                                        |                                                                                       |                                                                                       | with matt nickel embellisher                                                          |                                                                                       |
| 59715-C                                                                               | 59715-AMC                                                                             | 59715-CMC                                                                             | 59715-BMC                                                                             | 59715-NMC                                                                             |
| 2                                                                                     | 2                                                                                     | 2                                                                                     | 1                                                                                     | 1                                                                                     |

\* The Miro and Style series are compatible with MEC18 mechanisms manufactured from January 2017 onwards.

Push-button mechanism



**Push-button** **18516\***  
**Normally-closed push-button 18512\***

Pack of 10

Note:  
Engraving of picto-  
grams on request



POLAR WHITE METALLIC ALUMINIUM CARBON METALLIC MATT WHITE MATT BLACK

|         |                                                                                   |                |                  |                  |                              |                  |
|---------|-----------------------------------------------------------------------------------|----------------|------------------|------------------|------------------------------|------------------|
|         |  | <b>59716</b>   | <b>59716-AM</b>  | <b>59716-CM</b>  | <b>59716-BM</b>              | <b>59716-NM</b>  |
| Pack of |                                                                                   | 10             | 10               | 10               | 1                            | 1                |
|         |  | <b>59717</b>   | <b>59717-AM</b>  | <b>59717-CM</b>  | <b>59717-BM</b>              | <b>59717-NM</b>  |
| Pack of |                                                                                   | 10             | 10               | 10               | 1                            | 1                |
|         | with bright chrome embellisher                                                    |                |                  |                  | with matt nickel embellisher |                  |
|         |  | <b>59716-C</b> | <b>59716-AMC</b> | <b>59716-CMC</b> | <b>59716-BMC</b>             | <b>59716-NMC</b> |
| Pack of |                                                                                   | 10             | 10               | 10               | 1                            | 1                |
|         |  | <b>59717-C</b> | <b>59717-AMC</b> | <b>59717-CMC</b> | <b>59717-BMC</b>             | <b>59717-NMC</b> |
| Pack of |                                                                                   | 10             | 10               | 10               | 1                            | 1                |



POLAR WHITE METALLIC ALUMINIUM CARBON METALLIC MATT WHITE MATT BLACK

|         |    | ALUMINUM                       |                   | METAL             |                              |                   |
|---------|-------------------------------------------------------------------------------------|--------------------------------|-------------------|-------------------|------------------------------|-------------------|
|         |                                                                                     | <b>59716-L</b>                 | <b>59716-AML</b>  | <b>59716-CML</b>  | <b>59716-BML</b>             | <b>59716-NML</b>  |
| Pack of |                                                                                     | 10                             | 2                 | 2                 | 1                            | 1                 |
|         |  | ALUMINUM                       |                   | METAL             |                              |                   |
|         |                                                                                     | <b>59717-L</b>                 | <b>59717-AML</b>  | <b>59717-CML</b>  | <b>59717-BML</b>             | <b>59717-NML</b>  |
| Pack of |                                                                                     | 10                             | 10                | 10                | 1                            | 1                 |
|         |                                                                                     | with bright chrome embellisher |                   |                   | with matt nickel embellisher |                   |
|         |  | <b>59716-CL</b>                | <b>59716-AMCL</b> | <b>59716-CMCL</b> | <b>59716-BMCL</b>            | <b>59716-NMCL</b> |
| Pack of |                                                                                     | 10                             | 2                 | 2                 | 1                            | 1                 |
|         |  | <b>59717-CL</b>                | <b>59717-AMCL</b> | <b>59717-CMCL</b> | <b>59717-BMCL</b>            | <b>59717-NMCL</b> |
| Pack of |                                                                                     | 10                             | 10                | 10                | 1                            | 1                 |



**Multifunction tablet timer switch**  
9 functions  
Power supply voltage 230V 50-60Hz  
4-wire  
With neutral  
Compatible with R, L and C loads

Pack of 1

**TMP-3H**



**Multifunction tablet timer switch**  
Screwless terminal  
Power supply voltage 230V 50-60Hz  
4-wire  
Compatible with R, L and C loads

Pack of 1

**TMP-4H**

Key card switch



**Key card switch with lighted labelling field**  
- Mechanical operation, 1 push-button, normally-open with separated neutral terminal.  
- For key cards up to 54x65 mm and 0.7-1.0 mm thick.  
- 230Vac 10A  
- Supplied with bulb (19039-AZ) for indicator light.



POLAR WHITE METALLIC ALUMINIUM CARBON METALLIC MATT WHITE MATT BLACK

**59068** **59068-AM** **59068-CM** **59068-BM** **59068-NM**

Pack of

1 1 1 1 1

**Bulb** **19039-AZ**

Spare part for key card switch

Pack of 1

Indicator lights



**Blue LED indicator light** **18039-1AZ**

230 V~  
Indicator lights for 2 pole one-way switches and single pole one-way switches with control light  
Wide switch

18039-1AZ Pack of 5



**Blue LED indicator light** **18039-2AZ**

230 V~  
Indicator lights for one-way and two-way and intermediate switches and push-buttons  
Wide switch

18039-2AZ Pack of 10



**Blue LED indicator light** **18039-3AZ**

230 V~  
Indicator lights for all the different kinds of mechanisms  
Narrow rocker

18039-3AZ Pack of 10



**Load for indicator lights with energy saving and fluorescent lamps** **3139**

Pack of 1

Blinds control



**Double push-button for blinds** **18565\***  
**Double one-way switch for blinds** **18569\***

With electrical and mechanical interlocking device  
10 A 250 V~

Pack of 10



POLAR WHITE METALLIC ALUMINIUM CARBON METALLIC MATT WHITE MATT BLACK

**59765** **59765-AM** **59765-CM** **59765-BM** **59765-NM**

Pack of

10 2 2 1 1

**Double push-button** **18511\***

Requires auxiliary device specific to each blind manufacturer  
No interlocking device  
10 A 250 V~

Pack of 10

with bright chrome embellisher

with matt nickel embellisher

**59765-C** **59765-AMC** **59765-CMC** **59765-BMC** **59765-NMC**

Pack of

10 2 2 1 1

\* The Miro and Style series are compatible with MEC18 mechanisms manufactured from January 2017 onwards.



**Blind controller for installation in a flush-mounting box** **2393**

Blind control (insert) for 230 V single-phase motors  
Max power: 1250 VA  
Local or centralised operation  
Operation adjustable from 1 to 120 sec.  
For installation with double push-buttons (18511)

Pack of 1

\* The Miro and Style series are compatible with MEC18 mechanisms manufactured from January 2017 onwards.



Dimmers



**A two-way dimmer for high- and low-voltage LED, incandescent and halogen lamps with a magnetic transformer**

Power supply: 230 V / 50 Hz  
LED: 230V 3-85W  
Direct halogens: 20-250W  
Halogens with a ferromagnetic transformer: 20-250VA  
Fuse: T2AH/250V  
Screw connection  
Phase shut-off: Leading-Edge  
Pack of 1

21550-X

COVER AND BUTTON

|                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE<br><b>59749</b>                                                       | METALLIC ALUMINIUM<br><b>59749-AM</b>                                              | CARBON METALLIC<br><b>59749-CM</b>                                                  | MATT WHITE<br><b>59749-BM</b>                                                       | MATT BLACK<br><b>59749-NM</b>                                                       |
| Pack of 1                                                                         | 1                                                                                  | 1                                                                                   | 1                                                                                   | 1                                                                                   |



**A two-way dimmer for high- and low-voltage incandescent and halogen lamps with a magnetic transformer**

Power supply: 230VAC / 50Hz  
Halogens with a ferromagnetic transformer: 20-500VA  
Direct halogens: 20-500W  
Fuse: T2AH/250V  
Screw connection  
Phase shut-off: Leading-Edge  
Pack of 1

21553-X



**Device for controlling luminaires with 1-10V fluorescence regulation**

Power supply: 230VAC 50-60Hz  
Control voltage: 1-12V  
Maximum control current: 40mA  
Load connection: 10A  
Fuse: F0.8/250V  
Screw connection  
Pack of 1

21555-X

Dimmers for push-buttons



**Universal tablet dimmer with load adjustment**

R, L, C, LED, ESL  
Power supply voltage 230V - 50/60Hz  
Consumption: 3W  
Suitable for 230V halogen lamps, halogen lamps with ferromagnetic trans, halogen lamps with electronic trans. and LED loads 230 V

DIP-RLC

Pack of 1

Load connection

| LOAD TYPE |  Mechanism type |  230 V halogen lamps |  Low voltage halogens 12 V (R) with a ferromagnetic transformer (L) |  Low voltage halogens lamps with electronic transformer (C) |  LED Load 230 V |  LED Strips, monochrome (12-48 VDC) |  Dimmable Compact Fluorescent Lamps (CFLs) |  Electronic ballast with 1-10 V regulation input |
|-----------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| 21553-X   | Rotary                                                                                             | 20-500W                                                                                                 | 20-500 VA                                                                                                                                              | NO                                                                                                                                             | NO                                                                                                 | NO                                                                                                                      | NO                                                                                                                              | NO                                                                                                                                    |
| 21555-X   | Rotary                                                                                             | NO                                                                                                      | NO                                                                                                                                                     | NO                                                                                                                                             | NO                                                                                                 | NO                                                                                                                      | NO                                                                                                                              | 1-10 V                                                                                                                                |
| 21550-X   | Rotary                                                                                             | 20-250W                                                                                                 | 20-250 VA                                                                                                                                              | NO                                                                                                                                             | 3-85W                                                                                              | NO                                                                                                                      | NO                                                                                                                              | NO                                                                                                                                    |
| DIP-RLC   | Push-button                                                                                        | 160W                                                                                                    | 160 VA                                                                                                                                                 | 160W                                                                                                                                           | 50-160W                                                                                            | NO                                                                                                                      | 160W                                                                                                                            | NO                                                                                                                                    |

A list of compatibility-tested LED lamps is available at [www.bjc.es/documentation](http://www.bjc.es/documentation)

Socket outlets with safety protection



**Schuko® socket outlet (lateral earthing) with safety protection**

Screwed terminals 16 A 250 V~

18524

Pack of 10

SOCKET OUTLET COVERS (SCHUKO)

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE<br><b>59724</b>                                                         | METALLIC ALUMINIUM<br><b>59724-AM</b>                                               | CARBON METALLIC<br><b>59724-CM</b>                                                  | MATT WHITE<br><b>59724-BM</b>                                                       | MATT BLACK<br><b>59724-NM</b>                                                       |
| Pack of 10                                                                          | 10                                                                                  | 10                                                                                  | 1                                                                                   | 1                                                                                   |



**2P-E Schuko® socket outlet with dual USB type A and type C charger, with fast charging capacity and Power Delivery**

Schuko® socket outlet  
- 230Vac 50Hz, 16A  
- Screwless terminal  
Dual USB charger:  
- 1 USB type A socket and 1 USB type C socket  
- Maximum power: 20W  
- Quick charge Power Delivery USB C: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
Quick charge USB A: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Normal charge:  
  · 5V/3.4A when using USB A and USB C at the same time  
  · 5V/2.4A when using USB A or USB C individually  
- Short circuit protection  
- Temperature protection  
Compliant with UNE 20315-1-1/1-2 and EN 62368-1 standards

18524-USBC

Pack of 1

PLUG COVERS WITH SAFETY PROTECTION

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| POLAR WHITE<br><b>59724-USBC</b>                                                    | METALLIC ALUMINIUM<br><b>59724-US-BC-AM</b>                                         | CARBON METALLIC<br><b>59724-US-BC-CM</b>                                            | MATT WHITE<br><b>59724-US-BC-BM</b>                                                 | MATT BLACK<br><b>59724-US-BC-NM</b>                                                 |
| Pack of 1                                                                           | 1                                                                                   | 1                                                                                   | 1                                                                                   | 1                                                                                   |



**Schuko® socket outlet with screwless terminal with claws**

**Schuko® socket outlet with screwless terminal without claws**

Screwless  
Screwless terminal for 2.5 mm flexible or rigid conductors

19532-X

19532

Pack of 10

SCHUKO COVER WITH SAFETY PROTECTION

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |
| POLAR WHITE<br><b>59732</b>                                                           | METALLIC ALUMINIUM<br><b>59732-AM</b>                                                 | CARBON METALLIC<br><b>59732-CM</b>                                                    | MATT WHITE<br><b>59732-BM</b>                                                         | MATT BLACK<br><b>59732-NM</b>                                                         | RED<br><b>59732-RD</b>                                                                |
| Pack of 10                                                                            | 10                                                                                    | 10                                                                                    | 1                                                                                     | 1                                                                                     | 1                                                                                     |

SCHUKO COVER WITH SAFETY PROTECTION LABEL

|                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |
| POLAR WHITE<br><b>59732-E</b>                                                         | METALLIC ALUMINIUM<br><b>59732-E-AM</b>                                               | CARBON METALLIC<br><b>59732-E-CM</b>                                                  |
| Pack of 1                                                                             | 1                                                                                     | 1                                                                                     |

SCHUKO COVER WITH SAFETY PROTECTION VOLTAGE INDICATOR LABEL ON OUTLET

|                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |
| POLAR WHITE<br><b>59732-EI</b>                                                        | METALLIC ALUMINIUM<br><b>59732-EI-AM</b>                                              | CARBON METALLIC<br><b>59732-EI-CM</b>                                                 |
| Pack of 1                                                                             | 1                                                                                     | 1                                                                                     |

Socket outlets with safety protection



**Schuko® socket outlet with screwless terminal with claws**  
**Schuko® socket outlet with screwless terminal without claws**  
Screwless  
Screwless terminal for 2.5 mm flexible or rigid conductors

**19532-X**  
**19532**

Pack of 10

| SCHUKO SPRING LID WITH SAFETY PROTECTION       |                    |                   |                 |                 |
|------------------------------------------------|--------------------|-------------------|-----------------|-----------------|
|                                                |                    |                   |                 |                 |
| POLAR WHITE                                    | METALLIC ALUMINIUM | CARBON METALLIC   | MATT WHITE      | MATT BLACK      |
| <b>59814</b>                                   | <b>59814-AM</b>    | <b>59814-CM</b>   | <b>59814-BM</b> | <b>59814-NM</b> |
| Pack of 1                                      | Pack of 1          | Pack of 1         | Pack of 1       | Pack of 1       |
| SCHUKO SPRING LID WITH SAFETY PROTECTION LABEL |                    |                   |                 |                 |
|                                                |                    |                   |                 |                 |
| POLAR WHITE                                    | METALLIC ALUMINIUM | CARBON METALLIC   |                 |                 |
| <b>59814-E</b>                                 | <b>59814-E-AM</b>  | <b>59814-E-CM</b> |                 |                 |
| Pack of 2                                      | Pack of 1          | Pack of 1         |                 |                 |
| CLOSED SCHUKO COVER WITH SAFETY PROTECTION     |                    |                   |                 |                 |
|                                                |                    |                   |                 |                 |
| POLAR WHITE                                    | METALLIC ALUMINIUM | CARBON METALLIC   |                 |                 |
| <b>59814-K</b>                                 | <b>59814-K-AM</b>  | <b>59814-K-CM</b> |                 |                 |
| Pack of 1                                      | Pack of 1          | Pack of 1         |                 |                 |



**IP44 gasket kit**  
For SCHUKO socket outlets with Miro and Style spring lid

**2395**

Pack of 1



**Lamp for SCHUKO base with operating indicator (SI)**  
1.5 mA, 230 V AW/ 50 Hz

**2394**

Pack of 1



**2P+E socket outlet (French standard) with safety protection**  
Screwed terminals 16 A 250 V~

**18572**

Pack of 10

| FRENCH PLUG COVER |                    |                 |                 |                 |
|-------------------|--------------------|-----------------|-----------------|-----------------|
|                   |                    |                 |                 |                 |
| POLAR WHITE       | METALLIC ALUMINIUM | CARBON METALLIC | MATT WHITE      | MATT BLACK      |
| <b>59772</b>      | <b>59772-AM</b>    | <b>59772-CM</b> | <b>59772-BM</b> | <b>59772-NM</b> |
| Pack of 10        | Pack of 10         | Pack of 10      | Pack of 1       | Pack of 1       |

IP44 switch solutions



**One-way switch**  
**Two-way switch 16 A**  
**Intermediate switch**  
**Push-button**  
**Push-button two-way switch**

**19505-X**  
**19506-X**  
**19507-X**  
**19516-X**  
**19511-2X**

Pack of 1

| SWITCH          |                    |                    |                    |                    |
|-----------------|--------------------|--------------------|--------------------|--------------------|
|                 |                    |                    |                    |                    |
| POLAR WHITE     | METALLIC ALUMINIUM | CARBON METALLIC    | MATT BLACK         |                    |
| <b>59705-IP</b> | <b>59705-IP-AM</b> | <b>59705-IP-CM</b> | <b>59705-IP-NM</b> |                    |
| Pack of 1       | Pack of 1          | Pack of 1          | Pack of 1          |                    |
|                 | <b>59716-IP</b>    | <b>59716-IP-AM</b> | <b>59716-IP-CM</b> | <b>59716-IP-NM</b> |
| Bell symbol     | Pack of 1          | Pack of 1          | Pack of 1          | Pack of 1          |
|                 | <b>59717-IP</b>    | <b>59717-IP-AM</b> | <b>59717-IP-CM</b> | <b>59717-IP-NM</b> |
| Bulb symbol     | Pack of 1          | Pack of 1          | Pack of 1          | Pack of 1          |

These switches are only suitable for IP44 use with the above-indicated mechanisms, when used together with the corresponding gasket. They are not suitable for MEC18 mechanisms



**Double one-way switch**  
**Double two-way switch**  
**Double push-button**

**19509-X**  
**19510-X**  
**19511-X**

Pack of 1

| DOUBLE SWITCH   |                    |                    |                    |  |
|-----------------|--------------------|--------------------|--------------------|--|
|                 |                    |                    |                    |  |
| POLAR WHITE     | METALLIC ALUMINIUM | CARBON METALLIC    | MATT BLACK         |  |
| <b>59709-IP</b> | <b>59709-IP-AM</b> | <b>59709-IP-CM</b> | <b>59709-IP-NM</b> |  |
| Pack of 1       | Pack of 1          | Pack of 1          | Pack of 1          |  |

These switches are only suitable for IP44 use with the above-indicated mechanisms, when used together with the corresponding gasket. They are not suitable for MEC18 mechanisms



**One-way switch for blinds**  
**Double push-button for blinds**

**19569-X**  
**19565-X**

Pack of 1

| DOUBLE SWITCH FOR BLINDS |                    |                    |                    |  |
|--------------------------|--------------------|--------------------|--------------------|--|
|                          |                    |                    |                    |  |
| POLAR WHITE              | METALLIC ALUMINIUM | CARBON METALLIC    | MATT BLACK         |  |
| <b>59765-IP</b>          | <b>59765-IP-AM</b> | <b>59765-IP-CM</b> | <b>59765-IP-NM</b> |  |
| Pack of 1                | Pack of 1          | Pack of 1          | Pack of 1          |  |

These switches are only suitable for IP44 use with the above-indicated mechanisms, when used together with the corresponding gasket. They are not suitable for MEC18 mechanisms

**Replacement gaskets for switches** **2396**

Suitable for single and double mechanisms shown on this page.

Pack of 1

The IP44 functions work with the standard frames in the series.

IP44 socket solutions



**Schuko® socket outlet with screwless terminal with claws**  
**Schuko® socket outlet with screwless terminal without claws**  
Screwless  
Screwless terminal for 2.5 mm flexible or rigid conductors

**19532-X**  
**19532**


Pack of 10

| SCHUKO SPRING LID WITH SAFETY PROTECTION |                    |                    |                    |                    |
|------------------------------------------|--------------------|--------------------|--------------------|--------------------|
|                                          |                    |                    |                    |                    |
| POLAR WHITE                              | METALLIC ALUMINIUM | CARBON METALLIC    | MATT WHITE         | MATT BLACK         |
| <b>59814-IP</b>                          | <b>59814-IP-AM</b> | <b>59814-IP-CM</b> | <b>59814-IP-BM</b> | <b>59814-IP-NM</b> |
| Pack of 1                                | Pack of 1          | Pack of 1          | Pack of 1          | Pack of 1          |

The cover includes the necessary sealing gasket

**IP44 gasket kit** **2395**  
  
Spare part for IP44 59814-IP covers  
Pack of 1

Socket solutions for TV-FM-R/TV-SAT IP44



**TV\_FM socket outlet Series 2-10** **2932**  
**Final outlet** **2933**  
**Individual installation** **2934**

**R/TV-SAT socket with 2 outputs Series 6-12** **2921**  
**Series 2-5** **2922**  
**Final outlet** **2923**  
**Individual installation** **2924**  
(Manufacturer: TELEVÉS)  
(Manufacturer: TELEVÉS)

Pack of 10

| TV COVER 2 INPUTS WITH IP44 GASKETS |                    |                    |                    |                    |
|-------------------------------------|--------------------|--------------------|--------------------|--------------------|
|                                     |                    |                    |                    |                    |
| POLAR WHITE                         | METALLIC ALUMINIUM | CARBON METALLIC    | MATT WHITE         | MATT BLACK         |
| <b>59320-IP</b>                     | <b>59320-IP-AM</b> | <b>59320-IP-CM</b> | <b>59320-IP-BM</b> | <b>59320-IP-NM</b> |
| Pack of 1                           | Pack of 1          | Pack of 1          | Pack of 1          | Pack of 1          |

RJ IP44 connectivity terminals



**Adapter for 1 RJ45/RJ11 connector (AMP, ITT, etc.)** **19582-1**

Pack of 10

| RJ45 CONNECTOR COVER WITH IP44 GASKETS |                    |                    |                    |                    |
|----------------------------------------|--------------------|--------------------|--------------------|--------------------|
|                                        |                    |                    |                    |                    |
| POLAR WHITE                            | METALLIC ALUMINIUM | CARBON METALLIC    | MATT WHITE         | MATT BLACK         |
| <b>59782-IP</b>                        | <b>59782-IP-AM</b> | <b>59782-IP-CM</b> | <b>59782-IP-BM</b> | <b>59782-IP-NM</b> |
| Pack of 1                              | Pack of 1          | Pack of 1          | Pack of 1          | Pack of 1          |



**Standard Keystone RJ45 connector** **3186-B**  
Cat. 6  
White  
Tool-free terminal

Pack of 25

The IP44 functions work with the standard frames in the series.

Connected Miro (with frame and switch)



**Connected one-way switch** **NX59906**  
230 VAC 50 Hz, 10 A  
Screwed terminals  
160 m range (in open space).  
It can also be controlled manually with an external push-button.  
Includes connected mechanism, switch and single frame in Polar White

Pack of 1

| SWITCH             |                   |                   |                   |
|--------------------|-------------------|-------------------|-------------------|
|                    |                   |                   |                   |
| METALLIC ALUMINIUM | CARBON METALLIC   | MATT WHITE        | MATT BLACK        |
| <b>SM59705-AM</b>  | <b>SM59705-CM</b> | <b>SM59705-BM</b> | <b>SM59705-NM</b> |
| Pack of 1          | Pack of 1         | Pack of 1         | Pack of 1         |

| Switch with embellisher |                    |                    |                    |
|-------------------------|--------------------|--------------------|--------------------|
| <b>SM59705-AMC</b>      | <b>SM59705-CMC</b> | <b>SM59705-BMC</b> | <b>SM59705-NMC</b> |
| Pack of 1               | Pack of 1          | Pack of 1          | Pack of 1          |



**Connected universal dimmer** **NX59949**  
230 VAC 50 Hz  
Compatible with incandescent lamps (14-200 W AC), 230 V halogen lamps (14-150 W AC), 12 V halogen magnetic transformer (14-150 VA), 12 V halogen electronic transformer (14-150 VA), LED trailing edge RC (7-100 VA at 230 V AC), LED leading edge RL (7-20 VA at 230 V AC).  
Screwed terminals.  
Range: 160 m (in open space).  
It can also be controlled manually with an external push-button.  
Includes connected mechanism, switch and single frame in Polar White.

Pack of 1

| SWITCH             |                   |                   |                   |
|--------------------|-------------------|-------------------|-------------------|
|                    |                   |                   |                   |
| METALLIC ALUMINIUM | CARBON METALLIC   | MATT WHITE        | MATT BLACK        |
| <b>SM59705-AM</b>  | <b>SM59705-CM</b> | <b>SM59705-BM</b> | <b>SM59705-NM</b> |
| Pack of 1          | Pack of 1         | Pack of 1         | Pack of 1         |

| Switch with embellisher |                    |                    |                    |
|-------------------------|--------------------|--------------------|--------------------|
| <b>SM59705-AMC</b>      | <b>SM59705-CMC</b> | <b>SM59705-BMC</b> | <b>SM59705-NMC</b> |
| Pack of 1               | Pack of 1          | Pack of 1          | Pack of 1          |



**Connected one-way switch for blinds** **NX59965**  
230 VAC 50 Hz, 4 A cos  $\varnothing$  = 0.6  
Screwed terminals  
Range: 160 m (in open space).  
Includes connected mechanism, switch and single frame in Polar White.

Pack of 1

| SWITCH             |                   |                   |                   |
|--------------------|-------------------|-------------------|-------------------|
|                    |                   |                   |                   |
| METALLIC ALUMINIUM | CARBON METALLIC   | MATT WHITE        | MATT BLACK        |
| <b>SM59765-AM</b>  | <b>SM59765-CM</b> | <b>SM59765-BM</b> | <b>SM59765-NM</b> |
| Pack of 1          | Pack of 1         | Pack of 1         | Pack of 1         |

| Switch with embellisher |                    |                    |                    |
|-------------------------|--------------------|--------------------|--------------------|
| <b>SM59765-AMC</b>      | <b>SM59765-CMC</b> | <b>SM59765-BMC</b> | <b>SM59765-NMC</b> |
| Pack of 1               | Pack of 1          | Pack of 1          | Pack of 1          |



**Connected power socket with consumption measurement** **NX59924**  
230 VAC, 50 Hz, 16 A  
Screwed terminals  
Range: 160 m (in open space).  
Can be switched on/off manually with a control button.  
Includes connected mechanism, cover and single frame in Polar White .

Pack of 1

| SOCKET COVERS      |                   |                   |                   |
|--------------------|-------------------|-------------------|-------------------|
|                    |                   |                   |                   |
| METALLIC ALUMINIUM | CARBON METALLIC   | MATT WHITE        | MATT BLACK        |
| <b>SM59724-AM</b>  | <b>SM59724-CM</b> | <b>SM59724-BM</b> | <b>SM59724-NM</b> |
| Pack of 1          | Pack of 1         | Pack of 1         | Pack of 1         |



Smart flush-mounted mechanisms





**Connected one-way switch**  
230 VAC 50 Hz, 10 A  
Screwed terminals  
Range: 160 m (in open space).  
It can also be controlled manually with an external push-button.  
Compatible with BJC Miro frames

Pack of 1

**NX18506**

|         | SWITCH                                                                            |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|---------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|         |  |  |  |  |  |
|         | POLAR WHITE                                                                       | METALLIC ALUMINIUM                                                                 | CARBON METALLIC                                                                     | MATT WHITE                                                                          | MATT BLACK                                                                          |
|         | <b>SM59705</b>                                                                    | <b>SM59705-AM</b>                                                                  | <b>SM59705-CM</b>                                                                   | <b>SM59705-BM</b>                                                                   | <b>SM59705-NM</b>                                                                   |
| Pack of | 1                                                                                 | 1                                                                                  | 1                                                                                   | 1                                                                                   | 1                                                                                   |
|         | Switch with embellisher                                                           |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|         | <b>SM59705-C</b>                                                                  | <b>SM59705-AMC</b>                                                                 | <b>SM59705-CMC</b>                                                                  | <b>SM59705-BMC</b>                                                                  | <b>SM59705-NMC</b>                                                                  |
| Pack of | 1                                                                                 | 1                                                                                  | 1                                                                                   | 1                                                                                   | 1                                                                                   |



**Connected universal dimmer**  
230 VAC 50 Hz  
Compatible with incandescent lamps (14-200 W AC), 230 V halogen lamps (14-150 W AC), 12 V halogen magnetic transformer (14-150 VA), 12 V halogen electronic transformer (14-150 VA), LED trailing edge RC (7-100 VA at 230 V AC), LED leading edge RL (7-20 VA at 230 V AC).  
Screwed terminals.  
Range: 160 m (in open space).  
It can also be controlled manually with an external push-button.  
Compatible with BJC Miro frames

Pack of 1

**NX21545**

|         | SWITCH                                                                            |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|---------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|         |  |  |  |  |  |
|         | POLAR WHITE                                                                       | METALLIC ALUMINIUM                                                                 | CARBON METALLIC                                                                     | MATT WHITE                                                                          | MATT BLACK                                                                          |
|         | <b>SM59705</b>                                                                    | <b>SM59705-AM</b>                                                                  | <b>SM59705-CM</b>                                                                   | <b>SM59705-BM</b>                                                                   | <b>SM59705-NM</b>                                                                   |
| Pack of | 1                                                                                 | 1                                                                                  | 1                                                                                   | 1                                                                                   | 1                                                                                   |
|         | Switch with embellisher                                                           |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|         | <b>SM59705-C</b>                                                                  | <b>SM59705-AMC</b>                                                                 | <b>SM59705-CMC</b>                                                                  | <b>SM59705-BMC</b>                                                                  | <b>SM59705-NMC</b>                                                                  |
| Pack of | 1                                                                                 | 1                                                                                  | 1                                                                                   | 1                                                                                   | 1                                                                                   |



**Connected one-way switch for blinds**  
230 VAC 50 Hz, 4 A cos φ = 0.6  
Screwed terminals  
Range: 160 m (in open space).  
Compatible with BJC Miro frames.

Pack of 1

**NX18565**

|         | SWITCH                                                                              |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|---------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|         |  |  |  |  |  |
|         | POLAR WHITE                                                                         | METALLIC ALUMINIUM                                                                   | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
|         | <b>SM59765</b>                                                                      | <b>SM59765-AM</b>                                                                    | <b>SM59765-CM</b>                                                                     | <b>SM59765-BM</b>                                                                     | <b>SM59765-NM</b>                                                                     |
| Pack of | 1                                                                                   | 1                                                                                    | 1                                                                                     | 1                                                                                     | 1                                                                                     |
|         | Switch with embellisher                                                             |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|         | <b>SM59765-C</b>                                                                    | <b>SM59765-AMC</b>                                                                   | <b>SM59765-CMC</b>                                                                    | <b>SM59765-BMC</b>                                                                    | <b>SM59765-NMC</b>                                                                    |
| Pack of | 1                                                                                   | 1                                                                                    | 1                                                                                     | 1                                                                                     | 1                                                                                     |



**Connected power socket with consumption measurement**  
230 VAC, 50 Hz, 16 A.  
Screwed terminals.  
Range: 160 m (in open space).  
Can be switched on/off manually with a control button.  
Compatible with BJC Miro frames.

Pack of 1

**NX18524**

|         | SOCKET COVERS                                                                       |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|---------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|         |  |  |  |  |  |
|         | POLAR WHITE                                                                         | METALLIC ALUMINIUM                                                                   | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
|         | <b>SM59724</b>                                                                      | <b>SM59724-AM</b>                                                                    | <b>SM59724-CM</b>                                                                     | <b>SM59724-BM</b>                                                                     | <b>SM59724-NM</b>                                                                     |
| Pack of | 1                                                                                   | 1                                                                                    | 1                                                                                     | 1                                                                                     | 1                                                                                     |

Surface-mounted connected Miro





**Surface-mounted connected push-button**  
Powered by a 3 V battery, CR2032 (supplied)  
Secured by adhesive or screws in flush-mounting box.  
Range: 200 m (in open space)  
Includes connected mechanism, fixing base, frame and switch in Polar White.

Pack of 1

**NX59939**

|                                                                                                       | SURFACE-MOUNTED SMART SWITCH                                                          |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                                                                                                       |    |    |    |    |    |
|                                                                                                       | POLAR WHITE                                                                           | METALLIC ALUMINIUM                                                                    | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
|                                                                                                       | <b>SM59739</b>                                                                        | <b>SM59739-AM</b>                                                                     | <b>SM59739-CM</b>                                                                     | <b>SM59739-BM</b>                                                                     | <b>SM59739-NM</b>                                                                     |
| Pack of                                                                                               | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     |
|                                                                                                       | SURFACE-MOUNTED SMART SWITCH WITH "1-2" SYMBOLS                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| Pad printing<br>   |    |    |    |    |    |
|                                                                                                       | POLAR WHITE                                                                           | METALLIC ALUMINIUM                                                                    | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
|                                                                                                       | <b>SM59739-1</b>                                                                      | <b>SM59739-1AM</b>                                                                    | <b>SM59739-1CM</b>                                                                    | <b>SM59739-1BM</b>                                                                    | <b>SM59739-1NM</b>                                                                    |
| Pack of                                                                                               | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     |
|                                                                                                       | SURFACE-MOUNTED SMART SWITCH WITH "DAY/NIGHT" SYMBOLS                                 |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| Pad printing<br>   |    |    |    |    |    |
|                                                                                                       | POLAR WHITE                                                                           | METALLIC ALUMINIUM                                                                    | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
|                                                                                                       | <b>SM59739-2</b>                                                                      | <b>SM59739-2AM</b>                                                                    | <b>SM59739-2CM</b>                                                                    | <b>SM59739-2BM</b>                                                                    | <b>SM59739-2NM</b>                                                                    |
| Pack of                                                                                               | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     |
|                                                                                                       | SURFACE-MOUNTED SMART SWITCH WITH "INPUT/OUTPUT" SYMBOLS                              |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| Pad printing<br> |  |  |  |  |  |
|                                                                                                       | POLAR WHITE                                                                           | METALLIC ALUMINIUM                                                                    | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
|                                                                                                       | <b>SM59739-3</b>                                                                      | <b>SM59739-3AM</b>                                                                    | <b>SM59739-3CM</b>                                                                    | <b>SM59739-3BM</b>                                                                    | <b>SM59739-3NM</b>                                                                    |
| Pack of                                                                                               | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     |



**Surface-mounted connected double push-button**  
Powered by a 3 V battery, CR2032 (supplied).  
Secured by adhesive or screws in flush-mounting box.  
200 m range (in open space).  
Includes connected mechanism, fixing base, frame and switches in Polar White.

Pack of 1

**NX59940**

|                                                                                                       | SURFACE-MOUNTED DOUBLE SMART SWITCH                                                   |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                                                                                                       |  |  |  |  |  |
|                                                                                                       | POLAR WHITE                                                                           | METALLIC ALUMINIUM                                                                    | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
|                                                                                                       | <b>SM59740</b>                                                                        | <b>SM59740-AM</b>                                                                     | <b>SM59740-CM</b>                                                                     | <b>SM59740-BM</b>                                                                     | <b>SM59740-NM</b>                                                                     |
| Pack of                                                                                               | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     |
|                                                                                                       | SURFACE-MOUNTED SMART DOUBLE SWITCH WITH "1-2-3-4" SYMBOLS                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| Pad printing<br> |  |  |  |  |  |
|                                                                                                       | POLAR WHITE                                                                           | METALLIC ALUMINIUM                                                                    | CARBON METALLIC                                                                       | MATT WHITE                                                                            | MATT BLACK                                                                            |
|                                                                                                       | <b>SM59740-1</b>                                                                      | <b>SM59740-1AM</b>                                                                    | <b>SM59740-1CM</b>                                                                    | <b>SM59740-1BM</b>                                                                    | <b>SM59740-1NM</b>                                                                    |
| Pack of                                                                                               | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     |

TV-FM-R/TV-SAT socket outlets



**TV\_FM socket outlet**  
**Series 2-10**  
**Final outlet**  
**Individual installation**  
(Manufacturer: TELEVÉS)

**2932**  
**2933**  
**2934**

TV-FM COVER 2 OUTLETS

|                      |                                |                             |                        |                        |
|----------------------|--------------------------------|-----------------------------|------------------------|------------------------|
|                      |                                |                             |                        |                        |
| POLAR WHITE<br>59330 | METALLIC ALUMINIUM<br>59330-AM | CARBON METALLIC<br>59330-CM | MATT WHITE<br>59330-BM | MATT BLACK<br>59330-NM |
| Pack of 10           | 1                              | 1                           | 1                      | 1                      |

Pack of 10



**R/TV-SAT socket with 3 outputs**  
**Individual socket installation**  
(Manufacturer: TELEVÉS)

**2918**

R/TV-SAT COVER, 3 OUTLETS

|                      |                                |                             |                        |                        |
|----------------------|--------------------------------|-----------------------------|------------------------|------------------------|
|                      |                                |                             |                        |                        |
| POLAR WHITE<br>59341 | METALLIC ALUMINIUM<br>59341-AM | CARBON METALLIC<br>59341-CM | MATT WHITE<br>59341-BM | MATT BLACK<br>59341-NM |
| Pack of 1            | 1                              | 1                           | 1                      | 1                      |

Pack of 10

RJ type connectivity terminals



**Support for 1 standard RJ Keystone connector**

**19582-1**

Pack of 10

COVER FOR SINGLE RJ OR FIBRE OPTIC TERMINALS

|                      |                                |                             |                        |                        |
|----------------------|--------------------------------|-----------------------------|------------------------|------------------------|
|                      |                                |                             |                        |                        |
| POLAR WHITE<br>59782 | METALLIC ALUMINIUM<br>59782-AM | CARBON METALLIC<br>59782-CM | MATT WHITE<br>59782-BM | MATT BLACK<br>59782-NM |
| Pack of 10           | 1                              | 1                           | 1                      | 1                      |



**Support for 2 standard RJ Keystone connectors**

**19682-1**

Pack of 10

COVER FOR DOUBLE RJ OR FIBRE OPTIC TERMINALS

|                      |                                |                             |                        |                        |
|----------------------|--------------------------------|-----------------------------|------------------------|------------------------|
|                      |                                |                             |                        |                        |
| POLAR WHITE<br>59882 | METALLIC ALUMINIUM<br>59882-AM | CARBON METALLIC<br>59882-CM | MATT WHITE<br>59882-BM | MATT BLACK<br>59882-NM |
| Pack of 1            | 1                              | 1                           | 1                      | 1                      |



**Standard Keystone RJ45 connector**

**3186-B**

Cat. 6  
White  
Tool-free terminal

Pack of 25



**6-way RJ11 female connector telephone jack for BAT in basic telephone networks (screwless terminal)**

**19582**

Pack of 10

COVER FOR SINGLE RJ OR FIBRE OPTIC TERMINALS

|                      |                                |                             |                        |                        |
|----------------------|--------------------------------|-----------------------------|------------------------|------------------------|
|                      |                                |                             |                        |                        |
| POLAR WHITE<br>59782 | METALLIC ALUMINIUM<br>59782-AM | CARBON METALLIC<br>59782-CM | MATT WHITE<br>59782-BM | MATT BLACK<br>59782-NM |
| Pack of 10           | 1                              | 1                           | 1                      | 1                      |



**8-way female RJ45 connector Cat. 6**  
**Tool-free connection by insulation piercing**

**18586**

Pack of 10



**Double 8-way RJ45 female connector Cat. 6**  
**Tool-free connection by insulation piercing**

**18586-2**

Pack of 1

COVER FOR DOUBLE RJ OR FIBRE OPTIC TERMINALS

|                      |                                |                             |                        |                        |
|----------------------|--------------------------------|-----------------------------|------------------------|------------------------|
|                      |                                |                             |                        |                        |
| POLAR WHITE<br>59882 | METALLIC ALUMINIUM<br>59882-AM | CARBON METALLIC<br>59882-CM | MATT WHITE<br>59882-BM | MATT BLACK<br>59882-NM |
| Pack of 1            | 1                              | 1                           | 1                      | 1                      |

SW/APC fiber optic solutions



**Support for 1 standard RJ Keystone connector**

**19582-1**

Pack of 10

COVER FOR SINGLE RJ OR FIBRE OPTIC TERMINALS



POLAR WHITE  
**59782**  
10



METALLIC ALUMINIUM  
**59782-AM**  
1



CARBON METALLIC  
**59782-CM**  
1



MATT WHITE  
**59782-BM**  
1



MATT BLACK  
**59782-NM**  
1

Pack of



**Support for 2 standard RJ Keystone connectors**

**19682-1**

Pack of 10

COVER FOR DOUBLE RJ OR FIBRE OPTIC TERMINALS



POLAR WHITE  
**59882**  
1



METALLIC ALUMINIUM  
**59882-AM**  
1



CARBON METALLIC  
**59882-CM**  
1



MATT WHITE  
**59882-BM**  
1



MATT BLACK  
**59882-NM**  
1

Pack of



**Coupler for SW/APC-type optical fibre connector**

**3191**

To be installed in conjunction with the 3190 adapter. It must be installed in a deep box in order to respect the bending radius of the standard fibre conductor

Pack of 20



**A keystone adapter should be used with coupler 3191 in RJ adapters**

**3190**

For proper use of this adapter, an increased-depth flush-mounting box is recommended

Pack of 20

Multimedia connectors



**Type A HDMI connector**  
Screw terminal connection

White  
Beige  
Grey

**18578-HDMI**  
**18578-HDMI-A**  
**18578-HDMI-G**

Pack of 1

COVER FOR MULTIMEDIA SOCKETS



POLAR WHITE  
**59778**  
1



METALLIC ALUMINIUM  
**59778-AM**  
1



CARBON METALLIC  
**59778-CM**  
1



MATT WHITE  
**59778-BM**  
1



MATT BLACK  
**59778-NM**  
1

Pack of

Sound modules



**Loudspeaker connectors**  
**Simple Stereo**

Pack of 1

**19563-2**  
**19563-4**

COVER FOR MULTIMEDIA SOCKETS



POLAR WHITE  
**59778**  
1



METALLIC ALUMINIUM  
**59778-AM**  
1



CARBON METALLIC  
**59778-CM**  
1



MATT WHITE  
**59778-BM**  
1



MATT BLACK  
**59778-NM**  
1

Pack of

**Adapter for EGI\***

**0708.10** White

**Adapter for TEZ\***

**TX82/BL** (White)  
**TX82/MF** (Ivory)  
**TX82/GR** (Grey)

**Adapter for SONEICO\***

**PCP9135-01** (White)  
**PCP9135-10** (Ivory)  
**PCP9135-02** (Anthracite grey)  
**PCP9135-12** (Steel)

\*References to be requested from each manufacturer



**Volume control potentiometer**

3 W, 27  $\Omega$ , mono

**59560**

Pack of 1

Temperature control

**Room thermostat**  
Monitoring and control of temperature in closed rooms  
Type of sensor: Bi-metal Voltage: 230 V~; 24 V~, 50 Hz  
Changeover capacity at 230 Vac: 10(4) A, at 24 Vac: 1(1) A  
Range: 5 to 30 °C (numerical scale \* to 6)


ROOM THERMOSTAT



POLAR WHITE  
**23144**  
1



METALLIC ALUMINIUM  
**59144-AM**  
1



CARBON METALLIC  
**59144-CM**  
1

Pack of

**Heated floor thermostat**  
Electronic temperature control for heating systems, for example: electric heated floor systems, bathrooms, ceilings, marble and heated walls.  
Voltage: 230 V~, 50 Hz  
Sensor: external or internal & external (monitor).  
Floor sensor supplied with the package. Shut-off capacity: 16(2) A  
Range: 10 to 50 °C (scale of 1 to 5)  
Indications (LEDs): heating up (Network), and eco mode activated (green).  
Extension of the sensor: up to 50 m only with 0.5 mm<sup>2</sup> cable, double insulated.  
Note: Ensure that the sensor cabling is protected by insulation.  
It is not possible to wire the sensor in parallel with AC power lines.

HEATED FLOOR THERMOSTAT



POLAR WHITE  
**23244**  
1



METALLIC ALUMINIUM  
**59244-AM**  
1



CARBON METALLIC  
**59244-CM**  
1

Pack of

Motion detector



**Spherical motion detector, 3-wire mechanism**

**18555-3**

Contact rating (3-wire, relay output):  
Resistive load 2,300 W, 10 A max.,  $\cos \varphi = 1$   
Inductive load 1,500 W, 5 A max.,  $\cos \varphi = 0.6$   
Halogen lamps with a 1000 VA transformer  
Electronic ballasts e.g. 2 x 36 W (20 max.)  
Compatible with LED loads

COVER FOR SPHERICAL MOTION DETECTOR



POLAR WHITE  
**59755**  
1



METALLIC ALUMINIUM  
**59755-AM**  
1



CARBON METALLIC  
**59755-CM**  
1



MATT WHITE  
**59755-BM**  
1



MATT BLACK  
**59755-NM**  
1

Pack of



Buzzers and indicator lights



**Buzzer module**

- Polar White
- Metallic Aluminium
- Carbon Metallic

230V

Pack of 1

**18540**

**18540-AM**

**18540-CM**

M-SYSTEM ADAPTERS FOR ONE MODULE



POLAR WHITE  
**59740**



METALLIC ALUMINIUM  
**59740-AM**



CARBON METALLIC  
**59740-CM**



MATT WHITE  
**59740-BM**



MATT BLACK  
**59740-NM**

Pack of 1

Assorted mechanisms



**Cord operated push-button**

Pack of 1


**19516-X**



**Cord operated changeover push-button**

Pack of 1

**19511-2X**



CORD OPERATED SWITCH

Pack of 1

POLAR WHITE  
**59170**

**Blank cover**

BLANK COVER



POLAR WHITE  
**59033**



METALLIC ALUMINIUM  
**59033-AM**



CARBON METALLIC  
**59033-CM**



MATT WHITE  
**59033-BM**



MATT BLACK  
**59033-NM**

Pack of 10

**Cable output**

CABLE OUTPUT



POLAR WHITE  
**59734**



METALLIC ALUMINIUM  
**59734-AM**



CARBON METALLIC  
**59734-CM**



MATT WHITE  
**59734-BM**



MATT BLACK  
**59734-NM**

Pack of 10

**Intermediate frame for 51x51mm mechanisms**

INTERMEDIATE FRAME FOR SIX51MM MECHANISMS



POLAR WHITE  
**59744**



METALLIC ALUMINIUM  
**59744-AM**



CARBON METALLIC  
**59744-CM**

Pack of 1

Assorted material



**Universal linking mechanism**

Thermoplastic material

Dimensions: 71x71x43 mm

Pack of 640

**2373-I**



**Protective cover**

Allows you to locate the box after plastering

Pack of 1000

**2374-I**



**Claws for metal frames**

Bag with 50 claws and 50 screws to assemble 25 fixing frames

**16-GAR**



**1-gang flush-mounting box for hollow partition walls**

Pack of 120

**2341**



**2-gang flush-mounting box for hollow partition walls**

Pack of 60

**2342**



**3-gang flush-mounting box for hollow partition walls**

Pack of 35

**2343**



**4-gang flush-mounting box for hollow partition walls**

Pack of 30

**2344**



**5-gang flush-mounting box for hollow partition walls**

Pack of 21

**2345**



**Hole saw with countersink for hollow partition walls**

diam. 68 mm / depth. 40 mm

Pack of 1

**2158000**



**Countersink for Ø 68 mm**

Tool for flush installation of hollow wall boxes

Pack of 1

**5892000**



**Replacement blades for ref. 5892000**

Pack of 1

**5893000**



**BJC fixing frame aligner**

Pack of 1

**3201**

To achieve the designed installation results, the use of these boxes and a hole saw with countersink is recommended.

Miro frames - plastic

|                                                                                         |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|        |  |  |  |  |
| WHITE<br>POLAR                                                                          | ALUMINIUM<br>METALLIC                                                             | CARBON<br>METALLIC                                                                | WHITE<br>MATE                                                                      | BLACK<br>MATE                                                                       |
| Pack of                                                                                 | Pack of                                                                           | Pack of                                                                           | Pack of                                                                            | Pack of                                                                             |
|  59001 | 59001-AM                                                                          | 59001-CM                                                                          | 59001-BM                                                                           | 59001-NM                                                                            |
| 10                                                                                      | 1                                                                                 | 1                                                                                 | 1                                                                                  | 1                                                                                   |
|  59002 | 59002-AM                                                                          | 59002-CM                                                                          | 59002-BM                                                                           | 59002-NM                                                                            |
| 10                                                                                      | 1                                                                                 | 1                                                                                 | 1                                                                                  | 1                                                                                   |
|  59003 | 59003-AM                                                                          | 59003-CM                                                                          | 59003-BM                                                                           | 59003-NM                                                                            |
| 10                                                                                      | 1                                                                                 | 1                                                                                 | 1                                                                                  | 1                                                                                   |
|  59004  | 59004-AM                                                                          | 59004-CM                                                                          | 59004-BM                                                                           | 59004-NM                                                                            |
| 10                                                                                      | 1                                                                                 | 1                                                                                 | 1                                                                                  | 1                                                                                   |
|  59005  | 59005-AM                                                                          | 59005-CM                                                                          | 59005-BM                                                                           | 59005-NM                                                                            |
| 1                                                                                       | 1                                                                                 | 1                                                                                 | 1                                                                                  | 1                                                                                   |

The same frame type can be used for both horizontal and vertical mounting.

Miro frames - crystal

|                                                                                              |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|           |  |  |  |  |
| CRYSTAL<br>CRYSTAL GREEN                                                                     | WHITE                                                                               | BLACK                                                                               | SAND                                                                                 | RED<br>ORIENTAL                                                                       |
| Pack of                                                                                      | Pack of                                                                             | Pack of                                                                             | Pack of                                                                              | Pack of                                                                               |
|  59001-VG | 59001-CB                                                                            | 59001-NE                                                                            | 59001-AE                                                                             | 59001-RO                                                                              |
| 1                                                                                            | 1                                                                                   | 1                                                                                   | 1                                                                                    | 1                                                                                     |
|  59002-VG | 59002-CB                                                                            | 59002-NE                                                                            | 59002-AE                                                                             | 59002-RO                                                                              |
| 1                                                                                            | 1                                                                                   | 1                                                                                   | 1                                                                                    | 1                                                                                     |
|  59003-VG | 59003-CB                                                                            | 59003-NE                                                                            | 59003-AE                                                                             | 59003-RO                                                                              |
| 1                                                                                            | 1                                                                                   | 1                                                                                   | 1                                                                                    | 1                                                                                     |
|  59004-VG  | 59004-CB                                                                            | 59004-NE                                                                            | 59004-AE                                                                             | 59004-RO                                                                              |
| 1                                                                                            | 1                                                                                   | 1                                                                                   | 1                                                                                    | 1                                                                                     |
|  59005-VG  | 59005-CB                                                                            | 59005-NE                                                                            | 59005-AE                                                                             | 59005-RO                                                                              |
| 1                                                                                            | 1                                                                                   | 1                                                                                   | 1                                                                                    | 1                                                                                     |

The same frame type can be used for both horizontal and vertical mounting.

To install Miro frames correctly in hollow partition walls, use the 2158000 hole saw (or equivalent) to ensure the flush-mounting box is flush with the wall.




Miro frames - matt colours

Miro frames - pure aluminium

|                                                                                              |                                                                                     |
|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|           |  |
| ALUMINIUM                                                                                    | YELLOW<br>OXIDE                                                                     |
| Pack of                                                                                      | Pack of                                                                             |
|  59001-AL | 59001-AO                                                                            |
| 1                                                                                            | 1                                                                                   |
|  59002-AL | 59002-AO                                                                            |
| 1                                                                                            | 1                                                                                   |
|  59003-AL | 59003-AO                                                                            |
| 1                                                                                            | 1                                                                                   |
|  59004-AL | 59004-AO                                                                            |
| 1                                                                                            | 1                                                                                   |
|  59005-AL | 59005-AO                                                                            |
| 1                                                                                            | 1                                                                                   |

The same frame type can be used for both horizontal and vertical mounting.

Miro frames - solid wood

|                                                                                                |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|           |  |  |  |  |
| MAPLE<br>RED                                                                                   | MAPLE                                                                                 | CHERRY<br>(PROCESSED COLOUR)                                                          | WENGE<br>(PROCESSED COLOUR)                                                           | BEECH<br>(PROCESSED COLOUR)                                                           |
| Pack of                                                                                        | Pack of                                                                               | Pack of                                                                               | Pack of                                                                               | Pack of                                                                               |
|  59001-AJ | 59001-AR                                                                              | 59001-CE                                                                              | 59001-WE                                                                              | 59001-HA                                                                              |
| 1                                                                                              | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     |
|  59002-AJ | 59002-AR                                                                              | 59002-CE                                                                              | 59002-WE                                                                              | 59002-HA                                                                              |
| 1                                                                                              | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     |
|  59003-AJ | 59003-AR                                                                              | 59003-CE                                                                              | 59003-WE                                                                              | 59003-HA                                                                              |
| 1                                                                                              | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     |
|  59004-AJ | 59004-AR                                                                              | 59004-CE                                                                              | 59004-WE                                                                              | 59004-HA                                                                              |
| 1                                                                                              | 1                                                                                     | 1                                                                                     | 1                                                                                     | 1                                                                                     |

The same frame type can be used for both horizontal and vertical mounting.

MEASUREMENTS

|                                                                                       |             |
|---------------------------------------------------------------------------------------|-------------|
|  | 90 x 90 mm  |
|  | 90 x 161 mm |
|  | 90 x 232 mm |
|  | 90 x 303 mm |

To install Miro frames correctly in hollow partition walls, use the 2158000 hole saw (or equivalent) to ensure the flush-mounting box is flush with the wall.

# BJC

## Viva

### Simplicity that lasts

Our lifestyles and dreams are constantly changing. BJC presents the Viva collection, designed for young and practical people who care about the environment and are always on the go.

A versatile series with a timeless design, based on simple lines and shapes. Designed and manufactured in Rubi to BJC's quality standards, at a highly competitive price.



Polar White



Piano Black




Moon Silver



Lava Grey





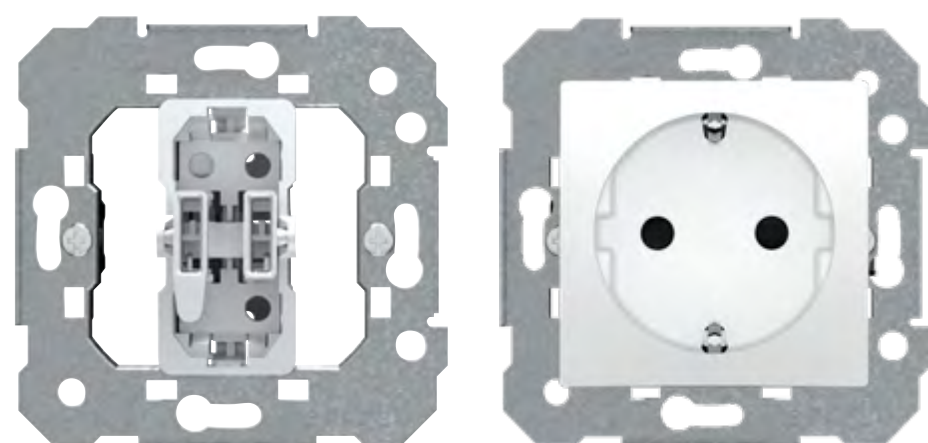

Viva was created to simplify installation processes. You can choose from two references: the mechanism + switch or cover, in a single reference, and the frame. The metal frame adapts to all types of surfaces and features two grooves on both sides to help align different mechanisms. The frames fit into the fixing frame through the existing tabs, which have been specially designed to compensate for uneven wall surfaces, guaranteeing a solid connection and accurate and smooth finishes.

- The galvanised steel fixing frames are treated to prevent corrosion, ensuring durable installation components.
- Fixing frames with upper and lower profiles to facilitate assembly and ensure the mechanism is rigidly positioned.

#### Certifications



## Choose your favourite colour

Viva



Polar White



Sand Beige /  
Polar White



Piano Black /  
Polar White




Stone Grey /  
Polar White




Piano Black /  
Moon Silver



Polar White /  
Moon Silver



Sand Beige /  
Lava Grey



Stone Grey /  
Lava Grey



Moon Silver



Lava Grey /  
Moon Silver



Lava Grey



Moon Silver /  
Lava Grey



Schuko + Frame + Surface mounting box



One-way switch + Schuko + Double frame + Surface mounting box

# Accuracy and reliability

It is suitable for both new buildings and renovation projects. The metal frame can be adapted to all types of surfaces.

The modular surface mounting box can be used to form surface mounting boxes with up to 4 gangs, blending seamlessly with the series' aesthetic.



Two grooves on each side of the metal frame help to align different mechanisms




The frame can be fixed or extracted without the need to remove the switch



Cover for the socket outlet, with a concealed screw. Quick and accurate connection



The same frame is used for horizontal and vertical installations



Compatible with BJC Nexus Smart Home

# It's that simple

Only two references. Choosing a product from the Viva range is easy.

## 1 - Choose a feature with the switch colour



Polar White



Moon Silver




Lava Grey

## 2 - Choose the frame colour



Polar White




Stone Grey



Piano Black



Sand Beige



Moon Silver



Lava Grey

# Many different functions

The Viva series offers a wide range of functions to meet today's needs. These include light intensity dimmers and mechanisms for raising and lowering blinds. Choose whichever options you need for your total comfort and enjoy their appealing, colourful designs. All functions are included in all three series.



### Dimmers

Dimmers are the perfect way to create an atmosphere in rooms by adjusting the lighting levels to the desired intensity. The intensity can be increased or decreased. Due to the variety of lamp technologies and power levels, it is essential to use a specific dimmer designed to match each lamp. BJC offers a wide range of dimmers suitable for different lamps and power ratings.



### Dual USB chargers

The Schuko® socket outlet with dual USB Type A and Type C allows you to charge two terminals simultaneously while leaving the actual socket free for use. Quick and easy installation in a standard flush-mounting box.

- Power Delivery (required by the EU from 2024)
- Quick charge
- For standard flush-mounting boxes



### Multimedia

Multimedia connectors are the perfect solution to prevent exposed wiring during installation and for the distribution of electronic devices in any type of installation; whether residential or commercial. The HDMI, RJ45, stereo cable and other outputs can provide separate input and output sources, for efficient connections and uncluttered installations.



### Motion detector

The BJC motion detector is an automatic system for switching lights on and off that does not require direct activation. With its 180° detection angle, it's always ready to detect movement. This practical and convenient safety solution also cuts costs. Its detection capacity reduces unnecessary lighting costs in transit areas and prevents lights being left on by mistake or due to the presence of children.



### LED beacon light

This practical and functional removable emergency beacon light provides you with a handheld lamp for moving around the house when the electrical circuits have been accidentally disconnected due to an outage or breakdown. It lights up like an emergency lamp, making it easy to find in the dark. As it is removable, you can carry it with you as you set off in search of an alternative light source or the distribution board.



### Thermostats

Our thermostats can be used to control and adjust the temperature in each room. Their simple settings allow you to achieve the right level of climate comfort while being energy efficient.




# A series intended to simplify the installation process

It is suitable for both new buildings and refurbishment projects, ensuring seamless integration. Simplify your logistics and purchasing processes with just two references. Not only can the frames be assembled horizontally or vertically, they can also be attached or removed without the need to remove the switch.



### Insert+switch

The metal frame can be adapted to all types of surfaces. Two notches on both sides make it easy to align several mechanisms.

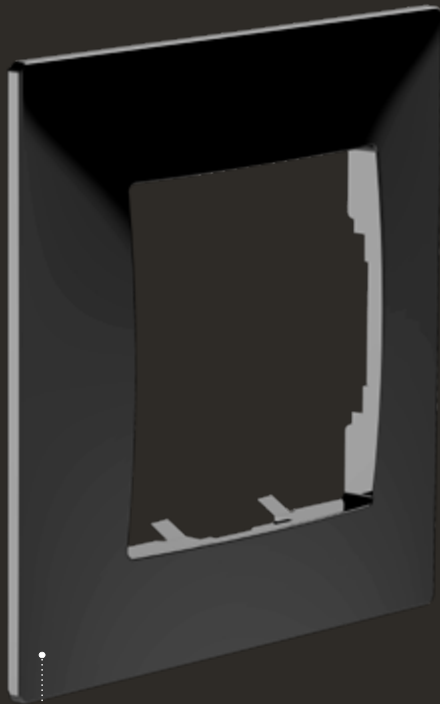

### Frame

The frames fit into the fixing frame using sturdy tabs that are specially designed to compensate for uneven walls, ensuring a solid fit and precise finish.



Reference table for composing basic functions - Viva

| Function                                           | Mechanism + Cover | Frame  |
|----------------------------------------------------|-------------------|--------|
| One-way switch                                     | 23505*            | 23001* |
| Two-way switch                                     | 23506*            | 23001* |
| Intermediate switch                                | 23507*            | 23001* |
| Double one-way switch                              | 23509*            | 23001* |
| Double two-way switch                              | 23510*            | 23001* |
| Push-button, bell symbol                           | 23516-1*          | 23001* |
| Push-button, bulb symbol                           | 23516-2*          | 23001* |
| Rotary dimmer                                      | 21550-X* + 23729* | 23001* |
| Schuko® socket outlet                              | 23524*            | 23001* |
| Schuko® socket outlet + dual USB Type A and Type C | 23526-USBC*       | 23001* |
| TV cover                                           | 23330*            | 23001* |
| Single RJ socket outlet                            | 23682-1*          | 23001* |
| Double RJ socket outlet                            | 23682-2*          | 23001* |
| Blank cover                                        | 23033*            | 23001* |
| Cable output                                       | 23534*            | 23001* |
| Buzzer                                             | 23536*            | 23001* |
| Key card switch                                    | 23068*            | 23001* |




\* For remaining colours, add the extension colour:

| Covers |             |     |                                                                                       | Frames      |     |                                                                                       |  |
|--------|-------------|-----|---------------------------------------------------------------------------------------|-------------|-----|---------------------------------------------------------------------------------------|--|
| Colour | Polar White | -   |  | Polar White | -   |  |  |
|        | Moon Silver | -PL |  | Stone Grey  | -GP |  |  |
|        | Lava Grey   | -GL |  | Piano Black | -NP |  |  |
|        |             |     |                                                                                       | Beige       | -A  |  |  |
|        |             |     |                                                                                       | Moon Silver | -PL |  |  |
|        |             |     |                                                                                       | Lava Grey   | -GL |  |  |

## Switch mechanisms

|                                                                                                                                                  |                             |         |                                                                                                                                                                                                                                                            |                  |                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------------------|
| <b>One-way switch</b><br><b>Two-way switch</b><br><b>Intermediate switch</b><br><b>2 pole one-way switch</b><br><b>2 pole one-way switch 16A</b> |                             |         |    |                  |                  |
| 250 Vac                                                                                                                                          | One-way switch 10 AX        | Pack of | POLAR WHITE                                                                                                                                                                                                                                                | MOON SILVER      | LAVA GREY        |
|                                                                                                                                                  | With claws                  | 10      | <b>23505-X</b>                                                                                                                                                                                                                                             | <b>23505-PLX</b> | <b>23505-GLX</b> |
|                                                                                                                                                  | Without claws               | 10      | <b>23505</b>                                                                                                                                                                                                                                               | <b>23505-PL</b>  | <b>23505-GL</b>  |
|                                                                                                                                                  | Two-way switch 10 AX        |         |                                                                                                                                                                                                                                                            |                  |                  |
|                                                                                                                                                  | With claws                  | 10      | <b>23506-X</b>                                                                                                                                                                                                                                             | <b>23506-PLX</b> | <b>23506-GLX</b> |
|                                                                                                                                                  | Without claws               | 10      | <b>23506</b>                                                                                                                                                                                                                                               | <b>23506-PL</b>  | <b>23506-GL</b>  |
|                                                                                                                                                  | Intermediate switch 10 AX   |         |                                                                                                                                                                                                                                                            |                  |                  |
|                                                                                                                                                  | With claws                  | 6       | <b>23507-X</b>                                                                                                                                                                                                                                             | <b>23507-PLX</b> | <b>23507-GLX</b> |
|                                                                                                                                                  | Without claws               | 10      | <b>23507</b>                                                                                                                                                                                                                                               | <b>23507-PL</b>  | <b>23507-GL</b>  |
|                                                                                                                                                  | 2 pole one-way switch 10 AX | 1       | <b>23508</b>                                                                                                                                                                                                                                               | <b>23508-PL</b>  | <b>23508-GL</b>  |
|                                                                                                                                                  | One-way switch 16 AX        | 6       | <b>23557</b>                                                                                                                                                                                                                                               | <b>23557-PL</b>  | <b>23557-GL</b>  |
|                                                                                                                                                  | Two-way switch 16 AX        | 1       | <b>23559</b>                                                                                                                                                                                                                                               | <b>23559-PL</b>  | <b>23559-GL</b>  |
|                                                                                                                                                  | 2 pole one-way switch 16 AX | 1       | <b>23558</b>                                                                                                                                                                                                                                               | <b>23558-PL</b>  | <b>23558-GL</b>  |
| <b>Double one-way switch</b><br><b>Double two-way switch</b><br><b>Double intermediate switch</b>                                                |                             |         |    |                  |                  |
| 10 AX 250 Vac                                                                                                                                    | Double one-way switch       | Pack of | POLAR WHITE                                                                                                                                                                                                                                                | MOON SILVER      | LAVA GREY        |
|                                                                                                                                                  | With claws                  | 10      | <b>23509-X</b>                                                                                                                                                                                                                                             | <b>23509-PLX</b> | <b>23509-GLX</b> |
|                                                                                                                                                  | Without claws               | 10      | <b>23509</b>                                                                                                                                                                                                                                               | <b>23509-PL</b>  | <b>23509-GL</b>  |
|                                                                                                                                                  | Double two-way switch       |         |                                                                                                                                                                                                                                                            |                  |                  |
|                                                                                                                                                  | With claws                  | 10      | <b>23510-X</b>                                                                                                                                                                                                                                             | <b>23510-PLX</b> | <b>23510-GLX</b> |
|                                                                                                                                                  | Without claws               | 10      | <b>23510</b>                                                                                                                                                                                                                                               | <b>23510-PL</b>  | <b>23510-GL</b>  |
|                                                                                                                                                  | Double intermediate switch  | 1       | <b>23507-2</b>                                                                                                                                                                                                                                             | <b>23507-2PL</b> | <b>23507-2GL</b> |



## Push-button mechanisms

|                                     |               |            |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------------|---------------|------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Push-button NO</b>               |               |            |                                                                                      |                                                                                       |                                                                                       |
| 10 A 250 Vac                        |               |            |                                                                                      |                                                                                       |                                                                                       |
|                                     | With claws    | Pack of 6  |  |  |  |
|                                     | Without claws | 10         | <b>23516-X</b><br><b>23516</b>                                                       | <b>23516-PLX</b><br><b>23516-PL</b>                                                   | <b>23516-GLX</b><br><b>23516-GL</b>                                                   |
| <b>Push-button with bell symbol</b> |               |            |                                                                                      |                                                                                       |                                                                                       |
| 10 A 250 Vac                        |               |            |                                                                                      |                                                                                       |                                                                                       |
|                                     | With claws    | Pack of 6  |  |  |  |
|                                     | Without claws | 10         | <b>23516-1X</b><br><b>23516-1</b>                                                    | <b>23516-1PLX</b><br><b>23516-1PL</b>                                                 | <b>23516-1GLX</b><br><b>23516-1GL</b>                                                 |
| <b>Push-button with bulb symbol</b> |               |            |                                                                                      |                                                                                       |                                                                                       |
| 10 A 250 Vac                        |               |            |                                                                                      |                                                                                       |                                                                                       |
|                                     | With claws    | Pack of 6  |  |  |  |
|                                     | Without claws | 10         | <b>23516-2X</b><br><b>23516-2</b>                                                    | <b>23516-2PLX</b><br><b>23516-2PL</b>                                                 | <b>23516-2GLX</b><br><b>23516-2GL</b>                                                 |
| <b>Double push-button</b>           |               |            |                                                                                      |                                                                                       |                                                                                       |
| 10 A 250 Vac                        |               |            |                                                                                      |                                                                                       |                                                                                       |
|                                     | Without claws | Pack of 10 |  |  |  |
|                                     |               |            | <b>23511</b>                                                                         | <b>23511-PL</b>                                                                       | <b>23511-GL</b>                                                                       |

### One-way switch mechanisms with indicator

|                                                                                                                                                                                                                            |                                            |         |             |            |                                                                                     |                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|---------|-------------|------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 10 A 250 Vac                                                                                                                                                                                                               | One-way switch with indicator              |         |             |            |  |  |
|                                                                                                                                                                                                                            | Two-way switch with indicator              |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Intermediate switch with indicator         |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Push-button with indicator                 |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | 2 pole one-way switch                      |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | One-way switch with indicator              | Pack of | MOON SILVER | LAVA GREY  |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | With claws                                 | 6       | 23505-PLLX  | 23505-GLLX |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Without claws                              | 6       | 23505-PLL   | 23505-GLL  |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Two-way switch with indicator light        |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | With claws                                 | 6       | 23506-PLLX  | 23506-GLLX |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Without claws                              | 6       | 23506-PLL   | 23506-GLL  |                                                                                     |                                                                                     |
| Note: If you need to illuminate any of the other BJC Viva switches with a white button, simply install the corresponding indicator light using the same switch that comes with the product with the standard white switch. | Intermediate switch with indicator         |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | With claws                                 | 1       | 23507-PLLX  | 23507-GLLX |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Without claws                              | 1       | 23507-PLL   | 23507-GLL  |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Push-button with indicator                 |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | With claws                                 | 1       | 23516-PLLX  | 23516-GLLX |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Without claws                              | 1       | 23516-PLL   | 23516-GLL  |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | 2 pole one-way switch                      |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Without claws                              | 1       | 23558-PLL   | 23558-GLL  |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            |                                            |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            |                                            |         |             |            |                                                                                     |                                                                                     |
| 10 A 250 Vac                                                                                                                                                                                                               | Double one-way switch with indicators      |         |             |            |  |  |
|                                                                                                                                                                                                                            | Double intermediate switch with indicators |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Double two-way switch with indicators      |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Double one-way switch with indicators      | Pack of | MOON SILVER | LAVA GREY  |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | With claws                                 | 1       | 23509-PLLX  | 23509-GLLX |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Without claws                              | 1       | 23509-PLL   | 23509-GLL  |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Double intermediate switch with indicators | 1       | 23507-2PLL  | 23507-2GLL |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Double two-way switch with indicators      |         |             |            |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | With claws                                 | 1       | 23510-PLLX  | 23510-GLLX |                                                                                     |                                                                                     |
|                                                                                                                                                                                                                            | Without claws                              | 1       | 23510-PLL   | 23510-GLL  |                                                                                     |                                                                                     |

### Push-button mechanisms with an indicator

|                                                   |  |               |   |                    |                                                                                       |                    |                    |                                                                                       |           |  |
|---------------------------------------------------|--|---------------|---|--------------------|---------------------------------------------------------------------------------------|--------------------|--------------------|---------------------------------------------------------------------------------------|-----------|--|
| <b>Push-button with bell symbol and indicator</b> |  |               |   |                    |  |                    |                    |  |           |  |
| 10 A 250 Vac                                      |  |               |   |                    | Pack of                                                                               | MOON SILVER        | LAVA GREY          |                                                                                       |           |  |
|                                                   |  | With claws    | 1 | <b>23516-1PLLX</b> | 1                                                                                     | <b>23516-1PLL</b>  | <b>23516-1GLLX</b> |                                                                                       |           |  |
|                                                   |  | Without claws | 1 | <b>23516-1PLL</b>  |                                                                                       |                    | <b>23516-1GLL</b>  |                                                                                       |           |  |
| <hr/>                                             |  |               |   |                    |                                                                                       |                    |                    |                                                                                       |           |  |
| <b>Push-button with bulb symbol and indicator</b> |  |               |   |                    |  |                    |                    |  |           |  |
| 10 A 250 Vac                                      |  |               |   |                    | Pack of                                                                               | POLAR WHITE        | Pack of            | MOON SILVER                                                                           | LAVA GREY |  |
|                                                   |  | With claws    | 6 | <b>23516-2LX</b>   | 1                                                                                     | <b>23516-2PLLX</b> |                    | <b>23516-2GLLX</b>                                                                    |           |  |
|                                                   |  | Without claws | 6 | <b>23516-2L</b>    | 1                                                                                     | <b>23516-2PLL</b>  |                    | <b>23516-2GLL</b>                                                                     |           |  |
| <hr/>                                             |  |               |   |                    |                                                                                       |                    |                    |                                                                                       |           |  |
| <b>Push-button with illuminated label holder</b>  |  |               |   |                    |  |                    |                    |  |           |  |
| 10 A 250 Vac                                      |  |               |   |                    | Pack of                                                                               | POLAR WHITE        | MOON SILVER        | LAVA GREY                                                                             |           |  |
|                                                   |  | With claws    | 1 | <b>23516-3LX</b>   |                                                                                       |                    | <b>23516-3PLLX</b> | <b>23516-3GLLX</b>                                                                    |           |  |
|                                                   |  | Without claws | 1 | <b>23516-3L</b>    |                                                                                       |                    | <b>23516-3PLL</b>  | <b>23516-3GLL</b>                                                                     |           |  |

Indicators for one-way switches and push-buttons

|                                                                                   |                                                                                                                                                      |                |                                                                                   |                                                                                            |             |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-------------|
|  | <b>Blue LED indicator light for two-pole control light mechanisms</b><br>230 V~ 1 mA<br><br>Pack of 20                                               | <b>21139-1</b> |  | <b>Load for indicator lights with energy saving and fluorescent lamps</b><br><br>Pack of 1 | <b>3139</b> |
|  | <b>Blue LED indicator light for single pole one-way switch, two-way switch, intermediate switch and push-button</b><br>230 V~ 1 mA<br><br>Pack of 20 | <b>21139-2</b> |                                                                                   |                                                                                            |             |

Mechanisms for controlling blinds

|                                                                                 |         |                                                                                                                                                                                                                                                               |         |                  |                  |
|---------------------------------------------------------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------------|------------------|
| <b>Double one-way switch for blinds</b><br><b>Double push-button for blinds</b> |         |    |         |                  |                  |
| Double one-way switch for blinds                                                | Pack of | POLAR WHITE                                                                                                                                                                                                                                                   | Pack of | MOON SILVER      | LAVA GREY        |
| With claws                                                                      | 6       | <b>23569-X</b>                                                                                                                                                                                                                                                | 1       | <b>23569-PLX</b> | <b>23569-GLX</b> |
| Without claws                                                                   | 6       | <b>23569</b>                                                                                                                                                                                                                                                  | 1       | <b>23569-PL</b>  | <b>23569-GL</b>  |
| Double push-button for blinds                                                   | 1       | <b>23565</b>                                                                                                                                                                                                                                                  | 1       | <b>23565-PL</b>  | <b>23565-GL</b>  |

Timer switch

|                                                                                     |                                                                                                                                                                             |               |                                                                                     |                                                                                                                                                                    |               |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
|  | <b>Multifunction tablet timer switch</b><br>9 functions<br>Power supply voltage 230V 50-60Hz<br>4-wire<br>With neutral<br>Compatible with R, L and C loads<br><br>Pack of 1 | <b>TMP-3H</b> |  | <b>Multifunction tablet timer switch</b><br>Screwless terminal<br>Power supply voltage 230V 50-60Hz<br>4-wire<br>Compatible with R, L and C loads<br><br>Pack of 1 | <b>TMP-4H</b> |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|

Dimmers

|                                                                                      |                                                                                                                                                                                                                                                                                                                                            |                |                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |  |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
|   | <b>A two-way dimmer for high- and low-voltage LED, incandescent and halogen lamps with a magnetic transformer</b><br>Power supply: 230 V / 50 Hz<br>LED: 230V 3-85W<br>Direct halogens: 20-250W<br>Halogens with a ferromagnetic transformer: 20-250VA<br>Fuse: T2AH/250V<br>Screw connection<br>Phase shut-off: Leading-Edge<br>Pack of 1 | <b>21550-X</b> | <div>COVER AND BUTTON</div> <div></div> <div>POLAR WHITE   MOON SILVER   LAVA GREY</div> <div><b>23729</b>   <b>23729-PL</b>   <b>23729-GL</b></div> <div>Pack of   1   1   1</div> |  |  |
|   | <b>A two-way dimmer for high- and low-voltage incandescent and halogen lamps with a magnetic transformer</b><br>Power supply: 230VAC / 50Hz<br>Halogens with a ferromagnetic transformer: 20-500VA<br>Direct halogens: 20-500W<br>Fuse: T2AH/250V<br>Screw connection<br>Phase shut-off: Leading-Edge<br>Pack of 1                         | <b>21553-X</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |  |
|  | <b>Device for controlling luminaires with 1-10V fluorescence regulation</b><br>Power supply: 230VAC 50-60Hz<br>Control voltage: 1-12V<br>Maximum control current: 40mA<br>Load connection: 10A<br>Fuse: F0.8/250V<br>Screw connection<br>Pack of 1                                                                                         | <b>21555-X</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |  |

Dimmers for push-buttons

|                                                                                       |                                                                                                                                                                                                                                                                                          |                |
|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
|  | <b>Universal tablet dimmer with load adjustment</b><br>R, L, C, LED, ESL<br>Power supply voltage 230V - 50/60Hz<br>Consumption: 3W<br>Suitable for 230V halogen lamps, halogen lamps with ferromagnetic trans, halogen lamps with electronic trans. and LED loads 230 V<br><br>Pack of 1 | <b>DIP-RLC</b> |
|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|

Load connection

| LOAD TYPE      |  Mechanism type |  230 V halogen lamps |  Low voltage halogens 12 V (R) with a ferromagnetic transformer (L) |  Low voltage halogens lamps with electronic transformer (C) |  LED Load 230 V |  LED Strips, monochrome (12-48 VDC) |  Dimmable Compact Fluorescent Lamps (CFLs) |  Electronic ballast with 1-10V regulation input |
|----------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>21553-X</b> | Rotary                                                                                               | 20-500W                                                                                                   | 20-500 VA                                                                                                                                                | NO                                                                                                                                               | NO                                                                                                   | NO                                                                                                                       | NO                                                                                                                              | NO                                                                                                                                   |
| <b>21555-X</b> | Rotary                                                                                               | NO                                                                                                        | NO                                                                                                                                                       | NO                                                                                                                                               | NO                                                                                                   | NO                                                                                                                       | NO                                                                                                                              | 1-10 V                                                                                                                               |
| <b>21550-X</b> | Rotary                                                                                               | 20-250W                                                                                                   | 20-250 VA                                                                                                                                                | NO                                                                                                                                               | 3-85W                                                                                                | NO                                                                                                                       | NO                                                                                                                              | NO                                                                                                                                   |
| <b>DIP-RLC</b> | Push-button                                                                                          | 160W                                                                                                      | 160 VA                                                                                                                                                   | 160W                                                                                                                                             | 50-160W                                                                                              | NO                                                                                                                       | 160W                                                                                                                            | NO                                                                                                                                   |

A list of compatibility-tested LED lamps is available at [www.bjc.es/documentation](http://www.bjc.es/documentation)



Motion detector one-way switch

Spherical motion detector, 3-wire mechanism

Contact rating  
(3-wire, relay output):  
Resistive load 2300 W, 10 A max, cos φ =1  
Inductive load 1500 W, 5 A max, cos φ =0.6  
Halogen lamps with a 1000 VA transformer  
Electronic ballasts e.g. 2×36 W (20 max.)  
Compatible with LED loads

Pack of  
1



POLAR WHITE  
23555-3



MOON SILVER  
23555-3PL



LAVA GREY  
23555-3GL

Socket outlets

Schuko® screwed terminals with safety protection

16 A 250 Vac

With claws 10  
Without claws 10

Pack of



POLAR WHITE  
23524-X  
23524



MOON SILVER  
23524-PLX  
23524-PL



LAVA GREY  
23524-GLX  
23524-GL



RED  
23524-R

Pack of  
10

Schuko® socket outlet with dual USB type A and type C charger with fast charging capacity and safety protection

Schuko® socket outlet  
- 230Vac 50Hz, 16A  
- Screwless terminal  
Dual USB charger:  
- 1 USB type A socket and 1 USB type C socket  
- Maximum power: 20W  
- Quick charge Power Delivery USB C: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Quick charge USB A: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Normal charge:  
  - 5V/3.4A when using USB A and USB C at the same time  
  - 5V/2.4A when using USB A or USB C individually  
- Short circuit protection  
- Temperature protection  
Compliant with UNE 20315-1-1/1-2 and EN 62368-1 standards

Pack of  
1



POLAR WHITE  
23526-USBC



MOON SILVER  
23526-USBC-PL



LAVA GREY  
23526-USBC-GL

Socket outlets

Schuko® screwless terminal with safety protection

16 A 250 Vac

Function not compatible with Viva frames installed in vertical position

With claws 10  
Without claws 10

Pack of



POLAR WHITE  
23526-1X  
23526-1



MOON SILVER  
23526-1PLX  
23526-1PL



LAVA GREY  
23526-1GLX  
23526-1GL

Schuko® screwless terminal with cover and safety protection

16 A 250 Vac

With claws 6  
Without claws 6

Pack of



POLAR WHITE  
23526-2X  
23526-2



MOON SILVER  
23526-2PLX  
23526-2PL



LAVA GREY  
23526-2GLX  
23526-2GL

Schuko® IP44 screwless terminal with cover and safety protection

16 A 250 Vac

With claws 1  
Without claws 1

Pack of



POLAR WHITE  
23526-3X  
23526-3



MOON SILVER  
23526-3PLX  
23526-3PL



LAVA GREY  
23526-3GLX  
23526-3GL

French screw terminal socket with safety protection

16 A 250 Vac  
For export only.

With claws 10  
Without claws 10

Pack of



POLAR WHITE  
23572-X  
23572



MOON SILVER  
23572-PLX  
23572-PL



LAVA GREY  
23572-GLX  
23572-GL

French screwed terminal socket with cover and safety protection

16 A 250 Vac  
For export only.

With claws 6  
Without claws 6

Pack of



POLAR WHITE  
23572-2X  
23572-2



MOON SILVER  
23572-2PLX  
23572-2PL



LAVA GREY  
23572-2GLX  
23572-2GL

Socket outlets

French socket outlet dual USB with dual USB type A and type C charger with fast charging capacity and safety protection

Socket outlet:  
- 230Vac 50Hz, 16A  
- Screwless terminal  
Dual USB charger:  
- 1 USB type A socket and 1 USB type C socket  
- Maximum power: 20W  
- Quick charge Power Delivery USB C: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Quick charge USB A: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A  
- Normal charge:  
  - 5V/3.4A when using USB A and USB C at the same time  
  - 5V/2.4A when using USB A or USB C individually  
- Short circuit protection  
- Temperature protection  
Compliant with UNE 20315-1-1/1-2 and EN 62368-1 standards



Double Schuko ® monoblock with safety protection

White (similar to RAL9010)  
For 60mm diameter mounting boxes  
Claw fixing  
Screwed terminals.  
Complete monoblock, no frame mounting required.



Pack of 1    MECHANISM    POLAR WHITE    MOON SILVER    LAVA GREY  
**18572-USBC**    **23772-USBC**    **23772-USBC-PL**    **23772-USBC-GL**



Pack of 1    WHITE  
**EF-23924-4**

25 A socket outlet



**25 A socket outlet**    **2225**  
White  
25 A 250 V~  
85×85×35 mm  
Accepts any 2P + T plug rated at 25 A 250 V~  
S/UNE 20315  
The terminals accept cables up to 10 mm2 cross-section.  
The most suitable mounting box for this socket is  
Ref. 2373-1  
Pack of 5

Plug




**2P+E plug**    **2224-B**  
White  
Pack of 10

RJ type connectivity terminals

RJ11 telephone socket (terminal by insulation piercing)

With claws  
Without claws

Pack of 6  
10



POLAR WHITE    MOON SILVER    LAVA GREY  
**23482-X**    **23482-PLX**    **23482-GLX**  
**23482**    **23482-PL**    **23482-GL**

RJ-45 CAT. 6 socket outlet

Tool-free terminal

Without claws

Pack of 10



POLAR WHITE  
**23586**

Double RJ-45 CAT. 6 socket outlet

Tool-free terminal

Without claws

Pack of 1




POLAR WHITE  
**23586-2**

Adapter for RJ socket outlets

Adapters compatible with RJ 45  
Keystone format connectors

With claws  
Without claws

Pack of 6  
10



POLAR WHITE    MOON SILVER    LAVA GREY  
**23682-1X**    **23682-1PLX**    **23682-1GLX**  
**23682-1**    **23682-1PL**    **23682-1GL**

Double adapter for RJ socket outlets

Adapters compatible with RJ 45 Keystone  
format connectors

With claws  
Without claws

Pack of 6  
6



POLAR WHITE    MOON SILVER    LAVA GREY  
**23682-2X**    **23682-2PLX**    **23682-2GLX**  
**23682-2**    **23682-2PL**    **23682-2GL**



**SCHRACK modular RJ45 connector**  
**Cat. 6**  
**White**    **3186-B**  
Tool-free terminal  
Pack of 25



SW/APC fiber optic solutions

|                                                                                     |                                                                                                                                                                       |           |                                |                                  |                                |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------------------------|----------------------------------|--------------------------------|
|    | <b>Adapter for RJ socket outlets</b><br>Adapters compatible with RJ 45<br>Keystone format connectors                                                                  |           |                                |                                  |                                |
|                                                                                     | With claws                                                                                                                                                            | Pack of 6 | POLAR WHITE<br><b>23682-1X</b> | MOON SILVER<br><b>23682-1PLX</b> | LAVA GREY<br><b>23682-1GLX</b> |
|                                                                                     | Without claws                                                                                                                                                         | 10        | <b>23682-1</b>                 | <b>23682-1PL</b>                 | <b>23682-1GL</b>               |
|  | <b>Double adapter for RJ socket outlets</b><br>Adapters compatible with RJ 45 Keystone<br>format connectors                                                           |           |                                |                                  |                                |
|                                                                                     | With claws                                                                                                                                                            | Pack of 6 | POLAR WHITE<br><b>23682-2X</b> | MOON SILVER<br><b>23682-2PLX</b> | LAVA GREY<br><b>23682-2GLX</b> |
|                                                                                     | Without claws                                                                                                                                                         | 6         | <b>23682-2</b>                 | <b>23682-2PL</b>                 | <b>23682-2GL</b>               |
|  | <b>Coupler for SW/APC-type optical fibre connector</b><br>To be used with adapter 3190 or directly<br>plugged into the RJ cover                                       |           | <b>3191</b>                    |                                  |                                |
|                                                                                     | Pack of 20                                                                                                                                                            |           |                                |                                  |                                |
|  | <b>A Keystone adapter should be used with coupler 3191 in RJ adapters</b><br>For proper use of this adapter, an increased-<br>depth flush-mounting box is recommended |           | <b>3190</b>                    |                                  |                                |
|                                                                                     | Pack of 20                                                                                                                                                            |           |                                |                                  |                                |

Covers for TV

|                           |            |                             |                                |                              |
|---------------------------|------------|-----------------------------|--------------------------------|------------------------------|
| <b>TV cover two holes</b> |            |                             |                                |                              |
|                           | Pack of 10 | POLAR WHITE<br><b>23330</b> | MOON SILVER<br><b>23330-PL</b> | LAVA GREY<br><b>23330-GL</b> |
| <b>TV cover 3 holes</b>   |            |                             |                                |                              |
|                           | Pack of 2  | POLAR WHITE<br><b>23341</b> | MOON SILVER<br><b>23341-PL</b> | LAVA GREY<br><b>23341-GL</b> |

TV-FM-R/TV-SAT mechanisms

|                                                                                       |                                                                                                                    |                               |                                                                                      |                                                                                                                                              |                                        |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
|   | <b>TV_FM socket outlet<br/>Series 2-10<br/>Final outlet<br/>Individual installation</b><br>(Manufacturer: TELEVÉS) | <b>2932<br/>2933<br/>2934</b> |  | <b>R/TV-SAT socket with 2 outputs<br/>Series 6-12<br/>Series 2-5<br/>Final outlet<br/>Individual installation</b><br>(Manufacturer: TELEVÉS) | <b>2921<br/>2922<br/>2923<br/>2924</b> |
|                                                                                       | Pack of 10                                                                                                         |                               |                                                                                      | Pack of 10                                                                                                                                   |                                        |
|  | <b>R/TV-SAT socket with 3 outputs<br/>Individual installation</b><br>(Manufacturer: TELEVÉS)                       | <b>2918</b>                   |                                                                                      |                                                                                                                                              |                                        |
|                                                                                       | Pack of 10                                                                                                         |                               |                                                                                      |                                                                                                                                              |                                        |



Blank cover and cable output

|              |                                                                                     |             |           |
|--------------|-------------------------------------------------------------------------------------|-------------|-----------|
| Blank cover  |  |             |           |
|              | POLAR WHITE                                                                         | MOON SILVER | LAVA GREY |
|              | 23033-X                                                                             | 23033-PLX   | 23033-GLX |
|              |  |             |           |
|              | 23033                                                                               | 23033-PL    | 23033-GL  |
|              |                                                                                     |             |           |
| Cable output |  |             |           |
|              | POLAR WHITE                                                                         | MOON SILVER | LAVA GREY |
|              | 23534-X                                                                             | 23534-PLX   | 23534-GLX |
|              |  |             |           |
|              | 23534                                                                               | 23534-PL    | 23534-GL  |
|              |                                                                                     |             |           |


Other functions

|                                                             |                                                                                       |             |           |
|-------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|-----------|
| Adjustable buzzer<br>230 Vac<br>Intermittent use            |   |             |           |
|                                                             | POLAR WHITE                                                                           | MOON SILVER | LAVA GREY |
|                                                             | 23536-X                                                                               | 23536-PLX   | 23536-GLX |
|                                                             |  |             |           |
|                                                             | 23536                                                                                 | 23536-PL    | 23536-GL  |
|                                                             |                                                                                       |             |           |
| LED beacon light<br>Cold white LED<br>230 Vac 0.4 W<br>5 Lm |  |             |           |
|                                                             | POLAR WHITE                                                                           | MOON SILVER | LAVA GREY |
|                                                             | 23531                                                                                 | 23531-PL    | 23531-GL  |
| There may be visual variations between production batches.  |  |             |           |
|                                                             | 23531                                                                                 | 23531-PL    | 23531-GL  |
|                                                             |                                                                                       |             |           |
| LED beacon light<br>Warm white LED<br>230 Vac 0.4 W<br>5 Lm |  |             |           |
|                                                             | POLAR WHITE                                                                           | MOON SILVER |           |
|                                                             | 23531-3                                                                               | 23531-3PL   |           |
| There may be visual variations between production batches.  |  |             |           |
|                                                             | 23531-3                                                                               | 23531-3PL   |           |
|                                                             |                                                                                       |             |           |

Multimedia connectors

|                                                                                                    |                                                                                       |               |               |
|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------|---------------|
| Type A HDMI connector<br><br>Screwed terminals<br>It is recommended that you solder the cable ends |  |               |               |
|                                                                                                    | POLAR WHITE                                                                           | MOON SILVER   | LAVA GREY     |
|                                                                                                    | 23578-HDMI                                                                            | 23578-HDMI-PL | 23578-HDMI-GL |
|                                                                                                    |  |               |               |
|                                                                                                    | 23578-HDMI                                                                            | 23578-HDMI-PL | 23578-HDMI-GL |
|                                                                                                    |                                                                                       |               |               |

55 x 55 mm mechanisms and frames

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                       |             |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|-----------|
| Key card switch<br>10 A 250 Vac                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |    |             |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | POLAR WHITE                                                                           | MOON SILVER | LAVA GREY |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 59068                                                                                 | 23068-PL    | 23068-GL  |
| Pack of 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |    |             |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 59068                                                                                 | 23068-PL    | 23068-GL  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | This mechanism can only be assembled in 55x55 mm 1-gang frames.                       |             |           |
| Bulb<br>Spare part for key card switch                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |    |             |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 19039-AZ                                                                              |             |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Pack of 1                                                                             |             |           |
| Room thermostat<br>Monitoring and control of temperature in closed rooms<br>Type of sensor: Bi-metal<br>Voltage: 230 V~; 24 V~, 50 Hz<br>Changeover capacity at 230 Vac: 10(4) A, at 24 Vac: 1(1) A<br>Setpoint range: 5 to 30 °C (numerical scale * to 6).                                                                                                                                                                                                                                                                                                                                                                                                                              |    |             |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | POLAR WHITE                                                                           | MOON SILVER | LAVA GREY |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 23144                                                                                 | 23144-PL    | 23144-GL  |
| Pack of 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |   |             |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 23144                                                                                 | 23144-PL    | 23144-GL  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | This mechanism can only be assembled in 55x55 mm 1-gang frames.                       |             |           |
| Heated floor thermostat<br><br>Electronic temperature control for heating systems, for example: electric heated floor systems, bathrooms, ceilings, marble and heated walls.<br>Voltage: 230 V ~, 50 Hz<br>Sensor: external or internal & external (monitor).<br>Floor sensor supplied with the package.<br>Shut-off capacity: 16(2) A<br>Range: 10 to 50 °C (scale of 1 to 5)<br>Indications (LEDs): heating up (Network), and eco mode activated (green).<br>Extension of the sensor: up to 50 m only with 0.5 mm2 cable, double insulated.<br>Note: Ensure that the sensor cabling is protected by insulation. It is not possible to wire the sensor in parallel with AC power lines. |  |             |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | POLAR WHITE                                                                           | MOON SILVER | LAVA GREY |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 23244                                                                                 | 23244-PL    | 23244-GL  |
| Pack of 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |             |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 23244                                                                                 | 23244-PL    | 23244-GL  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | This mechanism can only be assembled in 55x55 mm 1-gang frames.                       |             |           |

55x55 mm 1-gang frame mechanisms

|           |                                                                                     |             |
|-----------|-------------------------------------------------------------------------------------|-------------|
| Pack of 1 |  |             |
|           | POLAR WHITE                                                                         | MOON SILVER |
|           | 23201                                                                               | 23201-PL    |
| Pack of 1 |  |             |
|           | LAVA GREY                                                                           | SAND BEIGE  |
|           | 23201-GL                                                                            | 23201-A     |
| Pack of 1 |  |             |
|           | STONE GREY                                                                          | PIANO BLACK |
|           | 23201-GP                                                                            | 23201-NP    |

Assorted material



**Universal linking mechanism** 2373-I  
Thermoplastic material  
Dimensions: 71x71x43 mm  
  
Pack of 640



**Protective cover** 2374-I  
Allows you to locate the box after plastering  
  
Pack of 1000



**Claws for metal frames** 16-GAR  
Bag with 50 claws and 50 screws to assemble 25 fixing frames



**1-gang flush-mounting box for hollow partition walls** 2341  
  
Pack of 120



**2-gang flush-mounting box for hollow partition walls** 2342  
  
Pack of 60



**3-gang flush-mounting box for hollow partition walls** 2343  
  
Pack of 35



**4-gang flush-mounting box for hollow partition walls** 2344  
  
Pack of 30



**Hole saw with countersink for hollow partition walls** 2158000  
diam. 68 mm / depth. 40 mm  
  
Pack of 1



**Countersink for Ø 68 mm** 5892000  
Tool for flush installation of hollow wall boxes  
  
Pack of 1



**Replacement blades for ref. 5892000** 5893000  
  
Pack of 1



**BJC fixing frame aligner** 3201  
  
Pack of 1

To achieve the designed installation results, the use of these boxes and a hole saw with countersink is recommended.

**Note:** Check the price list published on our website, [www.bjc.es](http://www.bjc.es), for availability of mechanisms with claws identified with -X after the reference.

Surface mounting box

PC-ASA. UV resistant and halogen free.  
Fire resistance. GWT 650°C.  
RoHS.  
Inlets for 22x10, 16x10, 12x7 mm channel and 25, 20 and 16 mm diameter tubes.  
Dimensions of the boxes once composed:  
1-gang: 86x86x43 mm  
2-gang: 157x86x43 mm  
3-gang: 228x86x43 mm  
4-gang: 299x86x43 mm

Pack of 1

**Surface mounting box**




POLAR WHITE MOON SILVER LAVA GREY  
23460 23460-PL 23460-GL




**Modular expansion box**




23461 23461-PL 23461-GL

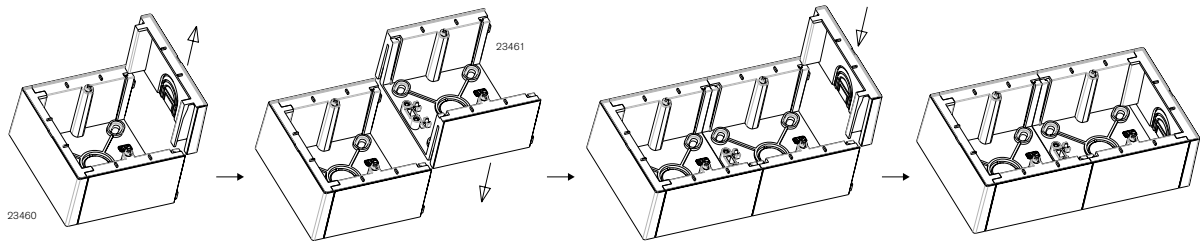

Frames



| POLAR WHITE<br>injected colour                                                            | Pack of | STONE GREY<br>injected colour                                                                | Pack of | PIANO BLACK<br>injected colour                                                               | Pack of | SAND BEIGE<br>injected colour                                                               | Pack of |
|-------------------------------------------------------------------------------------------|---------|----------------------------------------------------------------------------------------------|---------|----------------------------------------------------------------------------------------------|---------|---------------------------------------------------------------------------------------------|---------|
|  23001 | 12      |  23001-GP | 12      |  23001-NP | 12      |  23001-A | 12      |
|  23002 | 12      |  23002-GP | 12      |  23002-NP | 12      |  23002-A | 12      |
|  23003 | 6       |  23003-GP | 6       |  23003-NP | 6       |  23003-A | 6       |
|  23004 | 6       |  23004-GP | 6       |  23004-NP | 6       |  23004-A | 6       |



| MOON SILVER<br>painted colour                                                                  | Pack of | LAVA GREY<br>painted colour                                                                    | Pack of |
|------------------------------------------------------------------------------------------------|---------|------------------------------------------------------------------------------------------------|---------|
|  23001-PL | 12      |  23001-GL | 12      |
|  23002-PL | 12      |  23002-GL | 12      |
|  23003-PL | 6       |  23003-GL | 6       |
|  23004-PL | 6       |  23004-GL | 6       |

**DIMENSIONS**



86 x 86 mm



86 x 157 mm



86 x 228 mm



86 x 299 mm

190 | General Catalogue 155

06 - Mechanism series - Viva | 191

**BJC**

# Coral

## Your first home is there for you to enjoy it

Your first home needs brand new, easy to use and efficient equipment. Choose Coral, an affordable series offering a wide range of options, which will allow you to enjoy the benefits of electricity from day one.



## Because we all like to choose!

Coral

### Standard (frames with built-in embellisher)



White



Moon Silver



Shadow Grey

### Frames for embellishers (in white, beige and painted)



White



Ocean Blue



Science Green



Wheat Yellow



Murano Red



Reflex Brown



Magic Black



Nickel



Matt Nickel



Gold



Matt Gold

### Painted



Pearl Gold



Moon Silver



Shadow Grey



Lava Grey



# It's also the easiest option in terms of installation

The ergonomic structure of the BJC Coral series ensures fast, easy and hassle-free installation.

### Automatic connection of indicator lights

In the Coral series, all switches and push-buttons can be luminous. Simply connect the indicator light to the front of the mechanism.

### Fast and safe connections

All switches are fitted with the latest generation of automatic terminals and independent electrical inputs, thus providing a greater coverage area for the cables. The flexible conductor is connected to the terminal by lightly pressing the disconnection levers, ensuring a secure connection and perfect contact.

### Perfect alignment

The lateral slots in the fixing frames guarantee the perfect alignment and positioning of the frames.



**Mechanism**

Mechanism with silver contacts (900/100), ensuring long life and high performance. Automatic connection with independent contact.

**Frame**

Thermoset decorative frame.

**Embellisher**

12 different embellishers allow you to add a touch of colour to the series. An ingenious solution ensuring a perfect fit in any setting.

**Switch**

Switches and covers manufactured from heat-resistant, self-extinguishing thermoset resin.

Reference table for composing basic functions - Coral

| Function                 | Mechanism           | Switch/Cover | Frame with integrated embellisher | Frame + coloured embellisher |
|--------------------------|---------------------|--------------|-----------------------------------|------------------------------|
| One-way switch           | 16505 + 16-BAST     | 21705*       | 21211*                            | 21011* + 21600-*             |
| Two-way switch           | 16506 + 16-BAST     | 21705*       | 21211*                            | 21011* + 21600-*             |
| Intermediate switch      | 16507 + 16-BAST     | 21705*       | 21211*                            | 21011* + 21600-*             |
| Double one-way switch    | 2 x 16505 + 16-BAST | 21709*       | 21211*                            | 21011* + 21600-*             |
| Double two-way switch    | 2 x 16506 + 16-BAST | 21709*       | 21211*                            | 21011* + 21600-*             |
| Push-button, bell symbol | 16516 + 16-BAST     | 21716*       | 21211*                            | 21011* + 21600-*             |
| Push-button, bulb symbol | 16516 + 16-BAST     | 21717*       | 21211*                            | 21011* + 21600-*             |
| Rotary dimmer            | 21550-X             | 21749        | 21211*                            | 21011* + 21600-*             |
| Schuko® socket outlet    | 21524               | 21724*       | 21211*                            | 21011* + 21600-*             |
| TV cover                 | ---                 | 21330*       | 21211*                            | 21011* + 21600-*             |
| Single RJ socket outlet  | 19582-1             | 21795*       | 21211*                            | 21011* + 21600-*             |
| Double RJ socket outlet  | 19682-1             | 21882*       | 21211*                            | 21011* + 21600-*             |
| Blank cover              | ---                 | 21133*       | 21211*                            | 21011* + 21600-*             |
| Cable output             | 18534               | 21734*       | 21211*                            | 21011* + 21600-*             |
| Buzzer                   | 18536-B             | 21763*       | 21211*                            | 21011* + 21600-*             |
| Key card switch          | 18668               | 21868*       | 21211*                            | 21011* + 21600-*             |

\* For remaining colours, add the extension colour:

| Colour | Switches and covers |     |  | Frames with integrated embellisher (ref. 212* and 213*) |     |  | Frames without integrated embellisher (ref. 212* and 213*) |     |  | Embellishers |     |  |             |      |  |
|--------|---------------------|-----|--|---------------------------------------------------------|-----|--|------------------------------------------------------------|-----|--|--------------|-----|--|-------------|------|--|
|        | White               | -   |  | White                                                   | -   |  | White                                                      | -   |  | White        | -   |  | Magic Black | -NG  |  |
|        | Pearl Gold          | -DP |  | Shadow Grey                                             | -GS |  | Pearl Gold                                                 | -DP |  | Gloss Nickel | -NI |  | Matt Nickel | -NIM |  |
|        | Shadow Grey         | -GS |  |                                                         |     |  | Shadow Grey                                                | -GS |  | Gloss Gold   | -OR |  | Matt Gold   | -ORM |  |
|        | Moon Silver         | -PL |  |                                                         |     |  | Moon Silver                                                | -PL |  |              |     |  |             |      |  |

Switch mechanisms



|                                           |              |
|-------------------------------------------|--------------|
| <b>Single pole one-way switch</b>         | <b>16505</b> |
| <b>Two-way switch</b>                     | <b>16506</b> |
| <b>Intermediate switch</b>                | <b>16507</b> |
| 10 A 250 V~                               |              |
| <b>Single pole one-way switch</b>         | <b>16557</b> |
| <b>Two-way switch</b>                     | <b>16559</b> |
| 16 A 250 V~                               |              |
| <b>Single pole one-way switch control</b> | <b>16605</b> |
| 10 A 250 V~                               |              |

Pack of 20

WHITE

**21705**

Pack of 10

PEARL GOLD

**21705-DP**

LAVA GREY

**21705-GL**

SHADOW GREY

**21705-GS**

MOON SILVER

**21705-PL**

TRANSPARENT DIFFUSER

Pack of 20

WHITE

**21705-L**

Pack of 10

PEARL GOLD

**21705-DPL**

LAVA GREY

**21705-GLL**

SHADOW GREY

**21705-GSL**

MOON SILVER

**21705-PLL**

TRANSPARENT DIFFUSER

Pack of 20

WHITE

**21708**

Pack of 10

PEARL GOLD

**21708-DP**

LAVA GREY

**21708-GL**

SHADOW GREY

**21708-GS**

MOON SILVER

**21708-PL**

TRANSPARENT DIFFUSER

Pack of 20

WHITE

**21708-L**

Pack of 10

PEARL GOLD

**21708-DPL**

LAVA GREY

**21708-GLL**

SHADOW GREY

**21708-GSL**

MOON SILVER

**21708-PLL**

TRANSPARENT DIFFUSER

Push-button mechanisms



|                    |              |
|--------------------|--------------|
| <b>Push-button</b> | <b>16516</b> |
| 10 A 250 V         |              |

Pack of 20

Bell

**21716**

Bulb

**21717**

Pack of 20

WHITE

**21716-L**

Pack of 10

PEARL GOLD

**21716-DPL**

LAVA GREY

**21716-GLL**

SHADOW GREY

**21716-GSL**

MOON SILVER

**21716-PLL**

Pack of 20

WHITE

**21717-L**

Pack of 10

PEARL GOLD

**21717-DPL**

LAVA GREY

**21717-GLL**

SHADOW GREY

**21717-GSL**

MOON SILVER

**21717-PLL**

TRANSPARENT DIFFUSER

Indicator lights



**Blue LED indicator light for 2 pole mechanisms and control light**

**21139-1**

230 V~ 1 mA

Pack of 20



**Blue LED indicator light for single pole one-way switch mechanisms, push-buttons, two-way switches and intermediate switches**

**21139-2**

230 V~ 1 mA

Pack of 20

Push-button mechanisms



|                                   |              |
|-----------------------------------|--------------|
| <b>Double one-way switch</b>      | <b>16505</b> |
| (using 2 one-way switches)        |              |
| <b>Double two-way switch</b>      | <b>16506</b> |
| (using 2 two-way switches)        |              |
| <b>Double intermediate switch</b> | <b>16507</b> |
| (using 2 intermediate switches)   |              |
| <b>Double push-button</b>         | <b>16516</b> |
| (using 2 push-buttons)            |              |
| 10 A 250 V~                       |              |

Pack of 20

WHITE

**21709-L**

Pack of 10

PEARL GOLD

**21709-DPL**

LAVA GREY

**21709-GLL**

SHADOW GREY

**21709-GSL**

MOON SILVER

**21709-PLL**


TRANSPARENT DIFFUSER



**Claws for metal frames**

**16-GAR**


Bag with 50 claws and 50 screws to assemble 25 fixing frames



**16-BAST**

Metal fixing frame

Pack of 20



**16-BAST-G**

Metal fixing frame with claws


Pack of 10

PRESENTATION:

Switch mechanisms (one-way switches, two-way switches, intermediate switches, single pole switches, 2 pole switches, push-buttons and double switch mechanisms) require a corresponding metal frame for installation and mounting.

Example:

For clawless installation of a single pole one-way switch.

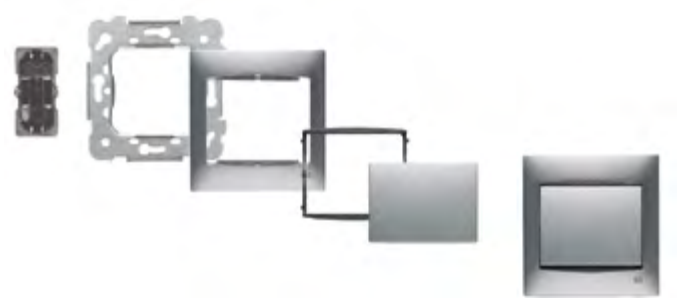

16505 + 16-BAST + 21011-PL + 21600-NIM + 21705-PL Single pole one-way switch

Timer switch

|                                                                                   |                                                                                                                                                            |               |                                                                                   |                                                                                                                                                   |               |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
|  | <b>Multifunction tablet timer switch</b><br>9 functions<br>Power supply voltage 230V 50-60Hz<br>4-wire<br>With neutral<br>Compatible with R, L and C loads | <b>TMP-3H</b> |  | <b>Multifunction tablet timer switch</b><br>Screwless terminal<br>Power supply voltage 230V 50-60Hz<br>4-wire<br>Compatible with R, L and C loads | <b>TMP-4H</b> |
|                                                                                   | Pack of 1                                                                                                                                                  |               |                                                                                   | Pack of 1                                                                                                                                         |               |
|  | <b>Load for indicator lights with energy saving and fluorescent lamps</b><br>Pack of 1                                                                     | <b>3139</b>   |                                                                                   |                                                                                                                                                   |               |

Mechanisms for blinds

|                                                                                     |                                                                                                                                                                                                                                                                           |              |                                                                                     |              |            |                       |            |                               |                              |                                |                                |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------------------------------------------------------------------------|--------------|------------|-----------------------|------------|-------------------------------|------------------------------|--------------------------------|--------------------------------|
|  | <b>Double push-button for blinds</b><br><b>With electrical interlocking device</b>                                                                                                                                                                                        | <b>18565</b> |  | <b>18569</b> | Pack of 20 | WHITE<br><b>21765</b> | Pack of 10 | PEARL GOLD<br><b>21765-DP</b> | LAVA GREY<br><b>21765-GL</b> | SHADOW GREY<br><b>21765-GS</b> | MOON SILVER<br><b>21765-PL</b> |
|                                                                                     | <b>One-way switch for blinds</b><br><b>With electrical and mechanical interlocking device</b><br>Pack of 10                                                                                                                                                               |              |                                                                                     |              |            |                       |            |                               |                              |                                |                                |
|  | <b>Blind controller for installation in a flush-mounting box</b><br>Blind control (insert) for 230 V single-phase motors<br>Max power: 1250 VA<br>Local or centralised operation<br>Operation adjustable from 1 to 120 sec.<br>Can be used with double push-button 18511. | <b>2393</b>  |                                                                                     |              |            |                       |            |                               |                              |                                |                                |
|                                                                                     | Pack of 1                                                                                                                                                                                                                                                                 |              |                                                                                     |              |            |                       |            |                               |                              |                                |                                |

Note: Check the price list published on our website, [www.bjc.es](http://www.bjc.es), for availability of mechanisms with claws identified with -X after the reference.

Dimmer

|                                                                                      |                                                                                                                                                                                                                                                                                                                                            |                |                                                                                     |                                            |                                                                                     |                                                   |                                                                                     |                                     |                                                                                     |                                       |                                                                                     |                                       |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|
|   | <b>A two-way dimmer for high- and low-voltage LED, incandescent and halogen lamps with a magnetic transformer</b><br>Power supply: 230 V / 50 Hz<br>LED: 230V 3-85W<br>Direct halogens: 20-250W<br>Halogens with a ferromagnetic transformer: 20-250VA<br>Fuse: T2AH/250V<br>Screw connection<br>Phase shut-off: Leading-Edge<br>Pack of 1 | <b>21550-X</b> |  | Pack of 10<br><b>WHITE</b><br><b>21749</b> |  | Pack of 1<br><b>PEARL GOLD</b><br><b>21749-DP</b> |  | <b>LAVA GREY</b><br><b>21749-GL</b> |  | <b>SHADOW GREY</b><br><b>21749-GS</b> |  | <b>MOON SILVER</b><br><b>21749-PL</b> |
|   | <b>A two-way dimmer for high- and low-voltage incandescent and halogen lamps with a magnetic transformer</b><br>Power supply: 230VAC / 50Hz<br>Halogens with a ferromagnetic transformer: 20-500VA<br>Direct halogens: 20-500W<br>Fuse: T2AH/250V<br>Screw connection<br>Phase shut-off: Leading-Edge<br>Pack of 1                         | <b>21553-X</b> |                                                                                     |                                            |                                                                                     |                                                   |                                                                                     |                                     |                                                                                     |                                       |                                                                                     |                                       |
|  | <b>Device for controlling luminaires with 1-10V fluorescence regulation</b><br>Power supply: 230VAC 50-60Hz<br>Control voltage: 1-12V<br>Maximum control current: 40mA<br>Load connection: 10A<br>Fuse: F0.8/250V<br>Screw connection<br>Pack of 1                                                                                         | <b>21555-X</b> |                                                                                     |                                            |                                                                                     |                                                   |                                                                                     |                                     |                                                                                     |                                       |                                                                                     |                                       |

Dimmers for push-buttons

|                                                                                       |                                                                                                                                                                                                                                                                            |                |
|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
|  | <b>Universal tablet dimmer with load adjustment</b><br>R, L, C, LED, ESL<br>Power supply voltage 230V - 50/60Hz<br>Consumption: 3W<br>Suitable for 230V halogen lamps, halogen lamps with ferromagnetic trans, halogen lamps with electronic trans. and LED loads<br>230 V | <b>DIP-RLC</b> |
|                                                                                       | Pack of 1                                                                                                                                                                                                                                                                  |                |


Load connection

| LOAD TYPE      | Mechanism type |  230 V halogen lamps |  Low voltage halogens 12 V (R) with a ferromagnetic transformer (L) |  Low voltage halogens lamps with electronic transformer (C) |  LED Load 230 V |  LED Strips, monochrome (12-48 VDC) |  Dimmable Compact Fluorescent Lamps (CFLs) |  Electronic ballast with 1-10V regulation input |
|----------------|----------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>21553-X</b> | Rotary         | 20-500W                                                                                                   | 20-500 VA                                                                                                                                                | NO                                                                                                                                               | NO                                                                                                   | NO                                                                                                                       | NO                                                                                                                              | NO                                                                                                                                   |
| <b>21555-X</b> | Rotary         | NO                                                                                                        | NO                                                                                                                                                       | NO                                                                                                                                               | NO                                                                                                   | NO                                                                                                                       | NO                                                                                                                              | 1-10 V                                                                                                                               |
| <b>21550-X</b> | Rotary         | 20-250W                                                                                                   | 20-250 VA                                                                                                                                                | NO                                                                                                                                               | 3-85W                                                                                                | NO                                                                                                                       | NO                                                                                                                              | NO                                                                                                                                   |
| <b>DIP-RLC</b> | Push-button    | 160W                                                                                                      | 160 VA                                                                                                                                                   | 160W                                                                                                                                             | 50-160W                                                                                              | NO                                                                                                                       | 160W                                                                                                                            | NO                                                                                                                                   |

A list of compatibility-tested LED lamps is available at [www.bjc.es/documentation](http://www.bjc.es/documentation)



Schuko® socket outlet



**Schuko® socket outlet (lateral earthing) with safety protection** **21524**  
Screwed terminals 16 A 250 V

Pack of 10

**Hinged cover for a Schuko® socket outlet (lateral earthing)**

|                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Pack of 20<br><b>WHITE</b><br><b>21724</b>                                        | Pack of 10<br><b>PEARL GOLD</b><br><b>21724-DP</b>                                 | <b>LAVA GREY</b><br><b>21724-GL</b>                                                 | <b>SHADOW GREY</b><br><b>21724-GS</b>                                               | <b>MOON SILVER</b><br><b>21724-PL</b>                                               |

|                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Pack of 10<br><b>WHITE</b><br><b>21813</b>                                        | Pack of 10<br><b>PEARL GOLD</b><br><b>21813-DP</b>                                 | <b>LAVA GREY</b><br><b>21813-GL</b>                                                 | <b>SHADOW GREY</b><br><b>21813-GS</b>                                               | <b>MOON SILVER</b><br><b>21813-PL</b>                                               |

**Special identification (red colour)**

|                                                                                   |
|-----------------------------------------------------------------------------------|
|  |
| Pack of 10<br><b>21724-R</b>                                                      |

**Schuko® socket outlet (lateral earthing) with an integrated safety device and BJC Coral frame**

Screwed terminals 16 A 250 V~

Pack of 10

|                                                                                    |
|------------------------------------------------------------------------------------|
|  |
| Pack of 10<br><b>WHITE</b><br><b>21924</b>                                         |

Assorted mechanisms



**Buzzer with tone regulation**  
**White** **18536-B**  
**Black** **18536**  
**Beige** **18536-A**

230 V~ 50 Hz  
Intermittent Use

Pack of 10

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Pack of 20<br><b>WHITE</b><br><b>21763</b>                                          | Pack of 10<br><b>PEARL GOLD</b><br><b>21763-DP</b>                                  | <b>LAVA GREY</b><br><b>21763-GL</b>                                                 | <b>SHADOW GREY</b><br><b>21763-GS</b>                                               | <b>MOON SILVER</b><br><b>21763-PL</b>                                               |



**Pilot light** **18530**  
Works with E10 3W 230V bulb or equivalent LED.  
The bulb is not supplied with the equipment.

Pack of 10

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Pack of 20<br><b>WHITE</b><br><b>21763</b>                                          | Pack of 10<br><b>PEARL GOLD</b><br><b>21763-DP</b>                                  | <b>LAVA GREY</b><br><b>21763-GL</b>                                                 | <b>SHADOW GREY</b><br><b>21763-GS</b>                                               | <b>MOON SILVER</b><br><b>21763-PL</b>                                               |

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| <b>Red diffuser</b><br><b>18630-R</b>                                               | <b>Amber diffuser</b><br><b>18630-AB</b>                                            | <b>Glass diffuser</b><br><b>18630-C</b>                                             | <b>Green diffuser</b><br><b>18630-V</b>                                             |
| Pack of 10                                                                          | Pack of 10                                                                          | Pack of 10                                                                          | Pack of 10                                                                          |



**LED beacon light**  
**Cold white** **18531**  
**Warm white** **18531-4**  
230 Vac 0.4 W  
5 Lm  
There may be visual variations between production batches.

Pack of 1

|                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |
| Pack of 10<br><b>WHITE</b><br><b>21742</b>                                            | <b>BLACK</b><br><b>21742-N</b>                                                        |

Assorted mechanisms



**Cable output** **18534**

With terminal 3x1.5 mm²  
Cable Ø maximum 10 mm  
Not suitable for claws

Pack of 10

Pack of 20

WHITE  
**21734**

Pack of 10

PEARL GOLD  
**21734-DP**

LAVA GREY  
**21734-GL**

SHADOW GREY  
**21734-GS**

MOON SILVER  
**21734-PL**



**Cord operated push-button** **18521**  
**Cord operated two-way switch** **18598**

Mechanism not suitable for claws  
10 A 250 V~

Pack of 10

Pack of 20

WHITE  
**21734**

Pack of 10

PEARL GOLD  
**21734-DP**

LAVA GREY  
**21734-GL**

SHADOW GREY  
**21734-GS**

MOON SILVER  
**21734-PL**



**Fuse holder 16 A 250 V~** **18528**

For ceramic fuse 8.5x31.5 mm

Pack of 10

Pack of 10

WHITE  
**21728**

Pack of 10

PEARL GOLD  
**21728-DP**

LAVA GREY  
**21728-GL**

SHADOW GREY  
**21728-GS**

MOON SILVER  
**21728-PL**



**Fuse cut-out plug 8.5x31.5 mm**

Spare part for product Ref. 21528

Pack of 10

WHITE  
**21029**

Pack of 10

PEARL GOLD  
**21029-DP**

LAVA GREY  
**21029-GL**

SHADOW GREY  
**21029-GS**

MOON SILVER  
**21029-PL**



**One-way switch for a timed key card** **18668**

125-230 V~ 50/60 Hz  
Resistive loads 10 A~ 16 A  
Inductive loads 8 A cos φ = 0.4  
Switch-off delay 1 min  
LED indicator light  
Mechanism not suitable for claws

Pack of 1

Pack of 20

WHITE  
**21868**

Pack of 10

PEARL GOLD  
**21868-DP**

LAVA GREY  
**21868-GL**

SHADOW GREY  
**21868-GS**

MOON SILVER  
**21868-PL**

Frame for timed key card holder

Pack of 10

WHITE  
**21200**

Pack of 10

PEARL GOLD  
**21200-DP**

LAVA GREY  
**21200-GL**

SHADOW GREY  
**21200-GS**

MOON SILVER  
**21200-PL**

Can only be assembled on this 1-gang frame

Blank cover

Pack of 10

WHITE  
**21133**

Pack of 10

PEARL GOLD  
**21133-DP**

LAVA GREY  
**21133-GL**

SHADOW GREY  
**21133-GS**

MOON SILVER  
**21133-PL**

RJ type connectivity terminals



**Support for 1 standard RJ Keystone connector** **19582-1**

Pack of 10

Pack of 20

WHITE  
**21795**

Pack of 10

PEARL GOLD  
**21795-DP**

LAVA GREY  
**21795-GL**

SHADOW GREY  
**21795-GS**

MOON SILVER  
**21795-PL**



**Cat.6 RJ45 connector** **18586**

Tool-free connection by insulation piercing

Pack of 10



**Support for 2 standard RJ Keystone connectors** **19682-1**

Pack of 10

Pack of 20

WHITE  
**21882**

Pack of 10

PEARL GOLD  
**21882-DP**

LAVA GREY  
**21882-GL**

SHADOW GREY  
**21882-GS**

MOON SILVER  
**21882-PL**



**2 RJ45 CAT. 6 connector** **18586-2**

Tool-free connection by insulation piercing

Pack of 1



**Standard Keystone RJ45 connector** **3186-B**

Cat. 6  
White  
Tool-free terminal

Pack of 25



**A Keystone adapter should be used with coupler 3191 in RJ adapters** **3190**

For proper use of this adapter, an increased-depth flush-mounting box is recommended

Pack of 20



**Coupler for SW/APC-type optical fibre connector** **3191**

To be used with adapter 3190 or directly plugged into the RJ cover

Pack of 20



**RJ11 6-way connector** **19582**

Pack of 10

Pack of 20

WHITE  
**21795**

Pack of 10

PEARL GOLD  
**21795-DP**

LAVA GREY  
**21795-GL**

SHADOW GREY  
**21795-GS**

MOON SILVER  
**21795-PL**

Loudspeaker socket outlets

Loudspeaker socket outlet (mono)

18563-2

WHITE  
21763

PEARL GOLD  
21763-DP

LAVA GREY  
21763-GL

SHADOW GREY  
21763-GS

MOON SILVER  
21763-PL

Rear screwed terminals

Pack of 10

Loudspeaker socket outlet (stereo)

18563-4

Rear screwed terminals

Pack of 10

Wound potentiometer for loudspeakers

3 W 27 Ω  
5 W 47 Ω  
5+5 W 47 W\*  
Not suitable for claws  
\*Requires flush-mounting box  
Ref. 2364  
Pack of 1

18560  
18562  
18564

WHITE  
21760

PEARL GOLD  
21760-DP

LAVA GREY  
21760-GL

SHADOW GREY  
21760-GS

MOON SILVER  
21760-PL

Sound modules

Adapters for SONBEL, EIS, TEZ and SONELCO sound modules

WHITE  
21742

BLACK  
21742-N

46 x 46 mm

Adapter for EGI sound modules

Adapts directly to the sound module fixing frames

WHITE  
21743

BLACK  
21743-N

41 x 41 mm

Room thermostat

Electronic thermostat for heating or cooling

18544

WHITE  
21744

PEARL GOLD  
21744-DP

LAVA GREY  
21744-GL

SHADOW GREY  
21744-GS

MOON SILVER  
21744-PL

230 V~/1900 W cos ϕ = 1  
230 V~/450 W cos ϕ = 0.6  
Regulation from 5° to 30°  
Pack of 1

Motion detector

Spherical motion detector, 3-wire mechanism

18555-3

WHITE  
21763

PEARL GOLD  
21763-DP

LAVA GREY  
21763-GL

SHADOW GREY  
21763-GS

MOON SILVER  
21763-PL

Contact rating (3-wire, relay output):  
Resistive load 2300 W, 10 A max., cos ϕ = 1  
Inductive load 1500 W, 5 A max., cos ϕ = 0.6  
Halogen lamps with a 1000 VA transformer  
Electronic ballasts e.g. 2x36 W (20 max.)  
Compatible with LED loads  
Pack of 1

TV-FM-R/TV-SAT socket outlets

TV-FM socket outlet Series 2-10  
Final outlet  
Individual installation  
(Manufacturer: TELEVÉS)

2932  
2933  
2934

WHITE  
21330

PEARL GOLD  
21330-DP

LAVA GREY  
21330-GL

SHADOW GREY  
21330-GS

MOON SILVER  
21330-PL

Pack of 10

R/TV-SAT socket outlet Series 6-12  
Series 2-5  
Final outlet  
Individual installation  
(Manufacturer: TELEVÉS)

2921  
2922  
2923  
2924

WHITE  
21320

PEARL GOLD  
21320-DP

LAVA GREY  
21320-GL

SHADOW GREY  
21320-GS

MOON SILVER  
21320-PL

Pack of 10

R/TV-SAT socket with 3 outputs  
Individual installation  
(Manufacturer: TELEVÉS)

2918

WHITE  
21341

PEARL GOLD  
21341-DP

LAVA GREY  
21341-GL

SHADOW GREY  
21341-GS

MOON SILVER  
21341-PL

Pack of 10



Frames with integrated intermediate embellisher (without fixing frame)



WHITE

|       |            |
|-------|------------|
| 21211 | Pack of 10 |
| 21212 | 10         |
| 21213 | 5          |
| 21214 | 5          |
| 21312 | 10         |
| 21313 | 5          |
| 21314 | 5          |



SHADOW GREY

|          |            |
|----------|------------|
| 21211-GS | Pack of 10 |
| 21212-GS | 10         |
| 21213-GS | 5          |
| 21214-GS | 5          |
| 21312-GS | 10         |
| 21313-GS | 5          |
| 21314-GS | 5          |



MOON SILVER

|          |            |
|----------|------------|
| 21211-PL | Pack of 10 |
| 21212-PL | 10         |
| 21213-PL | 5          |
| 21214-PL | 5          |
| 21312-PL | 10         |
| 21313-PL | 5          |
| 21314-PL | 5          |

FRAME DIMENSIONS


Both vertically and horizontally



86 x 86 mm



86 x 157 mm



86 x 229 mm



86 x 300 mm

Frames without intermediate embellisher (without fixing frame)



WHITE

|       |            |
|-------|------------|
| 21011 | Pack of 10 |
| 21012 | 10         |
| 21013 | 5          |
| 21014 | 5          |
| 21112 | 10         |
| 21113 | 5          |
| 21114 | 5          |



PEARL GOLD

|          |            |
|----------|------------|
| 21011-DP | Pack of 10 |
| 21012-DP | 10         |
| 21013-DP | 5          |
| 21014-DP | 5          |
| 21112-DP | 10         |
| 21113-DP | 5          |
| 21114-DP | 5          |



LAVA GREY

|          |            |
|----------|------------|
| 21011-GL | Pack of 10 |
| 21012-GL | 10         |
| 21013-GL | 5          |
| 21014-GL | 5          |
| 21112-GL | 10         |
| 21113-GL | 5          |
| 21114-GL | 5          |



SHADOW GREY

|          |            |
|----------|------------|
| 21011-GS | Pack of 10 |
| 21012-GS | 10         |
| 21013-GS | 5          |
| 21014-GS | 5          |
| 21112-GS | 10         |
| 21113-GS | 5          |
| 21114-GS | 5          |



MOON SILVER

|          |            |
|----------|------------|
| 21011-PL | Pack of 10 |
| 21012-PL | 10         |
| 21013-PL | 5          |
| 21014-PL | 5          |
| 21112-PL | 10         |
| 21113-PL | 5          |
| 21114-PL | 5          |

Intermediate embellishers

STANDARD



WHITE  
21600-NI  
Pack of 10

METAL COATING



GLOSS NICKEL  
21600-NI  
Pack of 10



MATT NICKEL  
21600-NIM  
Pack of 10



GLOSS GOLD  
21600-OR  
Pack of 10



MATT GOLD  
21600-ORM  
Pack of 10

METALLIC EFFECT



MAGIC BLACK  
21600-NC  
Pack of 10

Assorted material



**Universal linking mechanism** 2373-1  
Thermoplastic material  
Dimensions: 71x71x43 mm

Pack of 640




**Protective cover** 2374-1  
Allows you to locate the box after plastering

Pack of 1000



**Claws for metal frames** 16-GAR  
Bag with 50 claws and 50 screws to assemble 25 fixing frames



**1-gang flush-mounting box for hollow partition walls** 2341

Pack of 120



**2-gang flush-mounting box for hollow partition walls** 2342

Pack of 60



**3-gang flush-mounting box for hollow partition walls** 2343

Pack of 35



**4-gang flush-mounting box for hollow partition walls** 2344

Pack of 30



**Hole saw with countersink for hollow partition walls** 2158000  
diam. 68 mm / depth. 40 mm

Pack of 1



**Countersink for Ø 68 mm** 5892000  
Tool for flush installation of hollow wall boxes

Pack of 1



**Replacement blades for ref. 5892000** 5893000

Pack of 1



**BJC fixing frame aligner** 3201

Pack of 1

To achieve the designed installation results, the use of these boxes and a hole saw with countersink is recommended.

**Note:** Check the price list published on our website, [www.bjc.es](http://www.bjc.es), for availability of mechanisms with claws identified with -X after the reference.

Surface mounting box

PC-ASA. UV resistant and halogen free.  
Fire resistance. GWT 650°C.  
RoHS.  
Inlets for 22x10, 16x10, 12x7 mm channel and 25, 20 and 16 mm diameter tubes.  
Dimensions of the boxes once composed:  
1-gang: 86x86x43 mm  
2-gang: 157x86x43 mm  
3-gang: 228x86x43 mm  
4-gang: 299x86x43 mm

Pack of 1

**Surface mounting box**



POLAR WHITE  
23460

**Modular expansion box**



MOON SILVER  
23461




LAVA GREY  
23460-GL



23461-PL



23461-GL

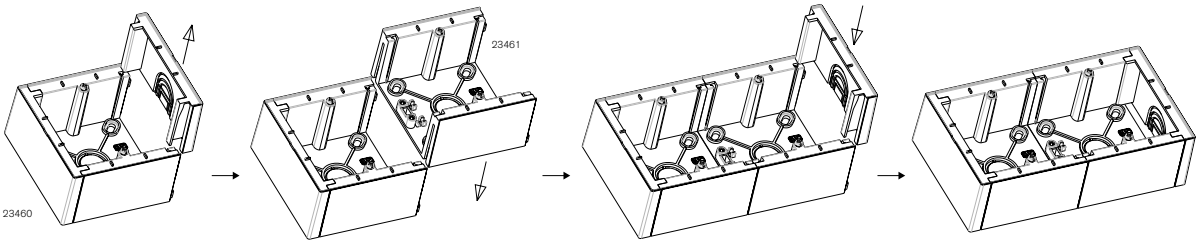

**BJC**

# Sun and Rehabitat

## Light for your first spaces

A comprehensive solution with incredible features at surprising prices. Choose the option that best illuminates your spaces.



## The easiest option

Sol



White

Sol is an affordable series that surprises with its finishes that bring an attractive touch of light to your first spaces.

## Refurbishment with no additional construction work required

### The Rehabitat System

The Rehabitat system allows you to easily and quickly replace your current mechanisms with the latest models, eliminating the need for additional construction work and allowing you to enjoy reliable products with modern designs.



Discover the  
Rehabitat System

Switch mechanisms

|                                                                                    |                                                                                                                                               | NARROW SWITCHES  |                                                                                   |                |                                                                                     | WIDE SWITCHES |                |  |  |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------|---------------|----------------|--|--|
|   | <b>Single pole one-way switch</b>                                                                                                             | <b>16505</b>     |  |                |  |               |                |  |  |
|                                                                                    | <b>Two-way switch</b>                                                                                                                         | <b>16506</b>     |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    | <b>Intermediate switch</b>                                                                                                                    | <b>16507</b>     |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    | <b>Single pole one-way switch control</b>                                                                                                     | <b>16605</b>     |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    | 10 A 250 V~                                                                                                                                   |                  | Pack of                                                                           | WHITE          | Pack of                                                                             | WHITE         |                |  |  |
| Pack of 20                                                                         |                                                                                                                                               | Without diffuser | 20                                                                                | <b>16705</b>   | Without diffuser                                                                    | 20            | <b>17705</b>   |  |  |
|                                                                                    |                                                                                                                                               | With diffuser    | 20                                                                                | <b>16705-L</b> | With diffuser                                                                       | 20            | <b>17705-L</b> |  |  |
|   | <b>Single pole one-way switch</b>                                                                                                             | <b>16557</b>     |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    | <b>Two-way switch</b>                                                                                                                         | <b>16559</b>     |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    | 16 A 250 V~                                                                                                                                   |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    | Pack of 20                                                                                                                                    |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|  | <b>2 pole one-way switch</b>                                                                                                                  | <b>16508</b>     |  |                |  |               |                |  |  |
|                                                                                    | 10 A 250 V~                                                                                                                                   |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    | Pack of 20                                                                                                                                    |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    | The same mechanism can be used for a bipolar switch with light or a bipolar control light. The only change is the installation wiring diagram |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  | Pack of                                                                           | WHITE          | Pack of                                                                             | WHITE         |                |  |  |
|                                                                                    |                                                                                                                                               | Without diffuser | 20                                                                                | <b>16708</b>   | Without diffuser                                                                    | 20            | <b>17708</b>   |  |  |
|                                                                                    |                                                                                                                                               | With diffuser    | 20                                                                                | <b>16708-L</b> | With diffuser                                                                       | 20            | <b>17708-L</b> |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |
|                                                                                    |                                                                                                                                               |                  |                                                                                   |                |                                                                                     |               |                |  |  |



Socket outlets with safety protection



**Schuko® socket outlet (lateral earthing) with built-in safety protection**  
Screwed terminals  
16 A 250 V  
Pack of 10

16524

WIDE COVERS



Pack of 10 WHITE  
**16724**  
RED  
**16724-R**

Assembled products  
Socket outlets

**2P mixed socket outlet For European plugs**  
10/16 A 250 V~  
**For American plugs**  
15 A 125 V~  
For export only



Pack of 20 WHITE  
**16090**

**Mixed Schuko® socket outlet For European plugs**  
10/16 A 250 V~  
**For American plugs**  
15 A 125 V~  
For export only



Pack of 20 WHITE  
**16190**

Dimmer

Dimmer for Sol Teide and Room frames

A two-way dimmer for high- and low-voltage LED, incandescent and halogen lamps with a magnetic transformer.  
· Power supply: 230 V / 50 Hz  
· LED: 230V 3-85W  
· Direct halogens: 20-250W  
· Halogens with a ferromagnetic transformer: 20-250VA  
· Fuse: T2AH/250V  
· Screw connection  
· Phase shut-off: Leading-Edge



Pack of 1 WHITE  
**16038**

Pack of 1

Assembled products various mechanisms

Cable output

With clamping flange up to 8 mm Ø



Pack of 20 WHITE  
**16034**



Pack of 10 WHITE  
**17034**

Voice and Data connectors and adapters

NARROW COVERS

WIDE COVERS

**6-way RJ11 female connector telephone jack**  
For BAT in basic telephony networks (screwed terminals)



Pack of 20 WHITE  
**16082**



Pack of 10 WHITE  
**17082**

**8-way RJ45 Cat. 5E female connector (ISO 8877)**  
For BAT in Integrated Services Digital Networks (ISDN) and computer applications  
Screwless terminal  
**Only for BJC Sol 1-gang frames**



Pack of 20 WHITE  
**16095**



Pack of 10 WHITE  
**17095**

Voice and Data connectors and adapters

**Cover for adapting 2 RJ45 connectors (AMP, ITT, etc.) to BJC Sol frames**



Pack of 10 WHITE  
**17897**

Wound potentiometer for loudspeakers



**Potentiometer 3 W 27 Ω** 18560  
**Potentiometer 5 W 47 Ω** 18562  
**\*Potentiometer 5+5 W 47 W** 18564

\*Requires a special depth flush-mounting box

Not suitable for Rehabitat frames

Pack of 1



Pack of 10 WHITE  
**17760**


Assorted mechanisms

|                                                                                   |                                                                                                            | NARROW COVERS                                                                                                          | WIDE COVERS                                                                                                             |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
|  | <b>Short circuit</b><br>For 5x20 mm glass fuse                                                             | <br>Pack of 20 WHITE<br><b>16028</b>  | <br>Pack of 10 WHITE<br><b>17028</b> |
|                                                                                   | <b>Fuse-holder cap</b><br>Spare parts for products<br>Ref. 16028 y 17028                                   | <br>Pack of 10 WHITE<br><b>14129</b>  | <br>Pack of 10 WHITE<br><b>14129</b> |
|                                                                                   | <b>5x20 mm glass fuse</b><br><b>4 A</b> 498-4<br><b>6 A</b> 498-6<br><b>10 A</b> 498-10<br><br>Pack of 100 |                                                                                                                        |                                                                                                                         |
|                                                                                   | <b>Blank cover</b>                                                                                         | <br>Pack of 20 WHITE<br><b>16033</b> |                                                                                                                         |

TV-FM-R/TV-SAT socket outlets

|                                                                                     |                                                                                                                                                                                | WIDE COVERS                                                                                                               |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
|  | <b>TV_FM socket outlet</b><br><b>Series 2-10</b><br><b>Final outlet</b><br><b>Individual installation</b><br><br>(Manufacturer: TELEVÉS)<br>Pack of 10                         | <br>Pack of 10 WHITE<br><b>16330</b> |
|                                                                                     |                                                                                                                                                                                | <br>Pack of 10 WHITE<br><b>16331</b> |
|  | <b>R/TV-SAT socket outlet</b><br><b>Series 6-12</b><br><b>Series 2-5</b><br><b>Final outlet</b><br><b>Individual installation</b><br><br>(Manufacturer: TELEVÉS)<br>Pack of 10 | <br>Pack of 10 WHITE<br><b>16320</b> |
|                                                                                     |                                                                                                                                                                                | <br>Pack of 10 WHITE<br><b>16321</b> |

Frames with fixing frame for 60mm European boxes

|                                                                                                                                                                                                                                                                                                                                                                      |                                                                | WITHOUT CLAWS                           | WITH CLAWS                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------|-----------------------------------------|
| <br><br><br><br><br><br> | <b>For 1 narrow module</b><br><br>85x85 mm                     | WHITE<br><b>16310</b><br><br>Pack of 10 | WHITE<br><b>16000</b><br><br>Pack of 10 |
|                                                                                                                                                                                                                                                                                                                                                                      | <b>For 2 narrow modules or 1 wide module</b><br><br>85x85 mm   | <b>16311</b><br><br>Pack of 10          | <b>16001</b><br><br>Pack of 10          |
|                                                                                                                                                                                                                                                                                                                                                                      | <b>For 4 narrow modules or 2 wide modules</b><br><br>85x157 mm | <b>16312</b><br><br>Pack of 10          | <b>16002</b><br><br>Pack of 10          |
|                                                                                                                                                                                                                                                                                                                                                                      | <b>For 6 narrow modules or 3 wide modules</b><br><br>85x228 mm | <b>16313</b><br><br>Pack of 5           | <b>16003</b><br><br>Pack of 5           |
| <br><br>                                                                                                                                                                                      | <b>For 1 narrow module</b><br><br>85x120 mm                    | WHITE<br><b>16341</b><br><br>Pack of 10 |                                         |
|                                                                                                                                                                                                                                                                                                                                                                      | <b>For 2 narrow modules or 1 wide module</b><br><br>85x120 mm  | <b>16342</b><br><br>Pack of 10          |                                         |







Frames with fixing frame and without claws for American boxes

|                                                                                                                                                                                                                                                                                 |                                                                                                     |                                         |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------|--|
| <br><br><br><br> | <b>For 1 narrow module</b><br><br>85x120 mm<br>For a 4x2" box                                       | WHITE<br><b>16351</b><br><br>Pack of 10 |  |
|                                                                                                                                                                                                                                                                                 | <b>For 2 narrow modules or 1 wide module</b><br><br>85x120 mm<br>For a 4x2" box                     | <b>16352</b><br><br>Pack of 10          |  |
|                                                                                                                                                                                                                                                                                 | <b>For 3 narrow modules or 1 wide module and 1 narrow module</b><br><br>85x120 mm<br>For a 4x2" box | <b>16353</b><br><br>Pack of 10          |  |

Rehabitat frames










Frames with a fixing frame and frame for star series or similar boxes

|                                                                                                                                                    |                                                                                                                                                                                                                                                                                   |                                                                                      |                                               |                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                   | <p>For 1 narrow module</p> <p>96x98 mm<br/>For a 362-1 BJC box or similar</p> <p>Assembly consisting of fixing frame, support frame and frame</p> <p>Frames compatible with Sol series mechanisms</p>                                                                             |    | <p>WHITE<br/><b>16661-B</b><br/>Pack of 1</p> |                                                                          |
|                                                                   | <p>For 1 narrow module:<br/>only switches, Cable outputs, telephone sockets and circuit breakers</p> <p>96x98 mm<br/>For a 362-1 BJC box or similar</p> <p>Set consisting of 2 fixing frames, a support frame and a frame</p> <p>Frames compatible with Sol series mechanisms</p> |    | <p>WHITE<br/><b>16662-B</b><br/>Pack of 1</p> |                                                                                                                                                             |
|                                                                 | <p>For 2 narrow modules or 1 wide module</p> <p>96x98 mm<br/>For a 362-2 BJC box or similar</p> <p>Set consisting of 2 fixing frames, a support frame and a frame</p> <p>Frames compatible with Sol series mechanisms</p>                                                         |  | <p>WHITE<br/><b>16662-B</b><br/>Pack of 1</p> |                                                                                                                                                             |
|                                                                 | <p>For 3 narrow modules or 1 wide module and 1 narrow module</p> <p>132x98 mm<br/>For a 362-3 BJC box or similar</p> <p>Assembly consisting of fixing frame, support frame and frame</p> <p>Frames compatible with Sol series mechanisms</p>                                      |  | <p>WHITE<br/><b>16663-B</b><br/>Pack of 1</p> |  <p><b>16668</b><br/>Special fixing frame for box Compact (3-gang)</p> |
|                                                                 | <p>For 4 narrow modules or 2 wide modules</p> <p>132x98 mm<br/>For a 362-4 BJC box or similar</p> <p>Assembly consisting of fixing frame, support frame and frame</p> <p>Frames compatible with Sol series mechanisms</p>                                                         |  | <p>WHITE<br/><b>16664-B</b><br/>Pack of 1</p> |                                                                                                                                                             |
| <p>Some installed boxes by other brands require minor adjustments to accommodate Sol Teide mechanisms</p> <p>Frames for Sol series mechanisms.</p> |                                                                                                                                                                                                                                                                                   |                                                                                      |                                               |                                                                                                                                                             |

Rehabitat frames

Refurbishment without building work for systems with linear or similar type frames

|                                                                                       |                                                                                                                                                                                                                             |                                                                                       |                                               |                                                                                     |
|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------|
|    | <p>For 2 narrow modules or 1 wide module</p> <p>120x85 mm<br/>For a 906 BJC box or similar</p> <p>Assembly consisting of fixing frame and frame</p> <p>Frames compatible with Sol series mechanisms</p>                     |    | <p>WHITE<br/><b>16652-B</b><br/>Pack of 1</p> |  |
|    | <p>For 3 narrow modules or 1 wide module and 1 narrow module</p> <p>120x85 mm<br/>For a 907 BJC box or similar</p> <p>Assembly consisting of fixing frame and frame</p> <p>Frames compatible with Sol series mechanisms</p> |    | <p>WHITE<br/><b>16653-B</b><br/>Pack of 1</p> |                                                                                     |
|  | <p>For 4 narrow modules or 2 wide modules</p> <p>120x85 mm<br/>For a 907 BJC box or similar</p> <p>Assembly consisting of fixing frame and frame</p> <p>Frames compatible with Sol series mechanisms</p>                    |  | <p>WHITE<br/><b>16654-B</b><br/>Pack of 1</p> |                                                                                     |
|  | <p>For 6 narrow modules or 3 wide modules</p> <p>190x85 mm<br/>For a 908 BJC box or similar</p> <p>Assembly consisting of fixing frame and frame</p> <p>Frames compatible with Sol series mechanisms</p>                    |  | <p>WHITE<br/><b>16656-B</b><br/>Pack of 1</p> |                                                                                     |
|  | <p>The replacement of vertically installed linear frames requires the mechanisms to be assembled horizontally</p>                                                                                                           | Frames for Sol series mechanisms                                                      |                                               |                                                                                     |



# BJC

## Relays

Complete solutions  
for control, protection,  
electrical automation and  
energy efficiency





# Complete solutions for control, protection, electrical automation and energy efficiency

As a specialist manufacturer, we offer **comprehensive solutions for control, protection and automation in electrical systems**. Our relays offer outstanding reliability, accuracy and ease of integration into residential, tertiary and industrial systems. The range includes compact models with zero-crossing technology for safer and more efficient changeovers, and indicator LED lights for ease of installation and diagnostics. Some devices feature Wi-Fi connectivity, enabling remote programming and control from anywhere, bringing added value to projects that require efficiency and adaptability.

## RESIDENTIAL



## INDUSTRIAL AND TERTIARY



### TIMING

Timer relays enable precise control of the activation and deactivation times of electrical equipment, improving system efficiency and automation. Available in single-function, multifunction, cycling, and star/delta starter versions, they are used for applications such as delayed start-ups, automatic shutdowns, and electrical process sequences.



### TIMER SWITCHES

Designed to automatically programme the switching on and off of electrical devices, they offer an effective energy-saving solution. Our range features analogue and digital versions, some with astronomical functions and Wi-Fi connectivity for remote management. They are ideal for lighting, air conditioning, irrigation, and shop windows.



### STAIRCASE TIMER SWITCHES

They control the lighting switch-on time in transit areas, ensuring comfort and energy efficiency. They are activated by push-buttons, making them suitable for stairways, corridors, garages, and communal areas.



### TWILIGHT SWITCHES

These devices switch the lighting on or off depending on the ambient light level, without the need for time programming. They are mainly used in outdoor areas such as gardens, car parks, or on façades.



### AUXILIARY AND POWER RELAYS

Essential for extending or adapting the functionality of electrical systems. They are used in load switching, contact extensions, motor control and signals in control and protection systems.



### LIGHT DIMMERS

These allow you to adjust the light intensity to create the desired ambience and improve energy efficiency. They are suitable for homes, offices, restaurants, and home automation projects.



### IMPULSE RELAYS

These allow a light source to be operated from multiple push-buttons without complex wiring, making them a practical and safe solution for installations in buildings and communal areas.



### PROTECTION AND MONITORING

Ensures the safe and continuous operation of your electrical systems. Our range of monitoring devices monitor phase sequence and phase failure, as well as detecting overvoltages in three-phase networks, helping to prevent failures, detect anomalies and keep all key parameters under control.



Relays

BJC

Timing

|                                                                                     |                                                                                                                                                                                                                                                                                     |                                                                                    |                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <div><b>Single-function timer relay</b> <b>TM-116-UNI-M</b></div> <div>Universal power supply: 12-240 V AC/DC 50/60 Hz<br/>16 A switched output<br/>Switch-off delay from 0.1 seconds to 100 hours.</div> <div>Pack of 1</div>                                                      |   | <div><b>Multifunction timer relay</b> <b>TM-116-UNI</b><br/><b>Multifunction timer relay</b> <b>TM-116</b></div> <div>TM-116-UNI: Universal power supply: 12-240 V AC/DC 50/60 Hz<br/>TM-116: Power supply at 230 V AC 50/60 Hz<br/>16 A switched output<br/>10 functions<br/>Programmable time from 0.1 seconds to 10 days.</div> <div>Pack of 1</div> |
|    | <div><b>Multifunction timer relay</b> <b>TM-308-UNI</b></div> <div>Universal power supply: 12-240 V AC/DC 50/60 Hz<br/>3 switched outputs: 1 x 16 A and 2 x 8 A.<br/>10 functions<br/>Programmable time from 0.1 seconds to 10 days.</div> <div>Pack of 1</div>                     |   | <div><b>Timer starter relay</b> <b>TME-2T-UNI</b></div> <div>Star-delta motor starter.<br/>Universal power supply: 12-240 V AC/DC 50/60 Hz<br/>2 x 16 A switched outputs<br/>Programmable time: t1 from 0.1 seconds to 100 days (star), t2 from 0.1 to 1 seconds (delta)</div> <div>Pack of 1</div>                                                     |
|   | <div><b>Asymmetric cycling relay</b> <b>TME-2H-UNI</b></div> <div>Universal power supply: 12-240 V AC/DC 50/60 Hz<br/>1 x 16 A switched output<br/>2 functions: by impulse time or interruption time<br/>Programmable time: from 0.1 seconds to 100 days</div> <div>Pack of 1</div> |  | <div><b>Multifunction tablet timer switch</b> <b>TMP-3H</b></div> <div>Power supply at 230 V AC 50/60 Hz<br/>1 x 16 A output<br/>9 functions with time programmable from 0.1 seconds to 10 days.<br/>Not compatible with capacitive loads</div> <div>Pack of 1</div>                                                                                    |
|  | <div><b>Multifunction tablet timer switch</b> <b>TMP-4H</b></div> <div>Power supply at 230 V AC 50/60 Hz<br/>1 x 10 A output<br/>10 functions with time programmable from 0.1 seconds to 10 days.<br/>Compatible with all load types</div> <div>Pack of 1</div>                     |                                                                                    |                                                                                                                                                                                                                                                                                                                                                         |

Relays for hotels

|                                                                                     |                                                                                                                                                                                                                                                                                                                        |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <div><b>Energy-saving timer switch relay</b> <b>TMA-101-UNI</b></div> <div>Universal power supply: 12-240 V AC/DC 50-60 Hz<br/>16 A switched output<br/>4 operation modes<br/>2 inputs: magnetic door contact and motion detector (not supplied)<br/>Switch-off delay from 1 to 50 minutes.</div> <div>Pack of 1</div> |  | <div><b>Energy-saving timer switch relay</b> <b>TMA-102-UNI</b></div> <div>Power supply: 100-240 V AC, 145-335 V DC 50-60 Hz<br/>6 x 10 A outputs<br/>10 operation modes<br/>Inputs: master, key card switch, magnetic door contact, motion detector (not supplied)<br/>6 inputs for one-way switches/push-buttons<br/>Switch-off delay from 1 to 50 minutes</div> <div>Pack of 1</div> |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Timer switches

|                                                                                     |                                                                                                                                                                                                                                                                                                                                                               |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <div><b>Digital timer switch, daily, weekly, monthly and yearly programme</b> <b>IH-1</b><br/><b>IH-2</b></div> <div>Power supply at 230 V AC 50/60 Hz<br/>IH1: 1 x 16 A switched output<br/>IH2: 12 x 16 A switched outputs, 4 operation modes: Auto, manual, random, holiday<br/>Daily, weekly, monthly, and yearly programming.</div> <div>Pack of 1</div> |  | <div><b>Astronomical digital timer switch with Wi-Fi connection</b> <b>IH-1-ASTRO-WI</b><br/><b>IH-2-ASTRO-WI</b></div> <div>Universal power supply: 24-240 V AC/DC 50/60 Hz<br/>IH-1-ASTRO-Wi: 1 x 16 A switched output<br/>IH-2-ASTRO-Wi: 2 x 16 A switched outputs<br/>Memory powered by a 3 V CR2032 battery (supplied)<br/>Up to 200 programmes, daily, weekly, monthly, yearly and astronomical programming.<br/>Programming via web server using Wi-Fi connection.</div> <div>Pack of 1</div> |
|  | <div><b>Timer switch with Wi-Fi, no display or buttons</b> <b>IH-1-ASTRO-WI/B</b></div> <div>Power supply: 110-230 V AC 50/60 Hz<br/>1 x 16 A switched output<br/>Up to 200 programmes, daily, weekly, monthly, yearly and astronomical programming.<br/>Programming via web server using Wi-Fi.</div> <div>Pack of 1</div>                                   |  | <div><b>Analogue timer switch with daily programme</b> <b>IHA-1-DIA</b></div> <div>Power supply: 230 V AC 50/60 Hz<br/>1 x 16 A output<br/>Daily programme at 15-minute intervals.<br/>Internal battery with up to 100 hours of backup power after a power failure</div> <div>Pack of 1</div>                                                                                                                                                                                                        |



Download our relay catalogue



Relays

Staircase timer switches



Staircase timer switch

MI-16

Power supply: 230 V AC 50/60 Hz  
1 x 16 A switched output  
3 functions: permanently on, automatic and permanently off.  
Adjustable time from 0.5 to 10 minutes.

Pack of 1

Twilight switches



Analogue twilight switch

IC-16-EXT

Power supply: 230 V AC 50/60 Hz  
1 x 16 A switchable output  
Three settings: 1-100 lx (twilight), 100-50000 lx (multifunction) and connection testing.  
Lighting control measurement with external IP55 sensor (supplied).

Pack of 1

Impulse relays



Impulse relay

TE-116-UNI

Universal power supply: 12-240 V AC/DC 50/60 Hz  
1 x 16 A switched output.  
Can be controlled from multiple push-buttons in parallel.  
Memory of the last state after a power failure.

Pack of 1

Auxiliary and power relays



Auxiliary power relay

RE-116-R

Power supply: 24-230 V AC/DC 50/60 Hz  
1 x 16 A switched output

Pack of 1



Auxiliary power relay

RE-316-R

Power supply: 230 V AC 50/60 Hz  
3 x 16 A switched outputs

Pack of 1



Auxiliary power relay

RE-308-R

Power supply: 24-230 V AC/DC 50/60 Hz  
3 x 8 A switched outputs

Pack of 1

Protection and monitoring



Upper and lower voltage monitoring relay

MV31

Power supply: 48-276 V AC/DC 50/60 Hz  
1 x 16 A switched output  
9 overvoltage, undervoltage and window functions.  
Delay time setting from 0.5 to 10 seconds.

Pack of 1



3-phase sequence and failure monitoring relay, no neutral

MV55

Power supply: 3x400 V 50/60 Hz  
1 x 8 A switched output  
Delay time setting from 0.1 to 10 seconds

Pack of 1



3-phase voltage monitoring relay, no neutral

MV54

Power supply: 3x400 V 50/60 Hz  
1 x 8 A switched output.  
Delay time setting from 0.1 to 10 seconds.

Pack of 1



3-phase sequence and failure monitoring relay, with neutral

MV55N

Power supply: 3x400 V / 230 V 50/60 Hz  
1 x 8 A switched output  
Delay time setting from 0.1 to 10 seconds  
Three-phase and neutral interruption monitoring.

Pack of 1



Voltage monitoring relay, 3-phase sequence and failure, with neutral

MV54N

Power supply: 3x400 V / 230 V 50/60 Hz  
1 x 8 A switched output.  
Delay time setting from 0.1 to 10 seconds.  
Three-phase and neutral interruption monitoring.

Pack of 1



Level monitoring relay for 1 or 2 liquids

MNS-UNI

Universal power supply: 24-230 V AC/DC 50/60 Hz  
1 x 8 A switched output  
Configurable 1- or 2-level monitoring.  
2 functions, filling and emptying.  
Output time delay can be set from 0.5 to 10 seconds.

Pack of 1

Sensors for liquid level monitors



Liquid level sensor

SM-1N

Liquid control sensor.  
Sensor material: stainless steel  
Connection cable not supplied

Pack of 1



Liquid level sensor

SM-3

Sensor designed to be installed on the wall or lid of a fluid tank.  
Stainless steel electrode, PTFE electrode insulation.  
Connection cable supplied.

Pack of 1



Liquid level sensor

SM-2

Level sensor for electrically conductive fluids and mechanically contaminated fluids at temperatures from 1°C to +80°C  
Stainless steel electrode with PVC sheath  
Connection cable not supplied

Pack of 1

BJC

# Assorted material



## Assorted material

BJC

### Sound modules



#### Surface buzzer

Anti-parasite  
Alternates only  
230 V~  
Adjustable  
Intermittent use  
Pack of 10

WHITE  
610-B

### Base and plug



#### 25 A socket outlet

25 A 250 V~  
85x85x35 mm  
Accepts any 2P + T plug rated at 25 A 250 V~ S/UNE 20315  
The terminals accept cables up to 10 mm<sup>2</sup> cross-section  
The most suitable box for this socket outlet is Ref. 2373-I  
Pack of 5

WHITE  
2225



#### Schuko® plug

25 A 250 V~

Pack of 10

WHITE  
2224-B

### Viva and Coral surface mounting box

PC-ASA. UV resistant and halogen free.  
Fire resistance. GWT 650°C.  
RoHS.

Inlets for 22x10, 16x10, 12x7 mm channel and 25, 20 and 16 mm diameter tubes.

Dimensions of the boxes once composed:

1-gang: 86x86x43 mm

2-gang: 157x86x43 mm

3-gang: 228x86x43 mm

4-gang: 299x86x43 mm

Pack of 1

#### Surface mounting box



POLAR WHITE  
23460



MOON SILVER  
23460-PL



LAVA GREY  
23460-GL




23461



23461-PL




23461-GL

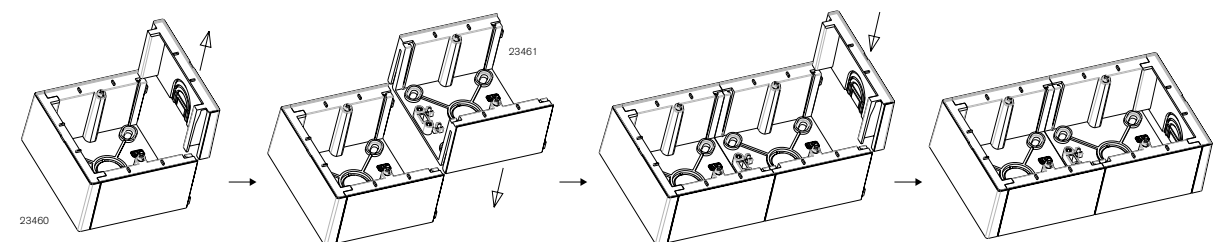

Assorted material

|                                                                                                   |                                                                                                                                                                                                                                                                                                                            |                                                                                     |                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <div>7143</div> | <div><b>Universal linking mechanism</b></div> <div>2373-1</div> <div>With Ø60mm screws<br/>Thermoplastic material<br/>Dimensions: 71x71x43 mm</div> <div>Pack of 640</div> <div>For flush-mounting into solid non-combustible walls and ceilings after construction<br/>Temperature during installation -5 °C +60 °C</div> |    | <div><b>Protective cover</b></div> <div>2374-1</div> <div>Allows you to locate the boxes after plastering<br/>Pack of 1000</div>                     |
|                  | <div><b>1-gang flush-mounting box for hollow partition walls</b></div> <div>2341</div> <div>Pack of 120</div>                                                                                                                                                                                                              |    | <div><b>2-gang flush-mounting box for hollow partition walls</b></div> <div>2342</div> <div>Pack of 60</div>                                         |
|                  | <div><b>3-gang flush-mounting box for hollow partition walls</b></div> <div>2343</div> <div>Pack of 35</div>                                                                                                                                                                                                               |   | <div><b>4-gang flush-mounting box for hollow partition walls</b></div> <div>2344</div> <div>Pack of 30</div>                                         |
|                 | <div><b>5-gang flush-mounting box for hollow partition walls</b></div> <div>2345</div> <div>Pack of 21</div>                                                                                                                                                                                                               |  | <div><b>Hole saw with countersink for hollow partition walls</b></div> <div>2158000</div> <div>diam. 68 mm<br/>depth 40mm</div> <div>Pack of 1</div> |
|                | <div><b>Countersink for Ø 68 mm</b></div> <div>5892000</div> <div>Tool for flush installation of hollow wall boxes</div> <div>Pack of 1</div>                                                                                                                                                                              |  | <div><b>Replacement blades for ref. 5892000</b></div> <div>5893000</div> <div>Pack of 1</div>                                                        |
|                 | <div><b>BJC fixing frame aligner</b></div> <div>3201</div> <div>Pack of 1</div>                                                                                                                                                                                                                                            |                                                                                     |                                                                                                                                                      |

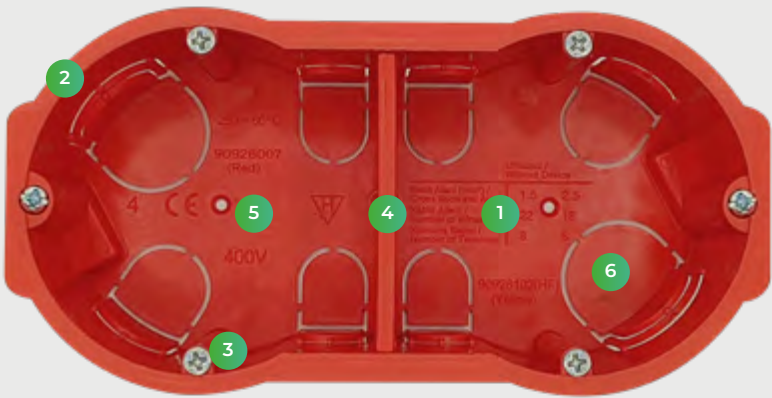

## Mechanism boxes for recessing in cavity walls

- 1

**A robust yet flexible box**  
This box is made of a solid yet flexible material that yields when pressed. This flexibility prevents the box from breaking if a little force is applied, e.g., if you have to press it to fit it into the hole in the partition. Note: this does not mean that the box twists, but that it is flexible.
- 2

**Extra thin outer ring lip (0.5 mm)**  
As above, the lip is sufficiently stiff to prevent the box from sinking into the hole, but at the same time it is very thin. A thin lip allows the mechanisms to fit as tightly as possible to the wall, thereby minimising interference with the mechanisms.
- 3

**The flat-head fixing frame screw: facilitates the adjustment and connection of the electrical mechanisms**  
By using flat-head screws we ensure that they do not interfere with the mechanisms, improving their connection and ensuring they are flush with the wall.
- 4

**Removable dividers with holes for cable routing**  
Removable divider that reinforces the walls of the box, preventing them from yielding to external pressures from the fixing material or surrounding area, and with a hole for cable routing.
- 5

**Holes to mark the drill hole centres to ensure accurate installation**  
Installation requires 68 mm diameter drill bits. These holes make the installer's job easier by indicating the drilling points. They indicate the exact point at which to drill, thus avoiding errors or the need for later retouching.
- 6

**Convenient knock-outs make it easy to install cables without damaging them**  
The knock-outs are available in different diameters (16, 20 and 25 mm) to better accommodate the diameter of the pipe used in the installation.



# BJC

## Cetact



## Cetact



CETACT  
16 A-500 V  
32 A, 63 A y 125 A – 750 V  
Degree of protection IP44 (16 A, 32 A), IP67 (63 A, 125 A)

Cetact plugs, socket outlets and connectors for industrial low-voltage installations are designed in accordance with the UNE-EN 60309-1 and UNE-EN 60309-2 standards.

The Cetact range is available in 2P+E, 3P+E, 3P+N+E and in the following versions: wall-mounted and panel-mounted socket outlets, connectors and plugs.

The manufacturing process allows for immediate delivery of any configuration, including the 6-hour earth pin position and the other positions indicated inside.

### Characteristics of the materials:

The properties of the technical polymers used in the manufacture of the insulating parts of the Cetact system should be noted. They enable the following:

- Appropriate resistance to abnormal heat and fire. This exceeds the self-extension test of incandescent wire at 850 °C (UNE-EN 60695-2-1).
- Excellent dielectric and insulation properties.
- High heat stability.
- High mechanical strength.
- High resistance to chemical and atmospheric agents.
- High resistance to UV radiation.

### Functional features:

The Cetact system offers two key benefits: service reliability and user safety. The reliability and continuity of operation are ensured by the qualities of the materials used and the high mechanical stability of the coupling between socket and plug. Compliance with the specifications of the standard ensures safety, since:

- It is impossible to connect sockets and plugs if all their nominal characteristics do not match: current, voltage, number of contacts and frequency.
- All have a ground contact that connects before and disconnects after the active contacts.
- They have mechanical interlocking. The 63 and 125 A models also have an auxiliary pole for an electrical interlocking (available on request).
- The mobile accessories are equipped with cable clamps to ensure that the conductors are securely fastened.
- The plugs and connectors have a cable gland to hold the cable in place. Thanks to the 'Twist System', both plugs and connectors can be wired, assembled and disassembled without screws. This considerably reduces installation time.

### Product range and applications:

As mentioned above, the combination of different nominal characteristics results in an extensive range of more than 300 different products. The characteristics outlined here, and the extensive product range, make Cetact suitable for general industry, agricultural installations, shipyards, warehouses, construction sites and laboratories, etc.

IP44 Wall-mounted socket outlets



|      | Code    | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|---------|---------------------|-------------------|--------------------|---------------|
| 16 A | CT-9963 | 2P+E                | 200÷250 V         | 6 h                | 10            |
|      | CT-9971 | 3P+E                | 380÷415 V         | 6 h                | 10            |
|      | CT-9981 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 10            |
| 32 A | CT-9964 | 2P+E                | 200÷250 V         | 6 h                | 10            |
|      | CT-9972 | 3P+E                | 380÷415 V         | 6 h                | 10            |
|      | CT-9982 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 10            |

IP67 Wall-mounted socket outlets



|      | Code    | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|---------|---------------------|-------------------|--------------------|---------------|
| 63 A | CT-9946 | 3P+E                | 380÷415 V         | 6 h                | 1             |
|      | CT-9947 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |

IP44 Panel-mounted socket outlet



|      | Code    | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|---------|---------------------|-------------------|--------------------|---------------|
| 16 A | CT-9967 | 2P+E                | 200÷250 V         | 6 h                | 10            |
|      | CT-9975 | 3P+E                | 380÷415 V         | 6 h                | 10            |
|      | CT-9985 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 10            |
| 32 A | CT-9968 | 2P+E                | 200÷250 V         | 6 h                | 10            |
|      | CT-9976 | 3P+E                | 380÷415 V         | 6 h                | 10            |
|      | CT-9986 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 10            |

IP67 Panel-mounted socket outlet



|      | Code     | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|----------|---------------------|-------------------|--------------------|---------------|
| 16 A | CT-71363 | 2P+E                | 200÷250 V         | 6 h                | 2             |
|      | CT-71473 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|      | CT-71483 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |
| 32 A | CT-71367 | 2P+E                | 200÷250 V         | 6 h                | 2             |
|      | CT-71477 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|      | CT-71487 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |

On request, any earth pin position within the UNE-EN 60309-1/60309-2 standard can be supplied

IP67 Panel-mounted socket outlet



The plugs and connectors have a cable gland to hold the cable in place. Thanks to the 'Twist System', both plugs and connectors can be wired, assembled and disassembled without screws. This considerably reduces installation time.

|       | Code    | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|-------|---------|---------------------|-------------------|--------------------|---------------|
| 63 A  | CT-9948 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|       | CT-9949 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |
| 125 A | CT-9954 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|       | CT-9955 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |

IP44 Connectors



|      | Code     | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|----------|---------------------|-------------------|--------------------|---------------|
| 16 A | CT-71213 | 2P+E                | 200÷250 V         | 6 h                | 10            |
|      | CT-71214 | 3P+E                | 380÷415 V         | 6 h                | 10            |
|      | CT-71215 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 10            |
| 32 A | CT-71223 | 2P+E                | 200÷250 V         | 6 h                | 10            |
|      | CT-71224 | 3P+E                | 380÷415 V         | 6 h                | 10            |
|      | CT-71225 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 10            |

IP67 Connectors



|      | Code     | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|----------|---------------------|-------------------|--------------------|---------------|
| 16 A | CT-73303 | 2P+E                | 200÷250 V         | 6 h                | 2             |
|      | CT-73413 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|      | CT-73423 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |
| 32 A | CT-73306 | 2P+E                | 200÷250 V         | 6 h                | 2             |
|      | CT-73416 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|      | CT-73426 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |



|       | Code    | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|-------|---------|---------------------|-------------------|--------------------|---------------|
| 63 A  | CT-9950 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|       | CT-9951 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |
| 125 A | CT-9956 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|       | CT-9957 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |

On request, any earth pin position within the UNE-EN 60309-1/60309-2 standard can be supplied

IP44 plugs



|      | Code     | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|----------|---------------------|-------------------|--------------------|---------------|
| 16 A | CT-71013 | 2P+E                | 200÷250 V         | 6 h                | 10            |
|      | CT-71014 | 3P+E                | 380÷415 V         | 6 h                | 10            |
|      | CT-71015 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 10            |
| 32 A | CT-71023 | 2P+E                | 200÷250 V         | 6 h                | 10            |
|      | CT-71024 | 3P+E                | 380÷415 V         | 6 h                | 10            |
|      | CT-71025 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 10            |

IP67 plugs



|      | Code     | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|----------|---------------------|-------------------|--------------------|---------------|
| 16 A | CT-77303 | 2P+E                | 200÷250 V         | 6 h                | 2             |
|      | CT-77413 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|      | CT-77423 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |
| 32 A | CT-77306 | 2P+E                | 200÷250 V         | 6 h                | 2             |
|      | CT-77416 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|      | CT-77426 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |



|       | Code    | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|-------|---------|---------------------|-------------------|--------------------|---------------|
| 63 A  | CT-9952 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|       | CT-9953 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |
| 125 A | CT-9958 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|       | CT-9959 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |

IP44 angle plugs



|      | Code     | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|----------|---------------------|-------------------|--------------------|---------------|
| 16 A | CT-75302 | 2P+E                | 200÷250 V         | 6 h                | 2             |
|      | CT-75412 | 3P+E                | 380÷415 V         | 6 h                | 2             |
|      | CT-75422 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |

On request, any earth pin position within the UNE-EN 60309-1/60309-2 standard can be supplied

IP44 wall-mounted inlets




|      | Code    | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|---------|---------------------|-------------------|--------------------|---------------|
| 16 A | CT-9945 | 2P+E                | 200÷250 V         | 6 h                | 10            |
|      | CT-9979 | 3P+E                | 380÷415 V         | 6 h                | 10            |
| 32 A | CT-9962 | 2P+E                | 200÷250 V         | 6 h                | 10            |
|      | CT-9980 | 3P+E                | 380÷415 V         | 6 h                | 10            |
|      | CT-9990 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 10            |

IP67 semi-recessed wall-mounted inlets



|      | Code    | Type / no. of poles | Voltage           | Earth pin position | Units per box |
|------|---------|---------------------|-------------------|--------------------|---------------|
| 63 A | CT-9991 | 3P+N+E              | 200/346÷240/415 V | 6 h                | 2             |

COLOUR CODING AND EARTH PIN POSITION  
(Wiring diagram in accordance with UNE-EN 60309-2)

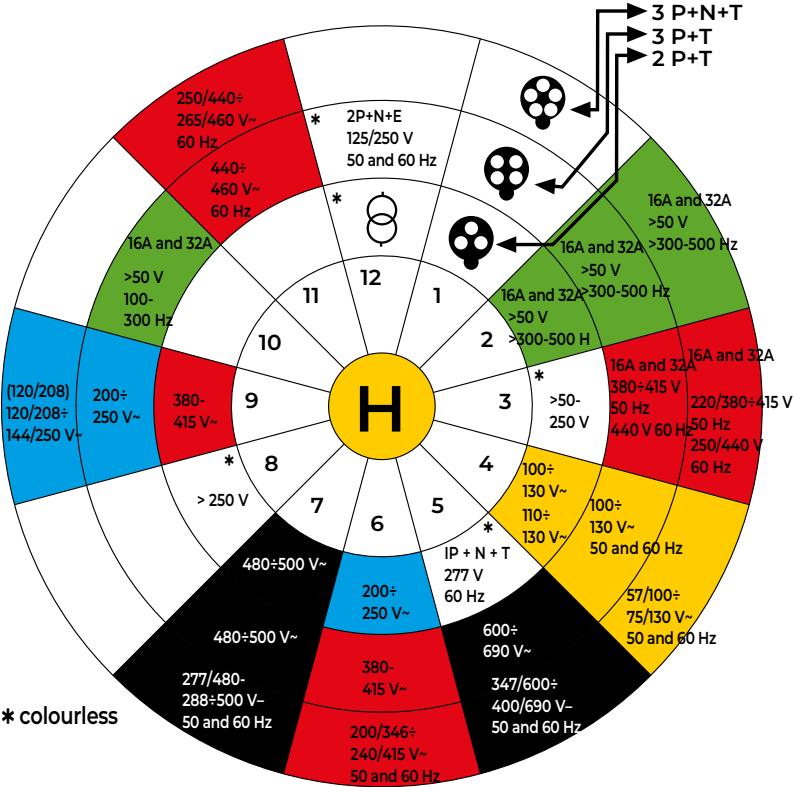

All sockets are manufactured in different colours to make it easy to distinguish between different voltages and frequencies.

On request, any earth pin position complaint with the UNE-EN 60309-1/60309-2 standard can be supplied.



| Type / no. of poles | FREQUENCY<br>HZ                                                           | VOLTAGE                        |                                | DEVICE TT<br>SHORT-CIRCUIT POSITION |              | COLOUR                                                                                     | WALL-MOUNTED SOCKET OUTLETS                                                             |              |              | PANEL-MOUNTED SOCKET OUTLETS |            |           |          |
|---------------------|---------------------------------------------------------------------------|--------------------------------|--------------------------------|-------------------------------------|--------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|--------------|--------------|------------------------------|------------|-----------|----------|
|                     |                                                                           | CEE 17*                        | UNE-EN 60309-2                 | 16 AND 32 A                         | 63 AND 125 A |                                                                                            | 16 A<br>IP44                                                                            | 32 A<br>IP44 | 63 A<br>IP67 | 16 A                         |            | 32 A      |          |
| 2P+E                | 50 and 60                                                                 | 110÷130                        | 100÷130                        | 4                                   | 4            |  YELLOW   | CT-9963-4                                                                               | CT-9964-4    |              | CT-9967-4                    | CT-71363-4 |           |          |
|                     |                                                                           | 220÷240                        | 220÷250                        | 6                                   | 6            |  BLUE     | CT-9963                                                                                 | CT-9964      |              | CT-9967                      | CT-71363   | CT-9968   | CT-71367 |
|                     | 60                                                                        | -                              | 277                            | 5                                   | 5            |  (3)      |                                                                                         |              |              |                              |            |           |          |
|                     |                                                                           | 380÷415                        | 380÷415                        | 9                                   | 9            |  RED      | CT-9963-9                                                                               | CT-9964-9    |              | CT-9967-9                    |            |           |          |
|                     |                                                                           | -                              | 480÷500                        | 7                                   | 7            |  BLACK    |                                                                                         |              |              |                              |            |           |          |
|                     | 50 and 60                                                                 | Circuit separation transformer | Circuit separation transformer | 12                                  | 12           |  (3)      |                                                                                         |              |              |                              |            |           |          |
|                     |                                                                           | >300÷500 incl.                 | >50                            | >50                                 | 2            | -                                                                                          |  GREEN |              |              |                              |            |           |          |
|                     | Direct current                                                            | 50÷250                         | 50÷250 incl.                   | 3                                   | 3            |  (3)      |                                                                                         |              |              | CT-9967-3                    |            | CT-9968-3 |          |
|                     |                                                                           | >250                           | >250                           | 8                                   | 8            |  (3)      |                                                                                         |              |              |                              |            |           |          |
| 3P+E                | 50 and 60                                                                 | 110÷130                        | 110÷130                        | 4                                   | 4            |  YELLOW  | CT-9971-4                                                                               | CT-9972-4    | CT-9946-4    |                              |            |           |          |
|                     |                                                                           | 220÷240                        | 200÷250                        | 9                                   | 9            |  BLUE   | CT-9971-9                                                                               | CT-9972-9    | CT-9946-9    |                              |            |           |          |
|                     |                                                                           | 380÷415                        | 380÷415                        | 6                                   | 6            |  RED    |                                                                                         |              | CT-9946      |                              | CT-71473   |           | CT-71477 |
|                     | 60                                                                        | 440                            | 440÷460 (1)                    | 11                                  | 11           |  RED    |                                                                                         |              |              |                              |            |           |          |
|                     |                                                                           | 500                            | 480÷500                        | 7                                   | 7            |  BLACK  | CT-9971-7                                                                               | CT-9972-7    | CT-9946-7    |                              |            |           |          |
|                     |                                                                           | 750                            | 600÷690                        | 5                                   | 5            |  BLACK  |                                                                                         |              |              |                              |            |           |          |
|                     | 50 and 60                                                                 | 125/250 single-phase           | 125/250 single-phase           | 12                                  | 12           |  (3)    |                                                                                         |              |              |                              |            |           |          |
|                     |                                                                           | 50<br>60                       | 380<br>440 (2)                 | 3                                   | -            |  RED    |                                                                                         |              |              |                              |            |           |          |
|                     | 100÷300 incl.                                                             | >50                            | >50                            | 10                                  | -            |  GREEN  |                                                                                         |              |              |                              |            |           |          |
|                     | >300÷500 incl.                                                            | >50                            | >50                            | 2                                   | -            |  GREEN  |                                                                                         |              |              |                              |            |           |          |
| 3P+N+E              | 50 and 60                                                                 | 110÷130                        | 57/100÷75/130                  | 4                                   | 4            |  YELLOW | CT-9981-4                                                                               | CT-9982-4    |              |                              |            |           |          |
|                     |                                                                           | 127/220÷138/240                | 120/208÷144/250                | 9                                   | 9            |  BLUE   | CT-9981-9                                                                               | CT-9982-9    |              |                              |            |           |          |
|                     |                                                                           | 220/380÷240/415                | 200/346÷240/415                | 6                                   | 6            |  RED    | CT-9981                                                                                 | CT-9982      |              |                              |            |           |          |
|                     |                                                                           | 500                            | 277/480÷288/500                | 7                                   | 7            |  BLACK  | CT-9981-7                                                                               | CT-9982-7    |              |                              |            |           |          |
|                     |                                                                           | 750                            | 347/600÷400/690                | 5                                   | 5            |  BLACK  |                                                                                         |              |              |                              |            |           |          |
|                     | 60                                                                        | 250/440                        | 250/440÷265/460 (1)            | 11                                  | 11           |  RED    |                                                                                         | CT-9982-11   |              |                              |            |           |          |
|                     | 50<br>60                                                                  | -                              | 220/380<br>250/440 (1)         | 3                                   | -            |  RED    |                                                                                         |              |              |                              |            |           |          |
|                     | >300÷500 incl.                                                            | >50                            | >50                            | 2                                   | -            |  GREEN  |                                                                                         | CT-9982-2    |              |                              |            |           |          |
| All types           | All rated voltages and/or frequencies not covered by other configurations |                                |                                | 1                                   | 1            |                                                                                            |                                                                                         |              |              |                              |            |           |          |

| PANEL-MOUNTED<br>SOCKET OUTLETS |               | CONNECTORS  |            |             |            |              |               | PLUGS       |            |             |            |              |               | ANGLE<br>PLUGS | WALL-MOUNTED<br>INLETS |              |
|---------------------------------|---------------|-------------|------------|-------------|------------|--------------|---------------|-------------|------------|-------------|------------|--------------|---------------|----------------|------------------------|--------------|
| 63 A<br>IP67                    | 125 A<br>IP67 | 16 A        |            | 32 A        |            | 63 A<br>IP67 | 125 A<br>IP67 | 16 A        |            | 32 A        |            | 63 A<br>IP67 | 125 A<br>IP67 | 16 A<br>IP44   | 16 A<br>IP44           | 32 A<br>IP44 |
|                                 |               |             | CT-73303-4 |             |            |              |               | CT-71013-4  | CT-77303-4 | CT-71023-4  |            |              |               |                |                        |              |
|                                 |               | CT-71213    | CT-73303   | CT-71223    | CT-73306   |              |               | CT-71013    | CT-77303   | CT-71023    | CT-77306   |              |               | CT-75302       |                        | CT-9962      |
|                                 |               | CT-71213-5  |            | CT-71223-5  |            |              |               | CT-71013-5  |            | CT-71023-5  |            |              |               |                |                        |              |
|                                 |               |             |            |             |            |              |               |             |            |             |            |              |               |                |                        |              |
|                                 |               | CT-71213-7  |            |             |            |              |               | CT-71013-7  |            |             |            |              |               |                |                        |              |
|                                 |               | CT-71213-12 |            |             |            |              |               | CT-71013-12 |            | CT-71023-12 |            |              |               |                |                        |              |
|                                 |               |             |            |             |            |              |               | CT-71013-2  |            |             |            |              |               |                |                        |              |
|                                 |               | CT-71213-3  |            | CT-71223-3  |            |              |               | CT-71013-3  |            | CT-71023-3  |            |              |               |                |                        |              |
|                                 |               |             |            |             |            |              |               |             |            |             |            |              |               |                |                        |              |
| CT-9948-4                       | CT-9954-4     |             |            |             |            | CT-9950-4    | CT-9956-4     |             |            |             |            | CT-9952-4    | CT-9958-4     |                | CT-9979-4              | CT-9980-4    |
| CT-9948-9                       | CT-9954-9     |             |            |             |            | CT-9950-9    | CT-9956-9     | CT-71014-9  | CT-77413-9 |             |            | CT-9952-9    | CT-9958       |                | CT-9979-9              | CT-9980-9    |
| CT-9948                         | CT-9954       | CT-71214    | CT-73413   | CT-71224    | CT-73416   | CT-9950      | CT-9956       | CT-71014    | CT-77413   | CT-71024    | CT-77416   | CT-9952      | CT-9958       | CT-75412       | CT-9979                | CT-9980      |
|                                 |               |             |            |             |            |              |               | CT-71014-11 |            | CT-71024-11 |            |              | CT-9958-11    |                |                        |              |
| CT-9948-7                       | CT-9954-7     |             |            |             |            | CT-9950-7    | CT-9956-7     |             |            | CT-71024-7  |            | CT-9952-7    | CT-9958-7     |                | CT-9979-7              | CT-9980-7    |
| CT-9948-5                       |               | CT-71214-5  |            | CT-71224-5  |            |              | CT-9956-5     | CT-71014-5  |            | CT-71024-5  |            | CT-9952-5    |               |                |                        |              |
|                                 |               |             |            |             |            |              |               | CT-71014-12 |            |             |            | CT-9952-12   |               |                |                        |              |
|                                 |               | CT-71214-3  |            | CT-71224-3  |            |              |               | CT-71014-3  |            | CT-71024-3  |            |              |               |                |                        |              |
|                                 |               | CT-71214-10 |            | CT-71224-10 |            |              |               | CT-71014-10 |            | CT-71024-10 |            |              |               |                |                        | CT-9980-10   |
|                                 |               | CT-71214-2  |            | CT-71224-2  |            |              |               | CT-71014-2  |            | CT-71024-2  |            |              |               |                | CT-9979-2              |              |
| CT-9949-4                       | CT-9955-4     |             |            |             |            | CT-9951-4    | CT-9957-4     |             |            |             |            | CT-9953-4    | CT-9959-4     |                |                        |              |
| CT-9949-9                       | CT-9955-9     |             |            |             | CT-73426-9 | CT-9951-9    | CT-9957-9     |             |            |             | CT-77426-9 | CT-9953-9    | CT-9959-9     |                |                        |              |
| CT-9949                         | CT-9955       | CT-71215    | CT-73423   | CT-71225    | CT-73426   | CT-9951      | CT-9957       | CT-71015    | CT-77423   | CT-71025    | CT-77426   | CT-9953      | CT-9959       | CT-75422       |                        |              |
| CT-9949-7                       | CT-9955-7     |             |            |             | CT-73426-7 | CT-9951-7    | CT-9957-7     |             |            |             | CT-77426-7 | CT-9953-7    | CT-9959-7     |                |                        |              |
| CT-9949-5                       |               | CT-71215-5  |            | CT-71225-5  |            |              | CT-9957-5     | CT-71015-5  |            | CT-71025-5  |            |              | CT-9959-5     |                |                        |              |
|                                 |               |             |            |             |            |              |               |             |            |             |            |              |               |                |                        |              |
|                                 |               | CT-71215-3  |            | CT-71225-3  |            |              |               | CT-71015-3  |            | CT-71025-3  |            |              |               |                |                        |              |
|                                 |               |             |            |             |            |              |               |             |            | CT-71025-2  |            |              |               |                |                        |              |

(1) Mainly for use on board ships.  
(2) Only for refrigerated containers (ISO standard).  
(3) Supplied without colour marking.

\* Equivalence with former publication 17 of the International Commission on Certification of Conformity of Electrical Equipment.

Extra-low voltage panel-mounted socket outlets



|                                             | Code         | Type / no. of poles | Voltage | Earth pin position | Units per box |
|---------------------------------------------|--------------|---------------------|---------|--------------------|---------------|
| Straight - protected<br>IP44<br><b>16 A</b> | <b>I-362</b> | 2P                  | 20÷25 V | —                  | 1             |



|                                              | Code          | Type / no. of poles | Voltage | Earth pin position | Units per box |
|----------------------------------------------|---------------|---------------------|---------|--------------------|---------------|
| Straight - watertight<br>IP67<br><b>16 A</b> | <b>I-3622</b> | 2P                  | 20÷25 V | —                  | 1             |

On request, any earth pin position within the UNE-EN 60309-1/60309-2 standard can be supplied

|         |         |         |
|---------|---------|---------|
| 20÷25 V | 40÷50 V | > 60 Hz |
|---------|---------|---------|

Extra-low voltage plugs



|                                  | Code         | Type / no. of poles | Voltage | Earth pin position | Units per box |
|----------------------------------|--------------|---------------------|---------|--------------------|---------------|
| Protected<br>IP44<br><b>16 A</b> | <b>I-062</b> | 2P                  | 20÷25 V | —                  | 1             |



|                                   | Code          | Type / no. of poles | Voltage | Earth pin position | Units per box |
|-----------------------------------|---------------|---------------------|---------|--------------------|---------------|
| Watertight<br>IP67<br><b>16 A</b> | <b>I-0622</b> | 2P                  | 20÷25 V | —                  | 1             |

Extra-low voltage connectors



|                                  | Code         | Type / no. of poles | Voltage | Earth pin position | Units per box |
|----------------------------------|--------------|---------------------|---------|--------------------|---------------|
| Protected<br>IP44<br><b>16 A</b> | <b>I-262</b> | 2P                  | 20÷25 V | —                  | 1             |

On request, any earth pin position within the UNE-EN 60309-1/60309-2 standard can be supplied

|         |         |         |
|---------|---------|---------|
| 20÷25 V | 40÷50 V | > 60 Hz |
|---------|---------|---------|

Adapters



**I-2302**  
IP44 adapter  
Cetact plug input  
Domestic socket outlet  
16 A Schuko® 6 h  
16 A Schuko® (lateral earthing)

Pack of 5



**I-2303**  
IP20 adapter  
Domestic plug input  
Cetact output 16 A Schuko® 6 h  
16 A Schuko® (lateral earthing)

Pack of 5

**BJC**

# Watertight mounting boxes, connection boxes and accessories



## Watertight mounting boxes, connection boxes and accessories



### MARINER SERIES

The Mariner series offers a range of boxes and sets with mechanisms designed for areas subject to adverse weather conditions, corrosive environments, and industrial installations requiring a high degree of protection.

#### Characteristics:

Degree of protection: IP54 S/UNE 20234.

Degree of protection against mechanical damage: IK08 UNE-EN 50102.

Boxes, cases and opaque covers are made of grey ABS (RAL 7035).

Transparent polycarbonate assembly covers and boxes.

Neoprene gaskets on all models.

### ALUMINIUM SERIES

Boxes made in die-cast aluminium.

Conveniently protected by paint.

For installations in open or humid environments, particularly where high mechanical resistance is required.



Mariner mounting boxes

Aluminium Series

Die-cast aluminium mounting boxes, suitably protected by paint. Ideal for outdoor facilities or humid environments, particularly where high mechanical resistance is required. Degree of protection IP54 (UNE 20324), IK08 (UNE-EN 50102)



**Square blank mounting boxes**  
**4022** Int. dimensions. 90x90x42 mm  
**4032** Int. dimensions. 110x110x45 mm  
**4042** Int. dimensions. 130x130x50 mm  
**4052** Int. dimensions. 150x150x65 mm  
**4053** With a tall cover. Int. dimensions. 150x150x100 mm

Pack of 1



**Square mounting boxes with openings on all 4 sides**  
**4020** Int. dimensions. 90x90x42 mm  
**4030** Int. dimensions. 110x110x45 mm  
**4040** Int. dimensions. 130x130x50 mm  
**4050** Int. dimensions. 150x150x65 mm

Pack of 1



**Rectangular mounting boxes Fixed cover • Blank**  
**4063** Int. dimensions. 160x200x110 mm  
**4064** Int. dimensions. 200x250x120 mm

Pack of 1



**Rectangular mounting boxes Articulated cover • Blank**  
**4065** Int. dimensions. 160x200x110 mm  
**4066** Int. dimensions. 200x250x120 mm

Pack of 1

Cable glands and accessories



**Cable glands for normal inputs**  
Made of unalterable and unbreakable plastic material.

|                               | Thread | Ø Cable |      |
|-------------------------------|--------|---------|------|
|                               |        | Max.    | Min. |
| <b>6290-M16</b>               | M16    | 9       | 5    |
| <b>6290-M20</b>               | M20    | 12      | 9    |
| <b>6290-M25</b>               | M25    | 18      | 14   |
| <b>6290-M32</b><br>Pack of 25 | M32    | 21      | 17   |
| <b>6290-M40</b>               | M40    | 28      | 21   |
| <b>6290-M50</b><br>Pack of 10 | M50    | 35      | 28   |

Interchangeable caps

Blank or with threaded entries

**Threaded caps**  
To ask for a cap with a specific thread, add it at the end of the code  
e.g.: **M25: 4060-M25 o M50: 4101-M50.**

| Aluminium                                    |               |
|----------------------------------------------|---------------|
| Threaded                                     | Blank         |
| For 90 x 90 mm mounting boxes                |               |
| <b>4060</b>                                  | <b>4060-C</b> |
| Inputs: M16, M20, M25                        |               |
| For 110x110 mm and 130x130 mm mounting boxes |               |
| <b>4061</b>                                  | <b>4061-C</b> |
| Inputs: M16, M20, M25, M32                   |               |
| For 150 x 150mm mounting boxes               |               |
| <b>4062</b>                                  | <b>4062-C</b> |
| Inputs: M16, M20, M25, M32, M40, M50         |               |
| Pack of 50                                   |               |

Mariner series mounting boxes



Square opaque cover

Square mounting boxes  
Inside measurement: 90x90x45 mm  
**I-6201** Blank, opaque cover

Inside measurement: 110x110x50 mm  
**I-6202** Blank, opaque cover

Inside measurement: 130x130x60 mm  
**I-6203** Blank, opaque cover

Inside measurement: 150x150x70 mm  
**I-6204** Blank, opaque cover



Rectangular opaque cover

Rectangular mounting boxes  
Inside measurement: 170x230x85 mm  
**I-6205** Blank, opaque cover

Inside measurement: 170x230x120 mm with tall cover  
**I-6207** Blank, opaque tall cover

# BJC

## Assembled and connection boxes



## Assembled and connection boxes



### EMPTY TCP BOXES

The TCP boxes are specially designed to make assemblies with socket outlets and their corresponding protective components. The most important features can be summarised as:

**Versatility.** With only 4 types of boxes, any required combination can be made by installing socket outlets ranging from 16 to 125 A, along with the appropriate electrical protection.

**Safety.** Thanks to the high quality of the materials used, the product offers IP55 protection in accordance with UNE 20324 and Class-II insulation in accordance with UNE-EN 611440. As a result, it can be placed in highly aggressive environments.

**Fast assembly.** The interior elements are easily accessible and can be reworked quickly using the corresponding templates, allowing any type of assembly to be carried out efficiently.

These characteristics make these boxes indispensable for building work, industries with interchangeable manufacturing processes, autonomous portable installations and the maintenance of public and auxiliary services, etc.



### MARINER AND TCP BOXES

Highly recommended for building work, industries with interchangeable manufacturing processes, autonomous portable installations and the maintenance of public and auxiliary services, etc.

#### Mariner specifications:

Bodies comprise ABS boxes and covers in a grey colour (RAL 7035). Neoprene gaskets on all models.

#### TCP specifications:

- The box, front panel and cover are made of polycarbonate.
- The box and panel are RAL 7035 grey.
- The cover is transparent and smoke-coloured.
- It accommodates 17.5 mm modular elements compliant with DIN 43880.

The T-13, T-15 and T-17 boxes also offer unique advantages:

- Models with greater capacity.
- Practical opening and closing system with a handy transparent cover and the option to change the opening method (left and right, or left to right).
- Option for a safety lock using the T-10 accessory.
- The front panel is secured with easily accessible large insulating screws.
- The front panel has a larger window and a cover with easily removable mechanisms, which allow the necessary modules to be used while keeping the unit closed at all times.
- Sealable box.
- The height of the track profile can be adjusted using staggered ABS spacers.
- Easy module terminal access on the rail.

Mounting boxes

BJC

Mariner assembled and connection boxes

ABS Colour Grey RAL 7035 Degree of IP44 protection (UNE 20324), IK08 (UNE-EN 50102) in a vertical position



**I-6202-1**  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
Given terminals of 16 mm²  
  
Pack of 1



**I-6203-1**  
Socket outlets: 4 Schuko® socket outlets (lateral) 16A 250V  
Given terminals of 16 mm²  
Max. current 40 A  
  
Pack of 1




**I-6204-1**  
Socket outlets:  
- 2 Schuko® socket outlets (lateral) 16A 250V  
- 1 Cetact panel-mounted socket outlet 3P+E, 16A, 6h, 380-415V  
Given terminals of 16 mm²  
  
Pack of 1




**I-6204-2**  
Socket outlets:  
- 2 Schuko® socket outlets (lateral) 16A 250V  
- 1 Cetact panel-mounted socket outlet 3P+E, 32A, 6h, 380-415V  
Given terminals of 16 mm²  
  
Pack of 1



**I-6205-1**  
Socket outlets:  
- 3 Schuko® socket outlets (lateral) 16A 250V  
- 1 Cetact panel-mounted socket outlet 3P+E, 16A, 6h, 380-415V  
- 1 Cetact panel-mounted socket outlet 3P+E, 32A, 6h, 380-415V  
Given terminals of 25 mm²  
  
Pack of 1

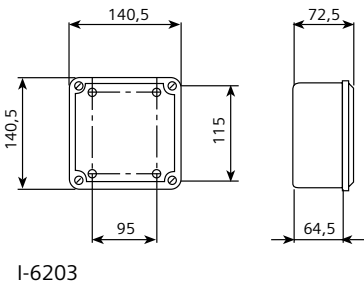

I-6203

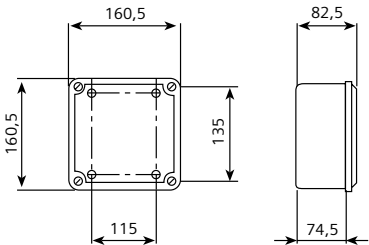

I-6204

TCP mounting boxes

Polycarbonate Colour Grey RAL 7035 Degree of IP44 protection (UNE 20324), IK08 (UNE-EN 50102) in a vertical position



**T-13-1**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
1 Cetact panel-mounted socket outlet 3P+E, 16A, 6h, 380-415V  
  
Pack of 1



**T-13-2**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
1 Cetact panel-mounted socket outlet 3P+E, 32A, 6h, 380-415V  
  
Pack of 1



**T-13-3**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
  
Pack of 1



**T-13-4**  
Box for 8 x 17,5 mm modules  
Socket outlets: 4 Schuko® socket outlets (lateral) 16A 250V  
  
Pack of 1



**T-13-5**  
Box for 8 x 17,5 mm modules  
Socket outlet: 1 Cetact socket outlet 3P +N+E 63 A 6 h 200/346÷240/415 V  
  
Pack of 1




**T-13-6**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
1 socket outlet 2P 16 A 20-25 V~ (extra low voltage)  
  
Pack of 1




**T-13-7**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
1 Cetact panel-mounted socket outlet 3P+N+E, 16A, 6h, 380-415V  
  
Pack of 1



**T-13-8**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
1 Cetact panel-mounted socket outlet 3P+N+E, 32A, 6h, 380-415V  
  
Pack of 1

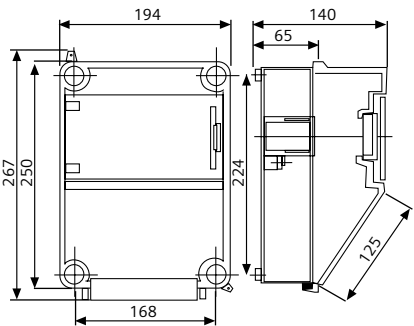

T-13

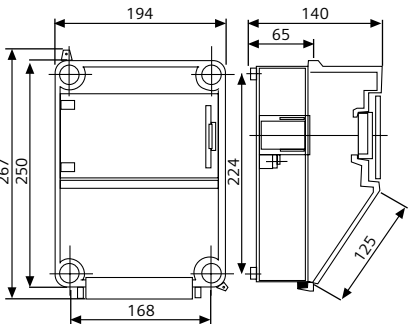



Mounting boxes

BJC

TCP mounting boxes



**T-15-1**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
1 Cetact panel-mounted socket outlet 3P+E, 16A, 6h, 380-415V  
1 Cetact panel-mounted socket outlet 3P+E, 32A, 6h, 380-415V

Pack of 1



**T-15-2**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
2 Cetact panel-mounted socket outlets 3P+E, 16A, 6h, 380-415V

Pack of 1



**T-15-3**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
2 Cetact panel-mounted socket outlets 3P+E, 32A, 6h, 380-415V

Pack of 1



**T-15-4**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
1 Cetact panel-mounted socket outlet 3P+N+E, 16A, 6h, 380-415V  
1 Cetact panel-mounted socket outlet 3P+N+E, 32A, 6h, 380-415V

Pack of 1




**T-15-5**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
2 Cetact panel-mounted socket outlets 3P+N+E, 16A, 6h, 380-415V

Pack of 1




**T-15-6**  
Box for 8 x 17,5 mm modules  
Socket outlets: 2 Schuko® socket outlets (lateral) 16A 250V  
2 Cetact panel-mounted socket outlets 3P+N+E, 32A, 6h, 380-415V

Pack of 1

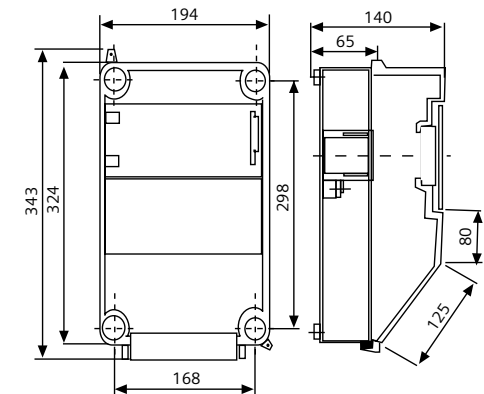

T-15

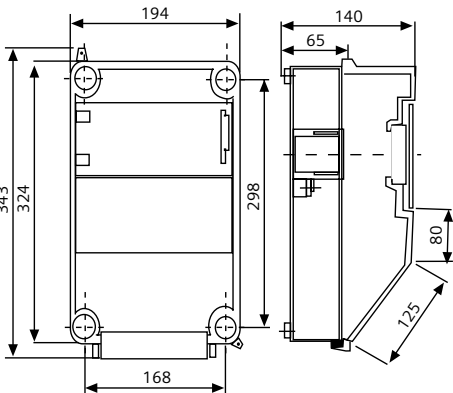

T-15

Any combination can be produced on request

TCP mounting boxes



**T-17-1**  
Box for 12 x 17,5 mm modules  
Socket outlets: 4 Schuko® socket outlets (lateral) 16A 250V  
2 Cetact panel-mounted socket outlets 3P+E, 16A, 6h, 380-415V  
1 Cetact panel-mounted socket outlet 3P+E, 32A, 6h, 380-415V

Pack of 1




**T-17-2**  
Box for 12 x 17,5 mm modules  
Socket outlets: 3 Cetact panel-mounted socket outlets 3P+E, 16A, 6h, 380-415V  
2 Cetact panel-mounted socket outlets 3P+E, 32A, 6h, 380-415V

Pack of 1



**T-17-3**  
Box for 12 x 17,5 mm modules  
Socket outlets: 4 Schuko® socket outlets (lateral) 16A 250V  
1 socket outlet 3P +E 16 A 6 h with locking switch  
1 socket outlet 3P +E 32 A 6 h with locking switch

Pack of 1

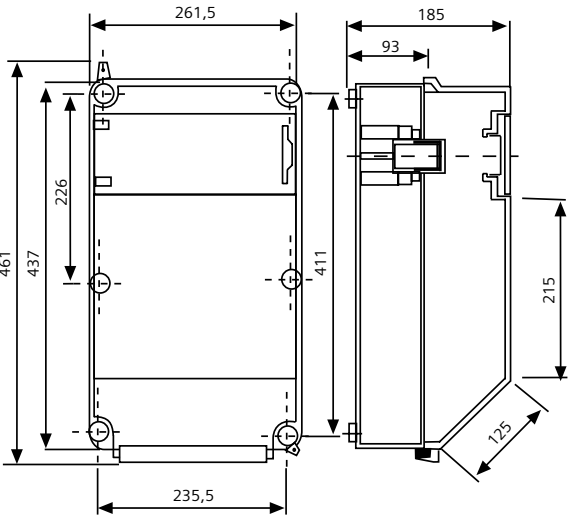

T-17





Any combination can be produced on request

Mounting boxes


BJC

Empty TCP boxes

Polycarbonate · Colour Grey RAL 7035 · Degree of protection IP55 (UNE 20324), IK08 (UNE-EN 50102) in a vertical position
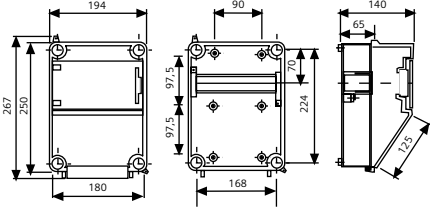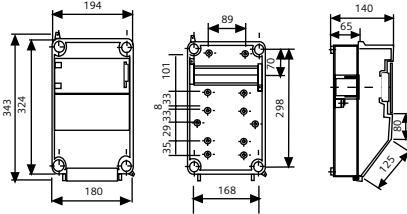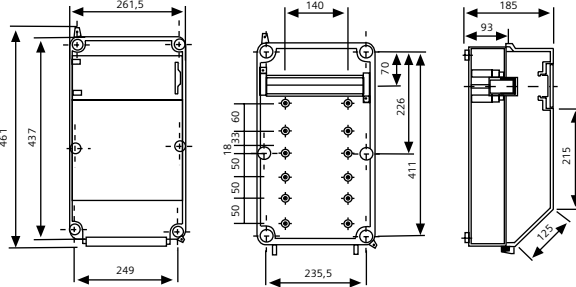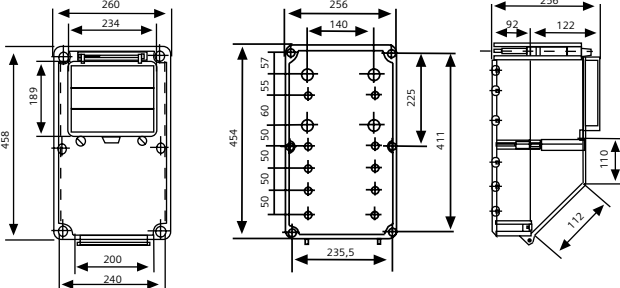
|                                                                                     |                                                                                                                |                                                                                      |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|    | <div><div>T-13</div><div>TCP box with capacity for 8 x 17.5 mm modules</div><div>Pack of 1</div></div>         |    |
|    | <div><div>T-15</div><div>TCP box with capacity for 8 x 17.5 mm modules</div><div>Pack of 1</div></div>         |    |
|   | <div><div>T-17</div><div>TCP box with capacity for 12 x 17.5 mm modules</div><div>Pack of 1</div></div>        |   |
|  | <div><div>T-16 (IP54)</div><div>TCP box with capacity for 24 x 17.5 mm modules</div><div>Pack of 1</div></div> |  |

TCP accessory boxes

|                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                           |                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                | <div><div>I-2316</div><div>Schuko® socket outlet (lateral) 16 A 250 V with safety assembly behind frame IP54</div><div>Pack of 20</div></div>                                                             |  |
|                                                                                                                                                                                                                                                                                                | <div><div>T-904 (M4)<br/>T-905 (M5)</div><div>Screws with an insulation head to secure the box outlets while avoiding any possible indirect contact (supplied with nuts)</div><div>Pack of 50</div></div> |                                                                                     |
| <div><div>Spare parts for boxes T-13, T-15 and T-17</div><div>RE-0226 Transparent door for T-13 and T-15. Pack of 1</div><div>RE-0227 Transparent door for T17. Pack of 1</div><div>RE-0228 Upper cover-box attachment screws T-13, T-15 and T-17. Pack of 1 (2 screws)</div><div>RE-0229 Lower cover-box attachment screws T-13, T-15 and T-17. Pack of 1 (2 screws)</div></div> |                                                                                                                                                                                                           |                                                                                     |

**BJC**

# Technical information

---



Iris, Iris Plus & Mega dimensions

Iris frame dimensions

|                                                                                   |             |
|-----------------------------------------------------------------------------------|-------------|
|  | 85 x 84 mm  |
|  | 85 x 155 mm |
|  | 85 x 226 mm |
|  | 85 x 296 mm |
|  | 156 x 84 mm |
|  | 228 x 84 mm |
|  | 299 x 84 mm |

Material: Thermosetting (UREA)

Iris Plus frame dimensions

|                                                                                   |             |
|-----------------------------------------------------------------------------------|-------------|
|  | 93 x 82 mm  |
|  | 164 x 82 mm |
|  | 236 x 82 mm |
|  | 307 x 82 mm |
|  | 153 x 93 mm |
|  | 225 x 93 mm |

Material: Thermosetting (UREA)

Mega frame dimensions

|                                                                                     |               |
|-------------------------------------------------------------------------------------|---------------|
|  | 90 x 90 mm    |
|  | 161 x 90 mm   |
|  | 232.5 x 90 mm |
|  | 304 x 90 mm   |
|  | 90 x 161 mm   |
|  | 90 x 232.5 mm |
|  | 90 x 304 mm   |

Material: Zamak or natural wood

Common switch dimensions

|                                                                                     |            |
|-------------------------------------------------------------------------------------|------------|
|  | 64 x 53 mm |
|-------------------------------------------------------------------------------------|------------|

Material: Thermosetting (UREA)

Style dimensions

Style frame dimensions

|                                                                                     |             |
|-------------------------------------------------------------------------------------|-------------|
|  | 82 x 82 mm  |
|  | 82 x 153 mm |
|  | 82 x 224 mm |
|  | 82 x 295 mm |
|  | 82 x 366 mm |

Switch dimensions

|                                                                                     |            |
|-------------------------------------------------------------------------------------|------------|
|  | 68 x 68 mm |
|-------------------------------------------------------------------------------------|------------|

Miro dimensions

Miro frame dimensions

|                                                                                       |             |
|---------------------------------------------------------------------------------------|-------------|
|  | 90 x 90 mm  |
|  | 90 x 161 mm |
|  | 90 x 232 mm |
|  | 90 x 303 mm |
|  | 90 x 374 mm |

Switch dimensions

|                                                                                       |            |
|---------------------------------------------------------------------------------------|------------|
|  | 55 x 55 mm |
|---------------------------------------------------------------------------------------|------------|

Viva dimensions

Viva frame dimensions


|                                                                                       |             |
|---------------------------------------------------------------------------------------|-------------|
|  | 86 x 86 mm  |
|  | 86 x 157 mm |
|  | 86 x 228 mm |
|  | 86 x 299 mm |

Common switch dimensions

|                                                                                       |            |
|---------------------------------------------------------------------------------------|------------|
|  | 50 x 50 mm |
|---------------------------------------------------------------------------------------|------------|

Material: Thermoplastic (polycarbonate + ASA)

Coral dimensions

| Coral frame dimensions (both vertical and horizontal)                             |             |
|-----------------------------------------------------------------------------------|-------------|
|  | 86 x 86 mm  |
|  | 86 x 157 mm |
|  | 86 x 229 mm |
|  | 86 x 300 mm |
|  | 86 x 157 mm |
|  | 86 x 229 mm |
|  | 86 x 300 mm |

Material: Self-extinguishing and thermo-resistant (Thermoset)

| Common switch dimensions                                                          |            |
|-----------------------------------------------------------------------------------|------------|
|  | 64 x 46 mm |
| Material: Self-extinguishing and thermo-resistant (Thermoset)                     |            |


Sol dimensions

| Sol frame dimensions                                                                |             |
|-------------------------------------------------------------------------------------|-------------|
|  | 85 x 86 mm  |
|  | 85 x 86 mm  |
|  | 85 x 157 mm |
|  | 85 x 228 mm |
|  | 85 x 120 mm |
|  | 85 x 120 mm |
|  | 85 x 120 mm |


Material: Self-extinguishing and thermo-resistant (Thermoset)

| Common switch dimensions                                                            |            |
|-------------------------------------------------------------------------------------|------------|
|  | 46 x 46 mm |
|  | 23 x 46 mm |
| Material: Self-extinguishing and thermo-resistant (Thermoset)                       |            |

Box dimensions

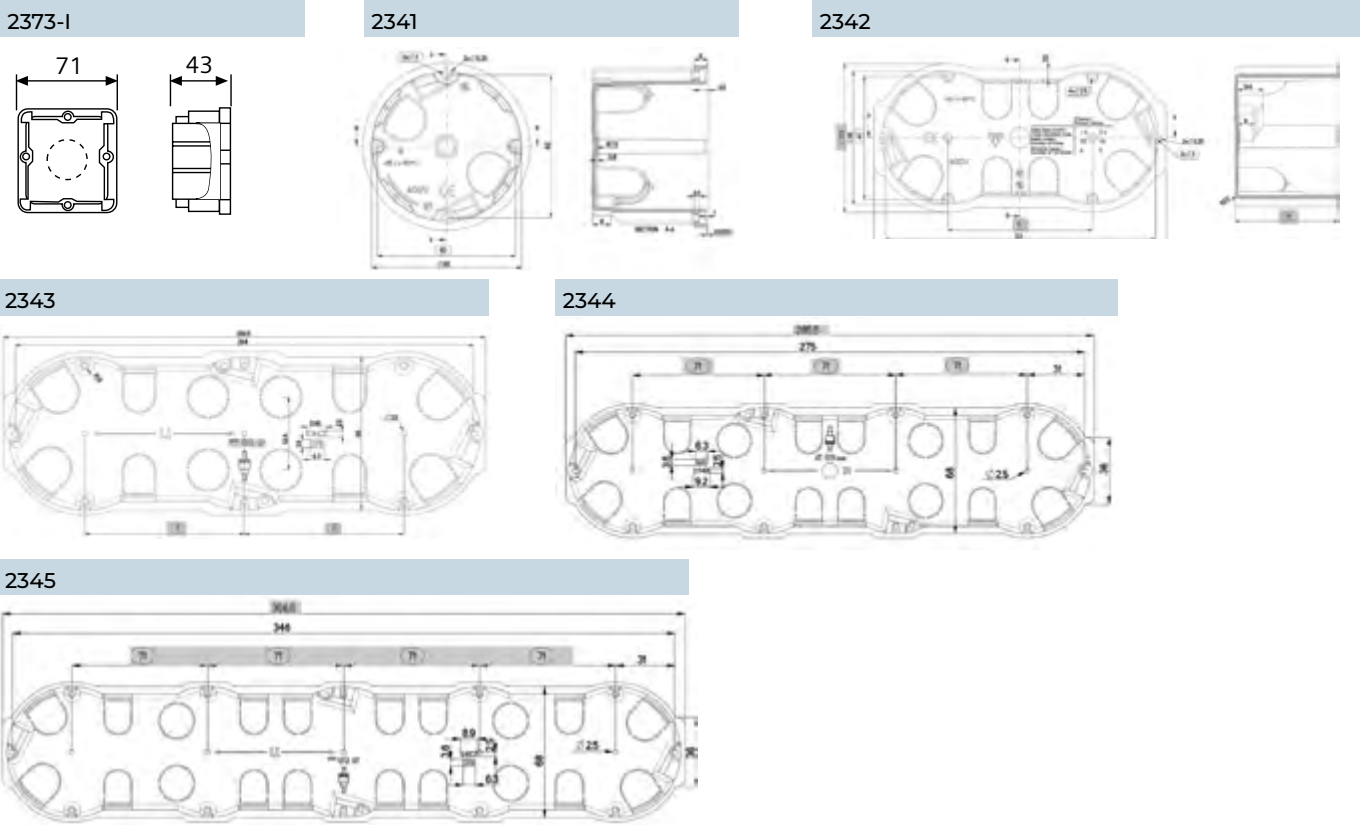

Compensation load for indicator lights

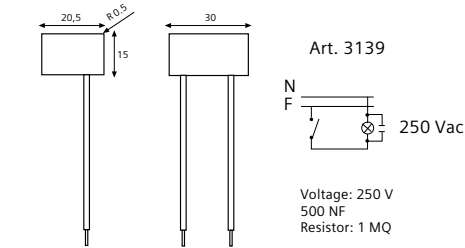

Switch mechanisms

CLASSIFICATION OF MECHANISMS ACCORDING TO FUNCTION NUMBER in accordance with UNE-EN 60669-1 standard


| Function Number | Number of poles | Connections achievable                     |                                                                                       |
|-----------------|-----------------|--------------------------------------------|---------------------------------------------------------------------------------------|
| 1               | 1               | Single pole one-way switch and push-button |  |
| 2               | 2               | 2 pole one-way switch                      |  |
| 5               | 1               | Double one-way switch                      |  |
| 6               | 1               | Two-way switch                             |  |
| 6+6             | 2               | Double two-way switch                      |  |
| 7               | 1               | Two-way switch (intermediate switch)       |  |
| 6+1             | 2               | Two-way switch + Push-button               |  |

To facilitate sales and streamline the work of stockists and installers, BJC sells the BJC Iris, Sol, Coral and Ibiza series separately:

- Sockets or main parts with a reference.
- Switches or covers with a different reference.
- Installation frames, also with a different reference.

The user should bear in mind that all three components are essential for correct and safe installation. Switches and covers must not be used with socket outlets other than those indicated in this catalogue or in the instructions for use. BJC is not responsible for any improper use of the different components.


MEC 18

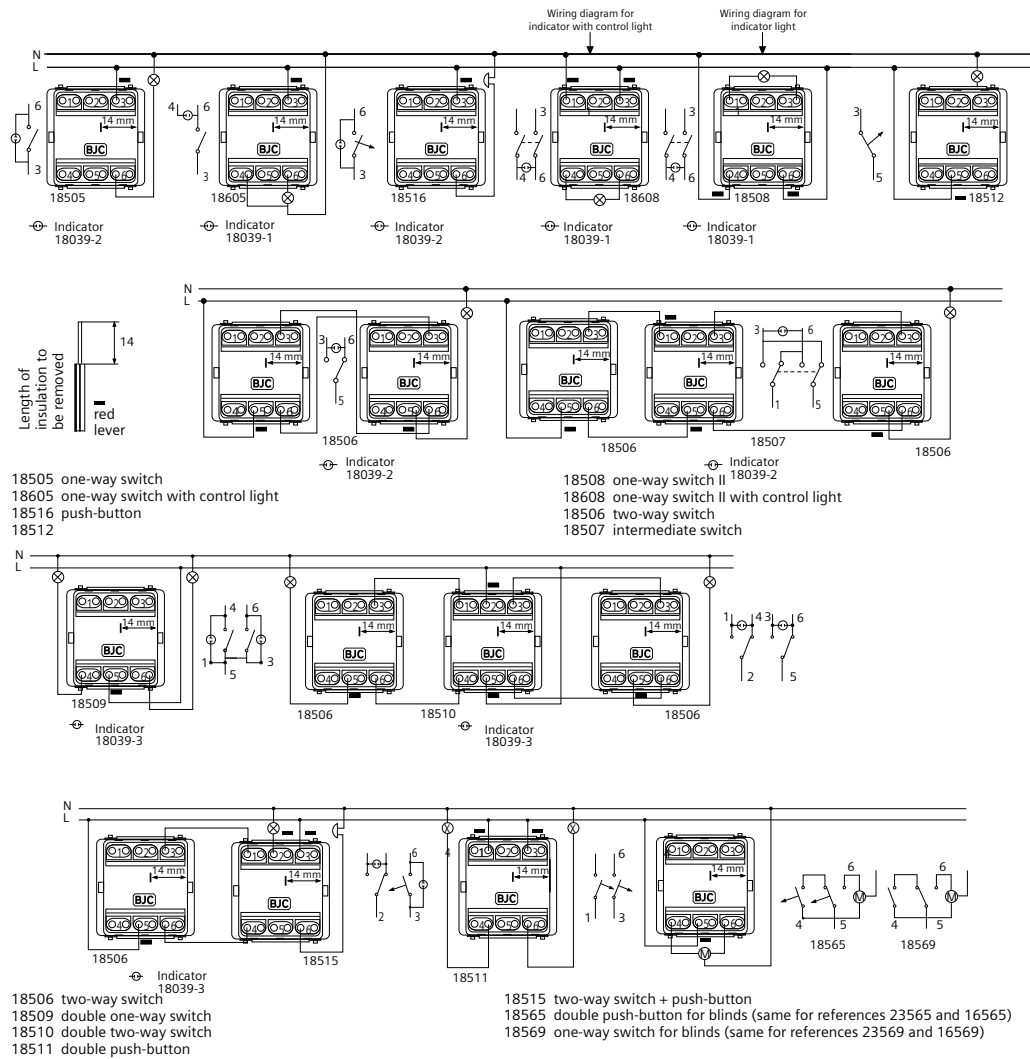

MEC 18 - LED LOAD CHART

| References | Nominal power in watts for SBL loads |
|------------|--------------------------------------|
| 18507-X    | 100W                                 |
| 18507      | 100W                                 |
| 18569-X    | 100W                                 |
| 18569      | 100W                                 |
| 18505-X    | 200W                                 |
| 18505      | 200W                                 |
| 18605-X    | 200W                                 |
| 18605      | 200W                                 |
| 18506-X    | 200W                                 |
| 18506      | 200W                                 |
| 18506-LX   | 200W                                 |
| 18506-L    | 200W                                 |
| 18509-X    | 200W                                 |
| 18509      | 200W                                 |
| 18510-X    | 200W                                 |
| 18510      | 200W                                 |
| 18515-X    | 200W                                 |
| 18515      | 200W                                 |
| 18508-X    | 200W                                 |
| 18508      | 200W                                 |
| 18608-X    | 200W                                 |
| 18608      | 200W                                 |

MEC 16

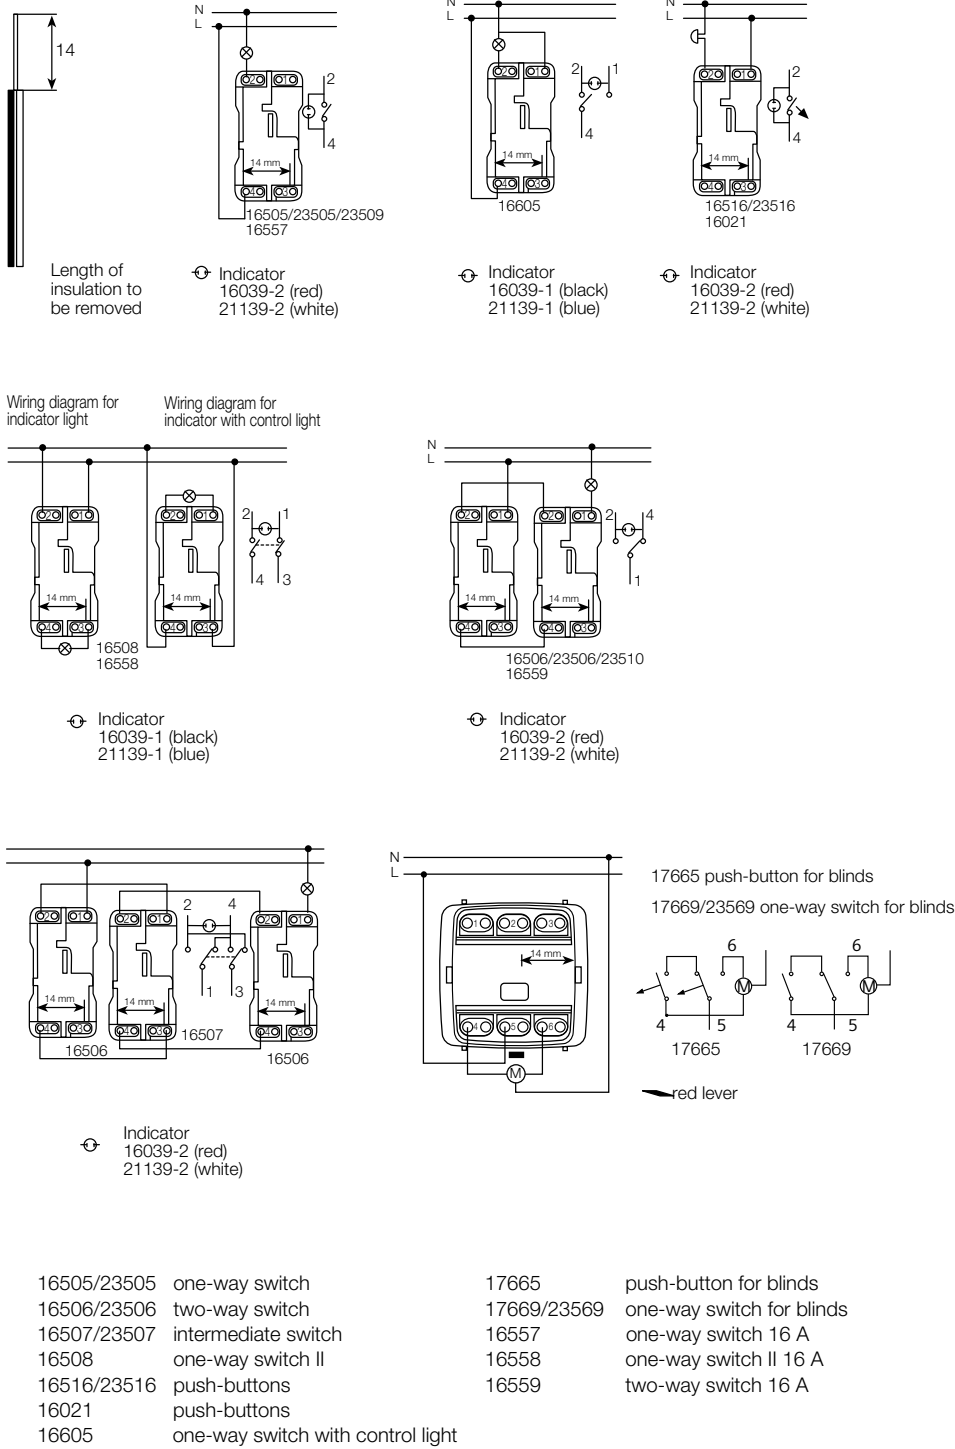

MEC 16 - LED LOAD CHART

| References | Nominal power in watts for SBL loads |
|------------|--------------------------------------|
| 16505      | 100W                                 |
| 16506      | 100W                                 |
| 16507      | 100W                                 |
| 2X16505    | 100W                                 |
| 2X16506    | 100W                                 |
| 17669      | 100W                                 |
| 16508      | 100W                                 |
| 23505-YY   | 100W                                 |
| 23505-YYX  | 100W                                 |
| 23505-YYL  | 100W                                 |
| 23505-YYLX | 100W                                 |
| 23506-YY   | 100W                                 |
| 23506-YYX  | 100W                                 |
| 23506-YYL  | 100W                                 |
| 23506-YYLX | 100W                                 |
| 23507-YY   | 100W                                 |
| 23507-YYX  | 100W                                 |
| 23507-YYL  | 100W                                 |
| 23507-YYLX | 100W                                 |
| 23605-YYL  | 100W                                 |
| 23605-YYLX | 100W                                 |
| 23508-YY   | 100W                                 |
| 23508-YYX  | 100W                                 |
| 23508-YYL  | 100W                                 |
| 23508-YYLX | 100W                                 |
| 23509-YY   | 100W                                 |
| 23509-YYX  | 100W                                 |
| 23509-YYL  | 100W                                 |
| 23509-YYLX | 100W                                 |
| 23510-YY   | 100W                                 |
| 23510-YYX  | 100W                                 |
| 23510-YYL  | 100W                                 |
| 23510-YYLX | 100W                                 |
| 23569-YY   | 100W                                 |
| 23569-YYX  | 100W                                 |

# Technical information


# BJC

## Centralised blinds for installation in connection boxes, operated using conventional push-buttons from any series. Ref. 2393

### Characteristics:


- Used for cable control of window roller blinds, awnings and door controllers (230 V AC electric motors).
- Local and central control inputs.
- Easy installation in a 60 mm connection box.
- Operation in comfort mode - blind height level memory (e.g. half-height).
- Connection for all types of conventional push-buttons (not equipped with indicator pilot lights)
- Rated voltage: 230 V
- Frequency: 50/60 Hz
- Output power: 1250 VA

The blind control (insert) performs the following operations: raising, lowering and stopping blinds equipped with a 230 V AC single-phase motor. Pressing the local control push-button once causes the blind to move in the selected direction; pressing the push-button again stops it. Pressing the central control push-button causes all blinds to move up or down depending on the selected action, regardless of their current position.

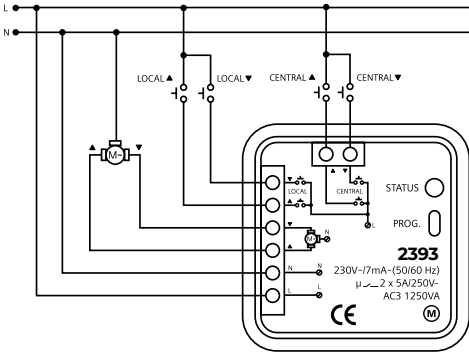

## Schuko® charger with dual USB A and USB C Ref. 18524-USBC

To ensure correct installation, this product should be installed in a mounting box with a minimum internal free diameter of 54 mm (without claws).



### Technical specifications

Schuko® socket

- 230Vac 50Hz, 16A
- Screwless terminal

### Dual USB charger:

- 1 USB type A socket and 1 USB type C socket
- Maximum power: 20W
- Quick charge Power Delivery USB C: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A
- Quick charge USB A: 5 V/3 A; 9 V/2.22 A; 12 V/1.67 A
- Normal charge:
- 5V/3.4A when using USB A and USB C at the same time
- 5V/2.4A when using USB A or USB C individually
- Short circuit protection
- Temperature protection

Compliant with UNE 20315-1-1/1-2 and EN 62368-1 standards

## Signalling

Ref.: 18584

### Technical information:


|                       |                      |
|-----------------------|----------------------|
| Power supply          | 230 V~ ±10% 50/60 Hz |
| Lamp autonomy         | 3 h                  |
| Battery recharge time | 12 h                 |




## Iris / Coral

### Cord operated mechanisms


18521 Cord operated push-button  
18598 Cord operated two-way switch




### One-way - Two-way key switch

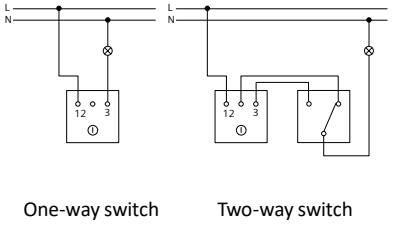

### TMP-3H timer switch




### TMP-4H timer switch



\* = one-way switch and \*\*=push-button




## Dimmers

21553-X




A two-way circuit with 2 dimmers is not possible!


21550-X

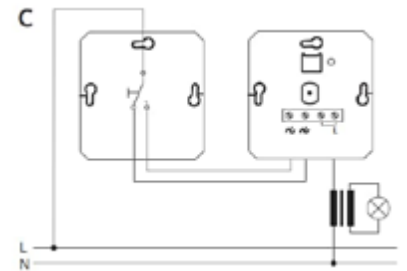

21555-X

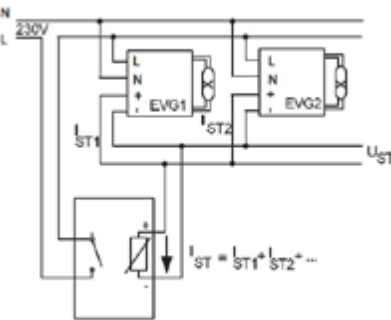


DIP-RLC






Iris / Mega / Coral / Sol television socket outlets

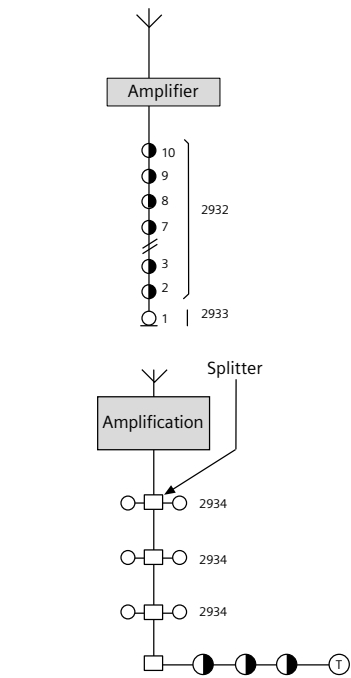

Socket outlet 2934 can be replaced by a maximum of 4 cascaded socket outlets (3x2932+1x2933)

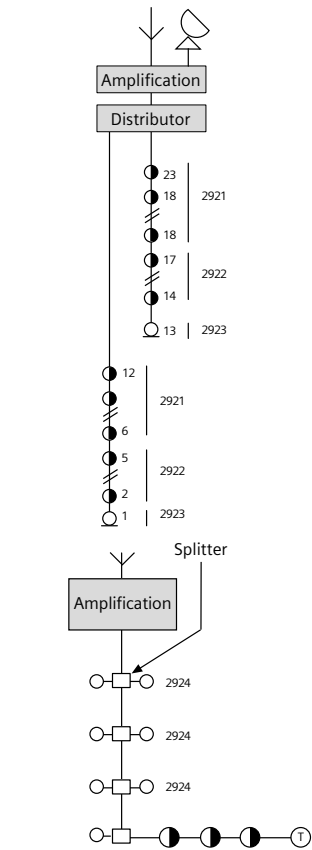

Socket outlet 2924 can be replaced by a maximum of 5 cascaded socket outlets (4x2922+1x2923)

TV socket outlets

MATV distribution system (Master Antenna Television)

Series installation

| Floor    | BJC code | TELEVÉS code | Type | Attenuation (dB) |      |
|----------|----------|--------------|------|------------------|------|
|          |          |              |      | Shunt            | Step |
| 2 to 10* | 2932     | 5231         | A-B  | 9.5              | 1.3  |
| 1        | 2933     | 5230         | T    | 4.5              | ---  |

\* If more than 10 socket outlets in a row are required, another series must be created from a distributor

Shunt installation

| BJC code | TELEVÉS code | Attenuation (dB) |    |
|----------|--------------|------------------|----|
|          |              | TV               | FM |
| 2934     | 5232         | 0.5              | 3  |

R/TV-SAT socket outlets

MATV distribution system (Master Antenna Television) and SMATV (Satellite Master Antenna Television)

Series installation

| Floor    | BJC code | TELEVÉS code | Type | Attenuation (dB) |      |     |     |
|----------|----------|--------------|------|------------------|------|-----|-----|
|          |          |              |      | Shunt            | Step |     |     |
| 12 to 6* | 2921     | 5236         | B    | 20               | 20   | 0.6 | 0.8 |
| 5 to 2   | 2922     | 5227         | A    | 13               | 14   | 1   | 1.2 |
| 1        | 2923     | 5229         | T    | 4                | 5    | --- | --- |

\* If more than 12 socket outlets in a row are required, another series must be created from a distributor

Shunt installation

| BJC code | TELEVÉS code | Attenuation (dB) |     |
|----------|--------------|------------------|-----|
|          |              | TV               | FM  |
| 2924     | 5226         | 0.6              | 1.5 |

Iris / Mega / Coral / television socket outlets

R/TV-SAT, 3 outlets

Serial installation

|           |      |              |
|-----------|------|--------------|
| MODEL     | BJC  | IKUSI        |
| REFERENCE | 2920 | ARTU-S1 2720 |

|                 |         |                  |
|-----------------|---------|------------------|
| Frequency bands | TV:     | 5-68 and 120-862 |
|                 | MHz RD: | 87-108           |
|                 | SAT:    | 950-2150         |

|                                 |           |    |      |
|---------------------------------|-----------|----|------|
| Switch-on attenuation (±0.5 dB) | TV input  |    | 11.5 |
|                                 | RD input  | dB | 11.5 |
|                                 | SAT input |    | 10   |

|                                  |                      |    |   |
|----------------------------------|----------------------|----|---|
| Maximum pass-through attenuation | 5-68 and 120-862 MHz | dB | 1 |
|                                  | 87-108 MHz           |    | 1 |
|                                  | 950-2150 MHz         |    | 4 |

|                   |            |    |    |
|-------------------|------------|----|----|
| Output decoupling | TV output  |    | 25 |
|                   | RD output  | dB | 35 |
|                   | SAT output |    | 16 |

|                             |    |     |
|-----------------------------|----|-----|
| TV-RD and TV SAT decoupling | dB | 15  |
| SAT-RD decoupling           | dB | 25  |
| Current flow per SAT output |    | YES |


Serial installation

|           |      |              |
|-----------|------|--------------|
| MODEL     | BJC  | IKUSI        |
| REFERENCE | 2920 | ARTU-S0 2719 |

|                 |         |                  |
|-----------------|---------|------------------|
| Frequency bands | TV:     | 5-68 and 120-862 |
|                 | MHz RD: | 87-108           |
|                 | SAT:    | 950-2150         |


|                       |           |    |      |
|-----------------------|-----------|----|------|
| Switch-on attenuation | TV input  |    | 11.5 |
|                       | RD input  | dB | 11.5 |
|                       | SAT input |    | 10   |

|                             |    |     |
|-----------------------------|----|-----|
| TV-RD and TV SAT decoupling | dB | 15  |
| SAT-RD decoupling           | dB | 25  |
| Current flow per SAT output |    | YES |

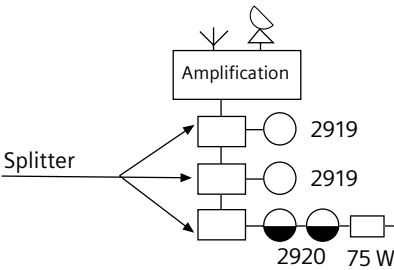


Sound modules

Potentiometers

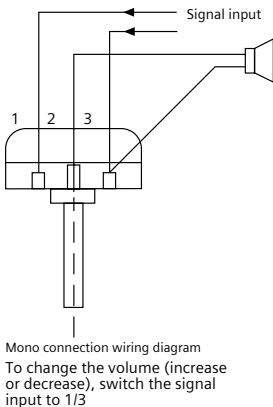


Mono connection wiring diagram  
To change the volume (increase or decrease), switch the signal input to 1/3

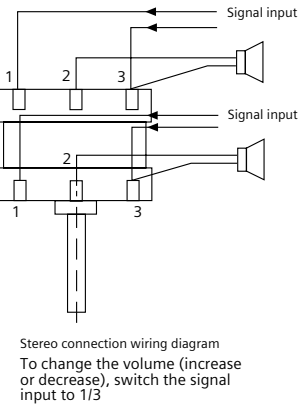

Stereo connection wiring diagram  
To change the volume (increase or decrease), switch the signal input to 1/3

Sound channel

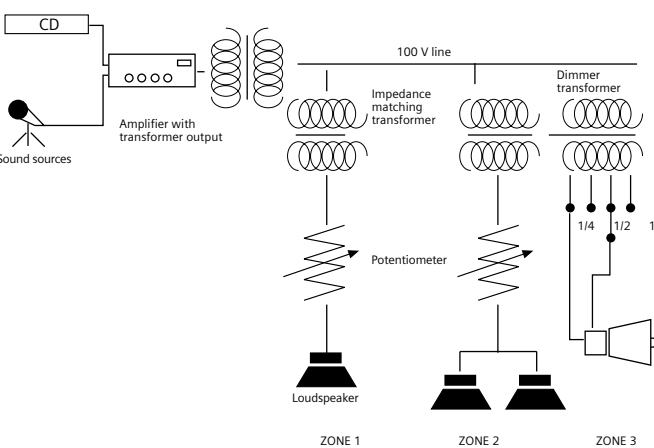

Iris / Mega / Coral voice and data connectors

| Terminal | Conductor colour |
|----------|------------------|
| 2        | Yellow           |
| TX       | Red              |
| L2       | White            |
| L1       | Brown            |
| TS       | Green            |
| T        | Blue             |

**RJ11 telephone user connector**  
(6-pin) connection by insulation piercing

| Number of contact | Label colours | Designation and colours used in Spain | Analogue Telephony | Digital Telephony |
|-------------------|---------------|---------------------------------------|--------------------|-------------------|
| 6                 | Green         | T                                     | Blue               |                   |
| 5                 | Orange        | T                                     | Green              |                   |
| 4                 | Blue/White    | L1                                    | Brown              | Par 1             |
| 3                 | Blue          | L2                                    | White              | Par 1             |
| 2                 | Orange/White  | TX                                    | Red                | Par 2             |
| 1                 | Green/White   | 2                                     | Yellow             |                   |


Voice and Data connectors and adapters

**RJ45 data user connector**  
(8-pin) connection by insulation piercing

| No. of CONTACTS | EIA/TIA 568A |       |
|-----------------|--------------|-------|
| 8               | Brown        | Par 4 |
| 7               | White/Brown  |       |
| 6               | Orange       | Par 1 |
| 5               | White/Blue   | Par 2 |
| 4               | Blue         |       |
| 3               | Orange/White |       |
| 2               | Green        | Par 3 |
| 1               | White/Green  |       |

| No. of CONTACTS | EIA/TIA 568B |       |
|-----------------|--------------|-------|
| 8               | Brown        | Par 4 |
| 7               | White/Brown  |       |
| 6               | Green        | Par 1 |
| 5               | White/Blue   | Par 2 |
| 4               | Blue         |       |
| 3               | White/Green  |       |
| 2               | Orange       | Par 3 |
| 1               | Orange/White |       |

HDMI connector connection

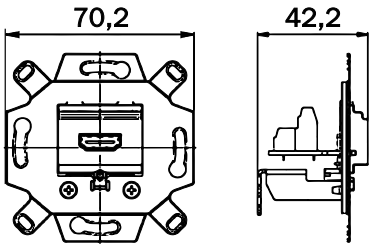

Technical specifications

There are currently 5 standards. The use of numbers to designate the version (HDMI 1.0/1.1, etc.) has been prohibited since November 2011. Devices are not allowed to display the version number since January 2012. Manufacturers are obliged to use descriptive logos instead. There are two types of cable currently in use:

- Category 1: 74.25 MHz (corresponding to HDMI standard), which can be used with combinations of type A-type A, C or D and type C-type C connectors.
- Category 2: 340 MHz (corresponding to HDMI standard), which can be used with combinations of type A-type A, C or D and type C-type C connectors.

All cables used must display the "Approved HDMI®-Associate" logo as a seal of approval. This HDMI connector supports both standard HDMI and high-speed HDMI with type A connectors (provided the appropriate cable is used).



**1.** Strip about 45 mm of the cable's outer sheath off. Remove the outer mesh to expose the cables, then cut off any excess mesh.



**3.** Remove approximately 10 mm of shielding foil from each signal cable. Remove approximately 5 mm of the sheathing from each of the cables and solder the ends with a welding iron. (Alternative: use 0.34 mm cable terminals).



**2.** Shorten each cable to a length of about 35 mm - except for the cable of the shielding!




**4.** Fasten the cable to the holder (1) using a cable tie.



**5.** Connect the cables and shielding according to the colour codes in the table below. (Alternative: use 0.34 mm cable terminals).

| Type             | Terminal number          | Terminal designation | PIN-no. norm | of jack RK | Example of color code for cable assignment (norm left, Rk right) | Description                       |
|------------------|--------------------------|----------------------|--------------|------------|------------------------------------------------------------------|-----------------------------------|
| Plug             | four high speed channels |                      |              |            |                                                                  |                                   |
|                  | 1                        | 2+                   | PIN 1        |            | red/white green                                                  | bundle 1, large gauge+shield wire |
| Jack             | 2                        | 2                    | PIN 2        |            | shield wire (red/white (white/green) - bundle)                   |                                   |
|                  | 3                        | 2-                   | PIN 3        |            | white/green                                                      |                                   |
|                  | 4                        | 1+                   | PIN 4        |            | green/white-brown                                                | bundle 2, large gauge+shield wire |
|                  | 5                        | 1                    | PIN 5        |            | shield wire (green/white (white/brown) - bundle)                 |                                   |
|                  | 6                        | 1-                   | PIN 6        |            | white/brown                                                      |                                   |
|                  | 7                        | 0+                   | PIN 7        |            | blue/white-orange                                                | bundle 3, large gauge+shield wire |
|                  | 8                        | 0                    | PIN 8        |            | shield wire (blue/white (white/orange) - bundle)                 |                                   |
|                  | 9                        | 0-                   | PIN 9        |            | white/orange                                                     |                                   |
|                  | 11                       | CL+                  | PIN 10       |            | brown/blue                                                       | bundle 4, large gauge+shield wire |
|                  | 12                       | 12                   | PIN 11       |            | shield wire (brown/white (blue/white) - bundle)                  |                                   |
|                  | 13                       | CL-                  | PIN 12       |            | white/blue                                                       | bundle 4, large gauge+shield wire |
| seven thin wires |                          |                      |              |            |                                                                  |                                   |
|                  | 14                       | CEC                  | PIN 13       |            | red/pink                                                         | other wires, small gauge          |
|                  | 15                       | NC                   | PIN 14       |            | white/free                                                       |                                   |
|                  | 16                       | SCL                  | PIN 15       |            | orange/green                                                     |                                   |
|                  | 17                       | SDA                  | PIN 16       |            | yellow                                                           |                                   |
|                  | 18                       | GROUND               | PIN 17       |            | grey/brown                                                       |                                   |
|                  | 19                       | +5V                  | PIN 18       |            | violet/white                                                     |                                   |
|                  | 20                       | HPD                  | PIN 19       |            | pink/grey                                                        |                                   |
|                  | 10                       | GROUND               |              |            | shielding                                                        |                                   |



| Pin No. | Pin information                                                                           | Colour Code         | Group / Group Colour                 |
|---------|-------------------------------------------------------------------------------------------|---------------------|--------------------------------------|
| Pin 1   | TMDS Data 2 +                                                                             | Plain Red - White   | Group A / Red Group                  |
| Pin 2   | TMDS Data 2 Shield (Drain)                                                                | Unshielded Cable    |                                      |
| Pin 3   | TMDS Data 2 -                                                                             | Red                 | Group A / Red Group                  |
| Pin 4   | TMDS Data 1 +                                                                             | Plain Green - White |                                      |
| Pin 5   | TMDS Data 1 Shield (Drain)                                                                | Unshielded Cable    | Group B / Green Group                |
| Pin 6   | TMDS Data 1 -                                                                             | Green               |                                      |
| Pin 7   | TMDS Data 0 +                                                                             | Plain Blue - White  | Group C / Blue Group                 |
| Pin 8   | TMDS Data 0 Shield (Drain)                                                                | Unshielded Cable    |                                      |
| Pin 9   | TMDS Data 0 -                                                                             | Blue                | Group D / Brown Group                |
| Pin 10  | TMDS Clock +                                                                              | Plain Brown - White |                                      |
| Pin 11  | TMDS Clock Shield (Drain)                                                                 | Unshielded Cable    | Group D / Brown Group                |
| Pin 12  | TMDS Clock -                                                                              | Plain Brown         |                                      |
| Pin 13  | CEC                                                                                       | Red                 | Group E / Some of Ungrouped Cables   |
| Pin 14  | CEC / HEAC / HEAC Data (Optional, HDMI 1.4+ with Ethernet)                                | Violet              |                                      |
| Pin 15  | SCL (I2C Serial Clock for DDQ)                                                            | Orange              | Group F / Remaining Ungrouped Cables |
| Pin 16  | SDA (I2C Serial Data Line for DDQ)                                                        | Yellow              |                                      |
| Pin 17  | SDA (I2C Serial Data Line for DDQ) / HEAC / HEAC Data (Optional, HDMI 1.4+ with Ethernet) | Green               | Group F / Remaining Ungrouped Cables |
| Pin 18  | +5V (Plug) +5V Power (max 50 mA)                                                          | White               |                                      |
| Pin 19  | Plug Detect (All versions) / HEAC / HEAC Data (Optional, HDMI 1.4+ with Ethernet)         | Blue                |                                      |

Thermostats - For the Iris / Mega / Coral series

Room thermostat  
(Ref. 18544 and Ref. 21544)

Technical information


Product: Thermostat for domestic use in heating and cooling applications

Power supply: 230 V 50/60 Hz  
Resistive shut-off power (BT): 1900 W/230 V~ cos φ = 1  
Inductive shut-off power (BT): 450 W/230 V~ cos φ = 0.6  
Shut-off power (MBT): From 12 to 48 V 10 mA to 500 mA  
Output connection: Changeover contacts to enable connection in heating or ventilation mode

Operating temperature: +0 °C to +40 °C  
Storage temperature: from -5 °C to +60 °C  
Setting range: +5°C to +30°C with stops to delimit a lower range of adjustment, between a minimum and a maximum. To ensure correct adjustment, always turn the button upwards until it slightly exceeds the desired value, before turning it back down to the desired point.

Before installing the front cover of this module, it is possible to set operating limits other than the default extremes of +5 °C and +30 °C. This is done by positioning two toothed gears that act as stops to prevent adjustment beyond the desired limits.

Notes: The regulation will not come into effect until a stabilisation period of 1 to 3 hours has elapsed, depending on the installation conditions. It is not intended for use in conditions other than those provided for in its assembly. It is recommended that these are assembled in individual boxes, since neighbouring elements could affect their operation. Take care to avoid installing them next to windows, doors, heat sources or fans, or behind curtains or similar.

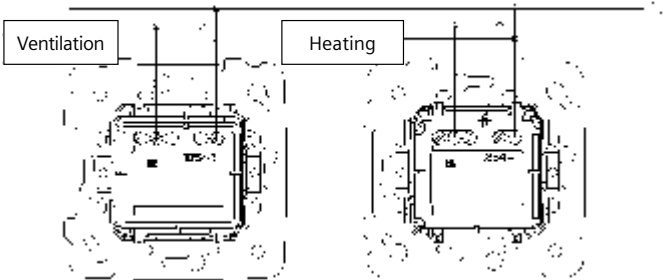

Thermostats - for the Iris / Mega series


Room thermostat (Ref.: 18144)

This thermostat is used for indoor temperature control and controlling electric and hot water convectors, pumps and boilers. It is supplied with a manual one-way connection switch for manual temperature regulation between 5 °C and 30 °C and connection for an external night-time temperature reduction timer switch (5 °C).  
Nominal characteristics:  
Power supply voltage 230 V~.

Cold contact:

- Resistive load max.: 5 A min.: 10 mA
  - Inductive load (cos φ 0.6) max.: 2 A min.: 10 mA
  - Relative humidity max. 95% (non-condensing).
- Do not install next to windows or doors or near heat sources, fans or behind curtains or similar.

Heating contact:

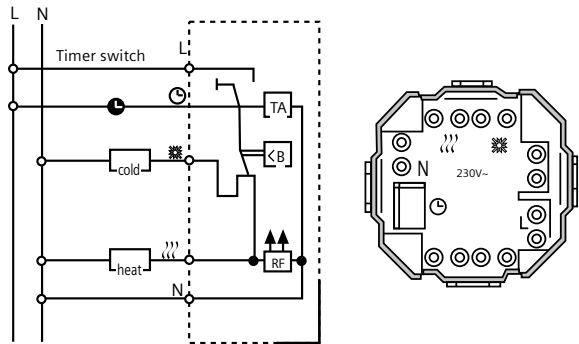

- Resistive load max.: 10 A min.: 10 mA
- Inductive load (cos φ 0.6) max.: 4 A min.: 10 mA

Heated floor thermostat Ref.: 18244

| Code                                             | Range                                             |
|--------------------------------------------------|---------------------------------------------------|
| Floor temperature                                | *...5 (= 10...50 °C)                              |
| Red/green indicator light                        | Colour demand/set-point reduction                 |
| One-way switch                                   | On-off                                            |
| Power supply                                     | 230 VAC (195...253 V) 50 Hz                       |
| Output                                           | Relay                                             |
| Permanent intensity                              | 100 mA...16 A cos φ = 1; 100 mA...2 A cos φ = 0.6 |
| Control algorithm                                | Proportional (similar to PWM)                     |
| Temperature differential                         | -1 °C                                             |
| Remote sensor                                    | Length 4m, may be extended up to 50m              |
| Setpoint reduction                               | Ajustable, 3 K o 5 K                              |
| Range limiter                                    | On the inside of the external wheel               |
| Degree of protection of the housing              | IP30                                              |
| Class                                            | II                                                |
| Impulse voltage calculation                      | 2.5 kV                                            |
| Compression test temperature                     | 75 °C                                             |
| Current and voltage for interference measurement | 230 V, 16 A                                       |
| Ambient temperature                              | 0...40 °C                                         |
| Storage temperature                              | -25...70 °C                                       |
| Weight                                           | 90 g                                              |

Motion detectors - for Iris / Mega / Coral / Viva Series

Spherical motion detector  
(Ref.: 18555)


Unlike other motion detectors that only react to moving heat sources, this detector is also activated by sound. This means that although it must initially be activated by movement, once the light has been switched on, it will not switch off when movement ceases, as long as sound can be heard in the surroundings.  
The sensitivity of this detector has been designed to detect the outline of the human body, logically including children. It will also react to some animals, mainly dogs of a certain size. While this is inevitable, it is usually advantageous as it chases away unwanted animals. As long as there is movement, the connected lamps will remain on. Once movement stops, they will switch off automatically after the predetermined time has elapsed. After a mandatory 3-second reset delay, the detector is ready to be activated again.

Technical information


Power supply 230 VAC +6%/-10%  
Detection angle 180° horizontal  
60° vertical

2-wire connection, triac output  
Maximum load: 40-300 Max. Incandescent/Halogen  
· Range (1.2-2.2 m mounting height), max. 8 m for lateral movement, approx. 3 m for forward movement  
· Timing Timing from 4 sec. to 10 min.  
· Twilight level of 5 to 1000 lux  
· Dimensions LxH 87x87 mm  
Depth 36 mm  
· Degree of protection IP20, II  
· Housing material ABS


Replacement of an existing single pole one-way switch




Placement of 2 detectors in parallel (maximum 2) in the same room



Operation as a staircase timer switch in combination with push-buttons (normally open)







Operation as a staircase timer switch in combination with push-buttons (normally closed)




18555-3/23555-3  
(3 wire, relay output)


- Resistive load 2300 W, 10 A max., cos φ: 1
- Inductive load 1150 VA, 5 A max., cos φ: 0.5
- Halogen lamps with a 1000 VA transformer
- Electronic ballasts e.g. 25x36 W (140 F max.)

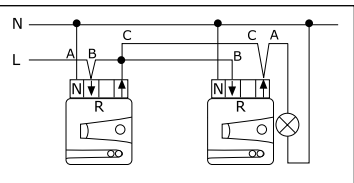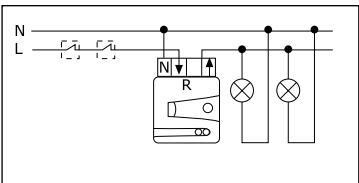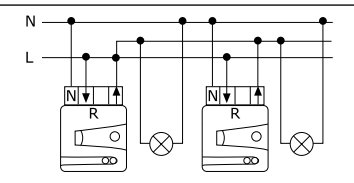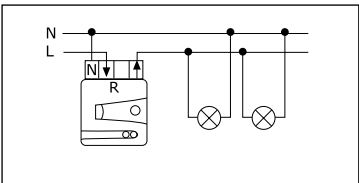


Industrial equipment - Cetact industrial socket outlets

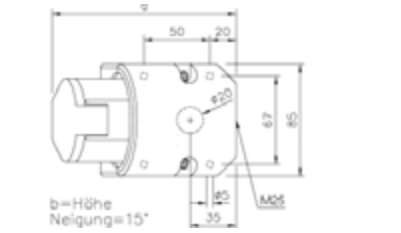


|                                     |         |         |         |         |         |         |
|-------------------------------------|---------|---------|---------|---------|---------|---------|
| INDUSTRIAL PLUGS AND SOCKET OUTLETS |         |         |         |         |         |         |
| IP44 Wall-mounted socket outlets    |         |         |         |         |         |         |
| Reference                           | CT-9963 | CT-9971 | CT-9981 | CT-9964 | CT-9972 | CT-9982 |
| Amps                                | 16      | 16      | 16      | 32      | 32      | 32      |
| Poles                               | 2P+E    | 3P+E    | 3P+N+E  | 2P+E    | 3P+E    | 3P+N+E  |
| a                                   | 140     | 141     | 139     | 152     | 152     | 153     |
| b                                   | 89      | 92      | 97      | 100     | 100     | 105     |
| m                                   | 25      | 25      | 25      | 25      | 25      | 25      |

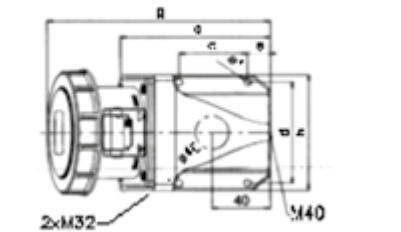


|                                  |         |         |
|----------------------------------|---------|---------|
| IP67 Wall-mounted socket outlets |         |         |
| Reference                        | CT-9946 | CT-9947 |
| Amps                             | 63      | 63      |
| Poles                            | 3P+E    | 3P+N+E  |
| a                                | 170     | 170     |
| b                                | 118     | 118     |
| c                                | 136     | 136     |
| d                                | 104     | 104     |
| e                                | 17      | 17      |
| f                                | 6       | 6       |
| g                                | 215     | 215     |
| h                                | 180     | 180     |
| M                                | 40      | 40      |

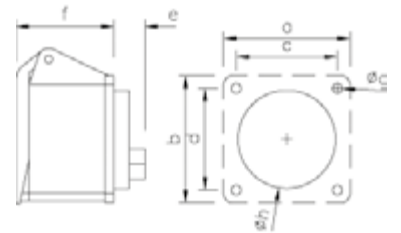

|                                  |         |         |         |         |         |         |
|----------------------------------|---------|---------|---------|---------|---------|---------|
| IP44 Panel-mounted socket outlet |         |         |         |         |         |         |
| Reference                        | CT-9967 | CT-9975 | CT-9985 | CT-9968 | CT-9976 | CT-9986 |
| Amps                             | 16      | 16      | 16      | 32      | 32      | 32      |
| Poles                            | 2P+E    | 3P+E    | 3P+N+E  | 2P+E    | 3P+E    | 3P+N+E  |
| axb                              | 70      | 70      | 70      | 70      | 70      | 70      |
| cx d                             | 56      | 56      | 56      | 56      | 56      | 56      |
| e                                | 28      | 25      | 28      | 29      | 29      | 29      |
| f                                | 46      | 51      | 48      | 61      | 61      | 60      |
| g                                | 5.5     | 5.5     | 5.5     | 5.5     | 5.5     | 5.5     |
| h                                | 51      | 45      | 56      | 56      | 56      | 56      |

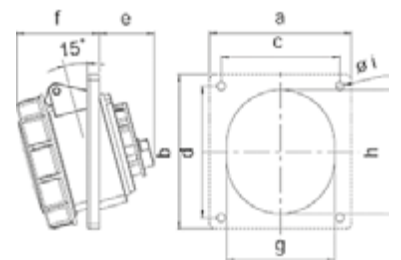


|                                  |          |          |          |          |          |          |
|----------------------------------|----------|----------|----------|----------|----------|----------|
| IP67 Panel-mounted socket outlet |          |          |          |          |          |          |
| Reference                        | CT-71363 | CT-71473 | CT-71483 | CT-71367 | CT-71477 | CT-71487 |
| Amps                             | 16       | 16       | 16       | 32       | 32       | 32       |
| Poles                            | 2P+E     | 3P+E     | 3P+N+E   | 2P+E     | 3P+E     | 3P+N+E   |
| a                                | 70       | 70       | 80       | 80       | 80       | 80       |
| b                                | 85       | 85       | 97       | 97       | 97       | 97       |
| c                                | 50       | 50       | 60       | 60       | 60       | 60       |
| d                                | 65       | 65       | 73       | 73       | 73       | 73       |
| e                                | 20       | 19       | 19       | 21       | 21       | 22       |
| f                                | 68       | 69       | 70       | 83       | 83       | 84       |
| g                                | 50       | 55       | 65       | 65       | 65       | 70       |
| h                                | 50       | 55       | 65       | 65       | 65       | 70       |
| i                                | 5.5      | 5.5      | 5.5      | 5.5      | 5.5      | 5.5      |

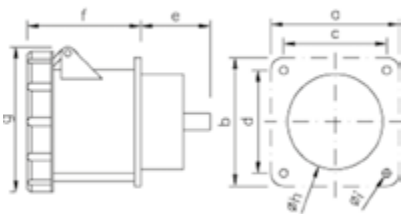


|                                  |         |         |
|----------------------------------|---------|---------|
| IP67 Panel-mounted socket outlet |         |         |
| Reference                        | CT-9948 | CT-9949 |
| Amps                             | 63      | 63      |
| Poles                            | 3P+E    | 3P+N+E  |
| axb                              | 100     | 100     |
| cx d                             | 80      | 80      |
| e                                | 50      | 50      |
| f                                | 80      | 80      |
| g                                | 114     | 114     |
| h                                | 85      | 85      |
| i                                | 7       | 7       |


Industrial equipment - Cetact industrial socket outlets

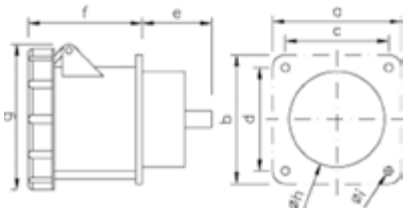


|                                  |         |         |
|----------------------------------|---------|---------|
| IP67 Panel-mounted socket outlet |         |         |
| Reference                        | CT-9954 | CT-9955 |
| Amps                             | 125     | 125     |
| Poles                            | 3P+E    | 3P+N+E  |
| axb                              | 120     | 120     |
| cx d                             | 100     | 100     |
| e                                | 68      | 68      |
| f                                | 90      | 90      |
| g                                | 126     | 126     |
| h                                | 68      | 68      |
| i                                | 7       | 7       |

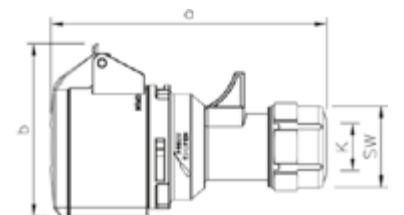


|                 |          |          |          |          |          |          |
|-----------------|----------|----------|----------|----------|----------|----------|
| IP44 Connectors |          |          |          |          |          |          |
| Reference       | CT-71213 | CT-71214 | CT-71215 | CT-71223 | CT-71224 | CT-71225 |
| Amps            | 16       | 16       | 16       | 32       | 32       | 32       |
| Poles           | 2P+E     | 3P+E     | 3P+N+E   | 2P+E     | 3P+E     | 3P+N+E   |
| a               | 129      | 135      | 142      | 159      | 159      | 165      |
| b               | 76       | 80       | 89       | 92       | 92       | 98       |
| k               | 6-15     | 6-15     | 8-16     | 10-20    | 10-20    | 12-22    |
| sw              | 38       | 38       | 42       | 50       | 50       | 50       |

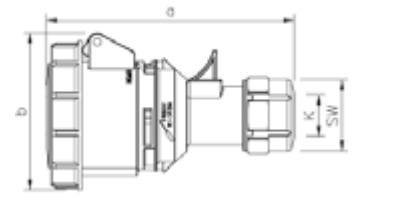


|                 |          |          |          |          |          |          |
|-----------------|----------|----------|----------|----------|----------|----------|
| IP67 Connectors |          |          |          |          |          |          |
| Reference       | CT-73303 | CT-73413 | CT-73423 | CT-73306 | CT-73416 | CT-73426 |
| Amps            | 16       | 16       | 16       | 32       | 32       | 32       |
| Poles           | 2P+E     | 3P+E     | 3P+N+E   | 2P+E     | 3P+E     | 3P+N+E   |
| a               | 133      | 139      | 145      | 162      | 162      | 168      |
| b               | 78       | 84       | 92       | 96       | 96       | 102      |
| k               | 6-15     | 6-15     | 8-16     | 10-20    | 10-20    | 12-22    |
| sw              | 38       | 38       | 42       | 50       | 50       | 50       |

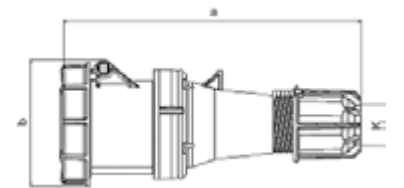

|                 |         |         |
|-----------------|---------|---------|
| IP67 Connectors |         |         |
| Reference       | CT-9950 | CT-9951 |
| Amps            | 63      | 63      |
| Poles           | 3P+E    | 3P+N+E  |
| a               | 269     | 269     |
| b               | 114     | 114     |
| k               | 36      | 36      |

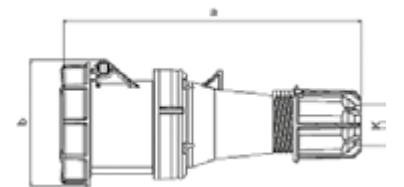


|                 |         |         |
|-----------------|---------|---------|
| IP67 Connectors |         |         |
| Reference       | CT-9956 | CT-9957 |
| Amps            | 125     | 125     |
| Poles           | 3P+E    | 3P+N+E  |
| a               | 287     | 287     |
| b               | 124     | 124     |
| k               | 50      | 50      |

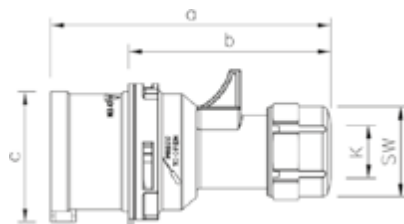


|            |          |          |          |          |          |          |
|------------|----------|----------|----------|----------|----------|----------|
| IP44 plugs |          |          |          |          |          |          |
| Reference  | CT-71013 | CT-71014 | CT-71015 | CT-71023 | CT-71024 | CT-71025 |
| Amps       | 16       | 16       | 16       | 32       | 32       | 32       |
| Poles      | 2P+E     | 3P+E     | 3P+N+E   | 2P+E     | 3P+E     | 3P+N+E   |
| a          | 118      | 124      | 131      | 146      | 146      | 152      |
| b          | 82       | 88       | 95       | 100      | 100      | 106      |
| c          | 47       | 53       | 61       | 63       | 63       | 70       |
| k          | 6-15     | 6-15     | 8-16     | 10-20    | 10-20    | 12-22    |
| sw         | 38       | 38       | 42       | 50       | 50       | 50       |




Industrial equipment - Cetact industrial socket outlets




|            |          |          |          |          |          |          |
|------------|----------|----------|----------|----------|----------|----------|
| IP67 plugs |          |          |          |          |          |          |
| Reference  | CT-77303 | CT-77413 | CT-77423 | CT-77306 | CT-77416 | CT-77426 |
| Amps       | 16       | 16       | 16       | 32       | 32       | 32       |
| Poles      | 2P+E     | 3P+E     | 3P+N+E   | 2P+E     | 3P+E     | 3P+N+E   |
| a          | 118      | 124      | 132      | 146      | 146      | 152      |
| b          | 71       | 79       | 87       | 93       | 93       | 100      |
| k          | 6-15     | 6-15     | 8-16     | 10-20    | 10-20    | 12-22    |
| sw         | 38       | 38       | 42       | 50       | 50       | 50       |

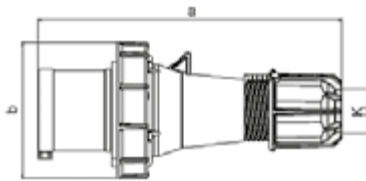


|            |                    |
|------------|--------------------|
| IP67 plugs |                    |
| Reference  | CT-9952    CT-9953 |
| Amps       | 63        63       |
| Poles      | 3P+E     3P+N+E    |
| a          | 257       257      |
| b          | 114       114      |
| k          | 36        36       |

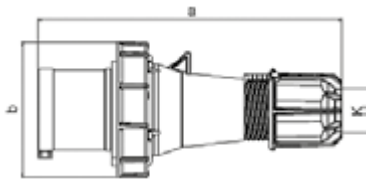

|            |                    |
|------------|--------------------|
| IP67 plugs |                    |
| Reference  | CT-9958    CT-9959 |
| Amps       | 125        125     |
| Poles      | 3P+E     3P+N+E    |
| a          | 270       270      |
| b          | 131       131      |
| k          | 50        50       |




|                  |          |          |          |
|------------------|----------|----------|----------|
| IP44 angle plugs |          |          |          |
| Reference        | CT-75302 | CT-75412 | CT-75422 |
| Amps             | 16       | 16       | 16       |
| Poles            | 2P+E     | 3P+E     | 3P+N+E   |
| a                | 104      | 108      | 101      |
| b                | 67       | 72       | 65       |
| c                | 78       | 92       | 98       |

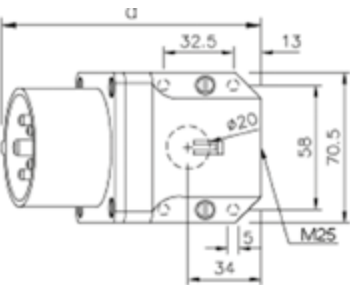


|                          |         |         |         |         |
|--------------------------|---------|---------|---------|---------|
| IP44 wall-mounted inlets |         |         |         |         |
| Reference                | CT-9979 | CT-9962 | CT-9980 | CT-9990 |
| Amps                     | 16      | 32      | 32      | 32      |
| Poles                    | 3P+E    | 2P+E    | 3P+E    | 3P+N+E  |
| a                        | 121     | 131     | 131     | 132     |
| b                        | 76      | 83      | 83      | 85      |

Industrial equipment - Cetact industrial socket outlets




INDUSTRIAL PLUGS AND SOCKET OUTLETS FOR EXTRA-LOW VOLTAGE


|                                                   |       |
|---------------------------------------------------|-------|
| IP44 Extra-low voltage wall-mounted socket outlet |       |
| Reference                                         | I-162 |
| Amps                                              | 16    |
| Poles                                             | 2     |
| a                                                 | 119   |
| b                                                 | 84.5  |




|                                                              |       |
|--------------------------------------------------------------|-------|
| IP44 Extra-low voltage panel-mounted socket outlet, straight |       |
| Reference                                                    | I-362 |
| Amps                                                         | 16    |
| Poles                                                        | 2     |
| axb                                                          | 70    |
| cx d                                                         | 56    |
| e                                                            | 19    |
| f                                                            | 40    |
| g                                                            | 5.5   |
| h                                                            | 43    |

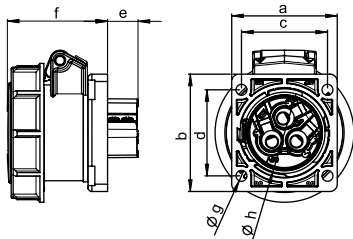


|                                                              |        |
|--------------------------------------------------------------|--------|
| IP67 Extra-low voltage panel-mounted socket outlet, straight |        |
| Reference                                                    | I-3622 |
| Amps                                                         | 16     |
| Poles                                                        | 2      |

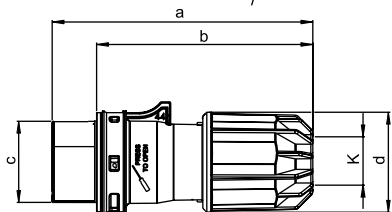

|                             |       |
|-----------------------------|-------|
| IP44 Extra-Low voltage plug |       |
| Reference                   | I-062 |
| Amps                        | 16    |
| Poles                       | 2     |
| a                           | 132   |
| b                           | 110   |
| c                           | 41    |
| d                           | 51    |
| k                           | 8-24  |

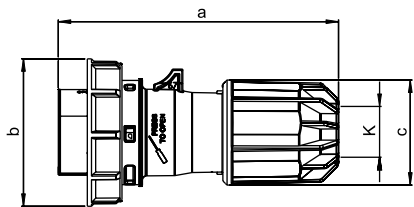


|                             |        |
|-----------------------------|--------|
| IP67 Extra-low voltage plug |        |
| Reference                   | I-0622 |
| Amps                        | 16     |
| Poles                       | 2      |

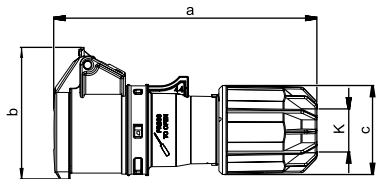


|                                  |       |
|----------------------------------|-------|
| IP44 Extra-low voltage connector |       |
| Reference                        | I-262 |
| Amps                             | 16    |
| Poles                            | 2     |
| a                                | 150   |
| b                                | 75    |
| c                                | 51    |
| k                                | 25    |

Industrial Material - TCP boxes


Polycarbonate · Colour Grey RAL 7035 · Degree of protection IP55 (UNE 20324), IK08 (UNE-EN 50102) in a vertical position

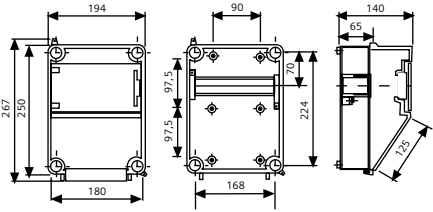


**T-13**  
TCP box with capacity for  
8 x 17.5 mm modules

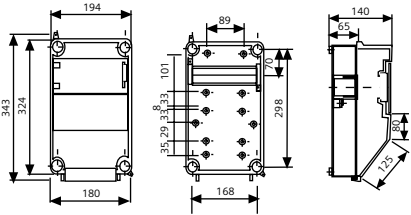

**T-15**  
TCP box with capacity for  
8 x 17.5 mm modules

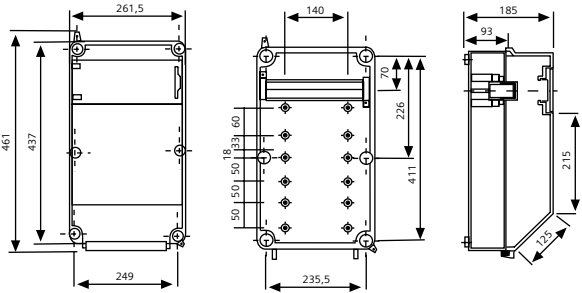


**T-17**  
TCP box with capacity for  
12 x 17.5 mm modules

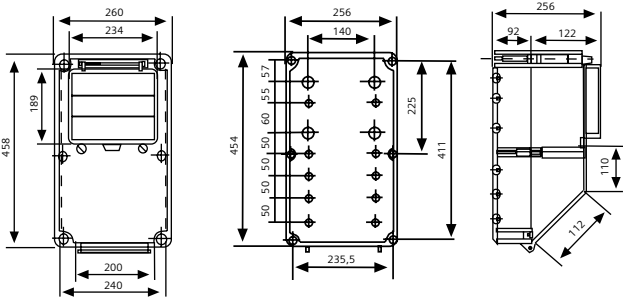


**T-16 (IP54)**  
TCP box with capacity for  
24 x 17.5 mm modules

Material industrial - Watertight mounting boxes and connection boxes


MARINER SERIES




|               | A     | B     | C    | D    | E       |
|---------------|-------|-------|------|------|---------|
| <b>I-6201</b> | 93.5  | 93.5  | 53.5 | 77.5 | 5.5 (2) |
| <b>I-6202</b> | 113.5 | 113.5 | 73.5 | 97.5 | 5.5 (2) |
| <b>I-6203</b> | 135   | 135   | 95   | 115  | 5.5 (4) |
| <b>I-6204</b> | 155   | 155   | 115  | 135  | 5.5 (4) |
| <b>I-6205</b> | 182   | 242   | 125  | 214  | 6 (4)   |
| <b>I-6207</b> | 182   | 242   | 125  | 214  | 6 (4)   |




ALUMINIUM SERIES



|             | A   | B   | C   | D   | E  |
|-------------|-----|-----|-----|-----|----|
| <b>4063</b> | 174 | 214 | 130 | 156 | Ø7 |
| <b>4064</b> | 214 | 264 | 170 | 206 | Ø7 |
| <b>4065</b> | 174 | 214 | 130 | 156 | Ø7 |
| <b>4066</b> | 214 | 264 | 170 | 206 | Ø7 |



|             | A   | B   | C   | D   | E  |
|-------------|-----|-----|-----|-----|----|
| <b>4022</b> | 94  | 94  | 108 | 64  | Ø6 |
| <b>4032</b> | 114 | 114 | 128 | 84  | Ø6 |
| <b>4042</b> | 136 | 136 | 150 | 98  | Ø6 |
| <b>4052</b> | 156 | 156 | 170 | 118 | Ø6 |
| <b>4053</b> | 156 | 156 | 170 | 118 | Ø6 |
| <b>4020</b> | 94  | 94  | 108 | 64  | Ø6 |
| <b>4030</b> | 114 | 114 | 128 | 84  | Ø6 |
| <b>4040</b> | 136 | 136 | 150 | 98  | Ø6 |
| <b>4050</b> | 156 | 156 | 170 | 118 | Ø6 |



|             | A   | B   | C  | D   | E  |
|-------------|-----|-----|----|-----|----|
| <b>4000</b> | 60  | 70  | 67 | 98  | Ø6 |
| <b>4002</b> | 114 | 128 | 84 | 114 | Ø6 |
| <b>4021</b> | 94  | 108 | 64 | 94  | Ø6 |
| <b>4031</b> | 114 | 128 | 84 | 114 | Ø6 |

Discontinued products January 2026

|           |                                                      |
|-----------|------------------------------------------------------|
| 16000-DR  | FRAME I NARROW WITH FIXING FRAME                     |
| 16000-PL  | FRAME I NARROW WITH FIXING FRAME                     |
| 16001-DR  | FRAME I WIDE WITH FIXING FRAME                       |
| 16001-PL  | FRAME I WIDE WITH FIXING FRAME                       |
| 16001-PLX | FRAME I WIDE WITH FIXING FRAME AND CLAWS             |
| 16002-DR  | FRAME II WIDE WITH FIX FRAME                         |
| 16002-DRX | FRAME II WIDE WITH FIX FRAME AND CLAWS               |
| 16002-PL  | FRAME II WIDE WITH FIX FRAME                         |
| 16002-PLX | FRAME II WIDE WITH FIX FRAME AND CLAWS               |
| 16003-DR  | FRAME III WIDE WITH FIXING FRAME                     |
| 16003-PL  | FRAME III WIDE WITH FIXING FRAME                     |
| 16033-M   | NARROW BLANK COVER                                   |
| 16038-M   | DIMMER WITH FIXING FRAME                             |
| 16090-M   | MIXED SOCKET (NARROW) 10/16 A 250 V                  |
| 16190-M   | MIXED SOCKET + E (NARROW) 10/16 A 250 V              |
| 16321-M   | R/TV/SAT COVER                                       |
| 16330-M   | TV/FM SOCKET OUTLET COVER                            |
| 16342-PL  | FRAME I WIDE AMERICAN W/FIX. FRAME BOX               |
| 16351-DR  | FRAME I NARROW AMERICAN                              |
| 16351-PL  | FRAME I NARROW AMERICAN                              |
| 16352-DR  | FRAME I WIDE AMERICAN                                |
| 16352-PL  | FRAME I WIDE AMERICAN                                |
| 16353-DR  | FRAME III NARROW AMERICAN                            |
| 16353-PL  | FRAME III NARROW AMERICAN                            |
| 16360     | SURF. MOUNT. BOX 1/2/3-GANG AMER. FRAME              |
| 16461     | SURF. MOUNT. BOX FOR 2-GANG FRAME                    |
| 16661-DR  | FRAME I NARROW (ESTRELLA SER. M. BOXES)              |
| 16661-PL  | FRAME I NARROW (ESTRELLA SER. M. BOXES)              |
| 16662-DR  | FRAME I WIDE (ESTRELLA SER. MOUNT. BOX)              |
| 16662-PL  | FRAME I WIDE (ESTRELLA SER. MOUNT. BOX)              |
| 16663-DR  | FRAME III NARROW (ESTREL. SER. M. BOXES)             |
| 16663-PL  | FRAME III NARROW (ESTREL. SER. M. BOXES)             |
| 16664-DR  | 4-GANG FRAME (ESTRELLA SER. M. BOXES)                |
| 16664-PL  | FRAME 4 NARROW (ESTRELLA SER. M. BOXES)              |
| 16705-M   | NARROW ROCKER                                        |
| 16708-M   | ONE-WAY DP SWITCH NARROW ROCKER                      |
| 16716-M   | BELL PUSH-BUTTON NARROW ROCKER                       |
| 16717-M   | LIGHT PUSH-BUTTON NARROW ROCKER                      |
| 16722-M   | COVER FOR NARROW 2P SOCKET                           |
| 16724-M   | SAFETY PROTECTION SOCKET OUTLET COVER                |
| 17034-M   | WIDE CABLE OUTLET                                    |
| 17095-M   | CATEGORY 5 RJ45 CONNECTOR (8-PIN)                    |
| 17705-ML  | WIDE ROCKER WITH LENS                                |
| 17708-M   | ONE-WAY DP SWITCH WIDE ROCKER SWITCH                 |
| 17714-M   | ROCKER WITH LIGHTED LABELLING FIELD                  |
| 17716-ML  | BELL PUSH. WIDE ROC. WITH LENS                       |
| 17717-M   | LIGHT PUSH-BUTTON WIDE ROCKER SWITCH                 |
| 17760-M   | COVER WITH POTENTIOMETER BUTTON                      |
| 17769-M   | PUSH./1-W ROCKER SWITCH SET FOR BLINDS               |
| 18001-CJ  | FRAME 1-GANG HORIZONTAL-VERTICAL                     |
| 18001-RR  | FRAME 1-GANG HORIZONTAL-VERTICAL                     |
| 18002-CJ  | FRAME 2-GANG HORIZONTAL                              |
| 18002-RR  | FRAME 2-GANG HORIZONTAL                              |
| 18003-CJ  | FRAME 3-GANG HORIZONTAL                              |
| 18003-RR  | FRAME 3-GANG HORIZONTAL                              |
| 18004-CJ  | FRAME 4-GANG HORIZONTAL                              |
| 18004-RR  | FRAME 4-GANG HORIZONTAL                              |
| 18005-CJ  | FRAME 5-GANG HORIZONTAL                              |
| 18005-RR  | FRAME 5-GANG HORIZONTAL                              |
| 18024-AX  | IRIS, SCHUKO MONOBL. SAFETY PROTECTION, BEIGE, CLAW  |
| 18029-A   | FUSE HOLDER CAP                                      |
| 18029-CJ  | FUSE HOLDER CAP                                      |
| 18029-RR  | FUSE HOLDER CAP                                      |
| 18033-CJ  | BLANK COVER                                          |
| 18033-CJX | BLANK COVER WITH CLAWS                               |
| 18033-RR  | BLANK COVER                                          |
| 18033-RRX | BLANK COVER WITH CLAWS                               |
| 18049-A   | MULTIPLE SOCKET FOR DATA CON. W/LAB. F.              |
| 18049-AN  | MULTIPLE SOCKET FOR DATA CON. W/LAB. F.              |
| 18049-CH  | MULTI. SOCKET FOR DATA CONNECTORS CHOC.              |
| 18049-CJ  | MULTIPLE SOCKET FOR DATA CON. W/LAB. F.              |
| 18049-MA  | MULTIPLE SOCKET FOR DATA CON. W/LAB. F.              |
| 18049-OD  | MULTIPLE SOCKET FOR DATA CON. W/LAB. F.              |
| 18049-RR  | MULTIPLE SOCKET FOR DATA CON. W/LAB. F.              |
| 18068-CJ  | KEY CARD ONE-WAY/TWO-WAY SWITCH                      |
| 18068-RR  | KEY CARD ONE-WAY/TWO-WAY SWITCH                      |
| 18080-CH  | FRENCH PHONE CONNECTOR, CHOCOLATE                    |
| 18080-MA  | FRENCH PHONE CONNECTOR                               |
| 18102-CJ  | FRAME 2-GANG VERTICAL                                |
| 18102-RR  | FRAME 2-GANG VERTICAL                                |
| 18103-CJ  | FRAME 3-GANG VERTICAL                                |
| 18103-RR  | FRAME 3-GANG VERTICAL                                |
| 18104-CJ  | FRAME 4-GANG VERTICAL                                |
| 18104-RR  | FRAME 4-GANG VERTICAL                                |
| 18144-A   | ROOM THERMOSTAT                                      |
| 18200-CJ  | TIMED KEY CARD SWITCH FRAME (IRIS SER.)              |
| 18200-RR  | TIMED KEY CARD SWITCH FRAME (IRIS SER.)              |
| 18320-CJ  | R/TV/SAT SOCKET OUTLET COVER                         |
| 18320-RR  | R/TV/SAT SOCKET OUTLET COVER                         |
| 18330-CJ  | TV/FM SOCKET OUTLET COVER                            |
| 18330-RR  | TV/FM SOCKET OUTLET COVER                            |
| 18341-RR  | R/TV/SAT SOCKET OUTLET COVER (3-OUTLET)              |
| 18482     | 6-PIN TEL SOCK. OUT INS. RJ11- SCREW TERM            |
| 185001-A  | IRIS IP44 1-GANG FRAME                               |
| 185002-A  | IRIS IP44 2-GANG FRAME                               |
| 185006-A  | IRIS IP44 TWO-WAY SWITCH-ONE-WAY SWITCH              |
| 185006-AL | IRIS IP44 TWO-WAY SWITCH-ONE-WAY SWITCH. W/OUT LIGHT |
| 185006-AX | IRIS IP44 TWO-WAY SWITCH-ONE-WAY SWITCH W/CLAW       |
| 185007-A  | IRIS IP44 INTERMEDIATE SWITCH                        |
| 185008-A  | IRIS IP44 2 POLE ONE-WAY SWITCH                      |
| 185010-A  | IRIS IP44 DOUBLE TWO-WAY SWITCH                      |

|            |                                                 |
|------------|-------------------------------------------------|
| 185010-AX  | IRIS IP44 DOUBLE TWO-WAY SWITCH W/CLAWS         |
| 185016-A   | IRIS IP44 "BELL" PUSH-BUTTON                    |
| 185016-AL  | IRIS IP44 "BELL" PUSH-BUTTON W/OUT LIGHT        |
| 185016-ALX | IRIS IP44 BELL PUSH-BUTTON W/OUT LIGHT, CLAW.   |
| 185016-AX  | IRIS IP44 BELL PUSH-BUTTON W/CLAWS              |
| 185017-A   | IRIS IP44 "LIGHT" PUSH-BUTTON                   |
| 185017-AL  | IRIS IP44 "LIGHT" PUSH-BUTTON INDIC. LIGHT      |
| 185024-A   | IRIS IP44 SCHUKO® SOCKET OUTLET WITH SAFETY.    |
| 185033-A   | IRIS IP44 BLANK COVER                           |
| 18506-L    | TWO-WAY SWITCH WITH INDICATOR LIGHT             |
| 185065-A   | IRIS IP44 BLINDS DOUBLE PUSH-BUTTON             |
| 18511-L    | DOUBLE PUSH-BUTTON WITH INDICATOR LIGHT         |
| 18571      | FRENCH SOCK. MECH. SAFETY PROTECTION IN COVER   |
| 185935-AX  | IRIS IP44 R-TV/SAT SOCKET INDIVID. OUTLET, CLAW |
| 18705-CJ   | 1-WAY/2-WAY/INTERM. ROCKER SWITCH               |
| 18705-CJL  | 1-WAY/2-WAY/INT. ROCK. SW. WITH LENS            |
| 18705-RR   | 1-WAY/2-WAY/INTERM. ROCKER SWITCH               |
| 18705-RRL  | 1-WAY/2-WAY/INT. ROCK. SW. WITH LENS            |
| 18708-A    | ONE-WAY DP ROCKER SWITCH                        |
| 18708-AL   | ONE-WAY DP ROCKER SW. WITH LENS                 |
| 18708-CJ   | ONE-WAY DP ROCKER SWITCH                        |
| 18708-CJL  | ONE-WAY DP ROCKER SW. WITH LENS                 |
| 18708-RR   | ONE-WAY DP ROCKER SWITCH                        |
| 18708-RRL  | ONE-WAY DP ROCKER SW. WITH LENS                 |
| 18709-CJ   | SET 2F 1-WAY/2-WAY ROCKER SWITCHES              |
| 18709-CJL  | SET 2F 1-WAY/2-WAY ROCKER SWITCHES              |
| 18709-RR   | SET 2F 1-WAY/2-WAY ROCKER SWITCHES              |
| 18709-RRL  | SET 2F 1-WAY/2-WAY ROCKER SWITCHES              |
| 18711-CJ   | SET 2 2F PUSH. ROCKERS FOR BLINDS               |
| 18711-RR   | SET 2 2F PUSH. ROCKERS FOR BLINDS               |
| 18714-A    | ROCKER WITH LIGHTED LABELLING FIELD             |
| 18714-CJ   | ROCKER WITH LIGHTED LABELLING FIELD             |
| 18714-RR   | ROCKER WITH LIGHTED LABELLING FIELD             |
| 18715-A    | SET 2-WAY/PUSH-BUTTON ROCKER SWITCHES           |
| 18715-AL   | SET 2-WAY/PUSH. ROCKERS WITH LENS               |
| 18715-CJ   | SET 2-WAY/PUSH-BUTTON ROCKER SWITCHES           |
| 18715-CJL  | SET 2-WAY/PUSH. ROCKERS WITH LENS               |
| 18715-RR   | SET 2-WAY/PUSH-BUTTON ROCKER SWITCHES           |
| 18716-CJ   | BELL PUSH-BUTTON ROCKER SWITCH                  |
| 18716-CJL  | BELL PUSH. ROCKER SW. WITH LENS                 |
| 18716-RR   | BELL PUSH-BUTTON ROCKER SWITCH                  |
| 18717-CJ   | LIGHT PUSH-BUTTON ROCKER SWITCH                 |
| 18717-CJL  | LIGHT PUSH. ROCKER SW. WITH LENS                |
| 18717-RR   | LIGHT PUSH-BUTTON ROCKER SWITCH                 |
| 18717-RRL  | LIGHT PUSH. ROCKER SW. WITH LENS                |
| 18724-CJ   | SAFETY PROTECTION SOCKET OUTLET COVER           |
| 18724-RR   | SAFETY PROTECTION SOCKET OUTLET COVER           |
| 18728-A    | COVER WITH CLIP (FUSES)                         |
| 18728-CJ   | COVER WITH CLIP (FUSES)                         |
| 18728-RR   | COVER WITH CLIP (FUSES)                         |
| 18730-CJ   | PILOT LIGHT COVER                               |
| 18730-RR   | PILOT LIGHT COVER                               |
| 18734-CJ   | CABLE OUTPUT COVER                              |
| 18734-RR   | CABLE OUTPUT COVER                              |
| 18742-A    | SOUND MOD. ADAPTER (SONELCO, EIS & TEZ)         |
| 18742-CJ   | SOUND MOD. ADAPTER (SONELCO, EIS & TEZ)         |
| 18742-RR   | SOUND MOD. ADAPTER (SONELCO, EIS & TEZ)         |
| 18743-CJ   | EGI SOUND MODULE ADAPTER                        |
| 18743-RR   | EGI SOUND MODULE ADAPTER                        |
| 18744-A    | COVER & BUTTON FOR ELECTRONIC THERMOSTAT        |
| 18744-CJ   | COVER & BUTTON FOR ELECTRONIC THERMOSTAT        |
| 18744-RR   | COVER & BUTTON FOR ELECTRONIC THERMOSTAT        |
| 18749-RR   | IRIS COVER WITH DIMMER BUTTON                   |
| 18760-A    | POTENTIOMETER COVER & BUTTON                    |
| 18760-CJ   | POTENTIOMETER COVER & BUTTON                    |
| 18760-RR   | POTENTIOMETER COVER & BUTTON                    |
| 18763-A    | DIN LOUDSPEAKER SOCKET OUTLET FRAME             |
| 18763-CJ   | DIN LOUDSPEAKER SOCKET OUTLET FRAME             |
| 18763-RR   | DIN LOUDSPEAKER SOCKET OUTLET FRAME             |
| 18765-CJ   | PUSH./1-W ROCKER SWITCH SET FOR BLINDS          |
| 18765-RR   | PUSH./1-W ROCKER SWITCH SET FOR BLINDS          |
| 18776-A    | COVER FOR RCA STEREO SOCKET OUTLET              |
| 18776-CJ   | COVER FOR RCA STEREO SOCKET OUTLET              |
| 18776-RR   | COVER FOR RCA STEREO SOCKET OUTLET              |
| 18778-CJ   | IRIS, MULTI. CONNECT. COVER, JAI. COPPER        |
| 18778-RR   | IRIS, MULTI. CONNECT. COVER, RUBY RED           |
| 18796-CJ   | ROTARY SWITCH COVER AND BUTTON                  |
| 18796-RR   | ROTARY SWITCH COVER AND BUTTON                  |
| 18814-A    | IRIS SAFETY PROTECTION COVER, FOR SCHUKO DELTA  |
| 18868-CJ   | TIMED KEY CARD SWITCH COVER                     |
| 18868-RR   | TIMED KEY CARD SWITCH COVER                     |
| 18882-A    | RJ11 TEL. SOCK. OUT COVER (SCRW TERMINAL)       |
| 18882-AN   | RJ11 TEL. SOCK. OUT COVER (SCRW TERMINAL)       |
| 18882-CH   | RJ11 TEL SOCK. OUT COVER (SCW TERM.) CHOC       |
| 18882-CJ   | RJ11 TEL. SOCK. OUT COVER (SCRW TERMINAL)       |
| 18882-MA   | RJ11 TEL. SOCK. OUT COVER (SCRW TERMINAL)       |
| 18882-OD   | RJ11 TEL. SOCK. OUT COVER (SCRW TERMINAL)       |
| 18882-RR   | RJ11 TEL. SOCK. OUT COVER (SCRW TERMINAL)       |
| 19582-X    | TELEPHONE SOCKET (6 PINS) WITH CLAWS            |
| 19782-CJ   | TELEPHONE SOCK. OUT COVER (6 PINS)              |
| 19782-RR   | TELEPHONE SOCK. OUT COVER (6 PINS)              |
| 19783-A    | RJ11/RJ45 CONNECTOR COVER WITH LABEL. F.        |
| 19783-CJ   | RJ11/RJ45 CONNECTOR COVER WITH LABEL. F.        |
| 19783-RR   | RJ11/RJ45 CONNECTOR COVER WITH LABEL. F.        |
| 19882-CJ   | COVER FOR 2F ADAPTER (RJ11-RJ45)                |
| 19882-RR   | COVER FOR 2F ADAPTER (RJ11-RJ45)                |
| 19883-A    | COVER 2 RJ11/RJ45 CONNECTORS W/LABEL. F.        |
| 19883-CJ   | COVER 2 RJ11/RJ45 CONNECTORS W/LABEL. F.        |
| 19883-RR   | COVER 2 RJ11/RJ45 CONNECTORS W/LABEL. F.        |
| 21600-AT   | WHEAT YELLOW INTERMEDIATE EMBELLISHER           |
| 21600-MR   | REFLEX BROWN INTERMEDIATE EMBELLISHER           |

Discontinued products January 2026

|            |                                                   |
|------------|---------------------------------------------------|
| 21600-OC   | OCEAN BLUE INTERMEDIATE EMBELLISHER               |
| 21714      | ROCKER W/LIGHTED LABEL. FIELD FOR PUSH.           |
| 21714-DP   | ROCKER W/LIGHTED LABEL. FIELD FOR PUSH.           |
| 21714-GL   | ROCKER W/LIGHTED LABEL. FIELD FOR PUSH.           |
| 21714-GS   | ROCKER W/LIGHTED LABEL. FIELD FOR PUSH.           |
| 21714-PL   | ROCKER W/LIGHTED LABEL. FIELD FOR PUSH.           |
| 21760      | POTENTIOMETER COVER & BUTTON                      |
| 21771      | II+TT FRENCH SAFETY COVER                         |
| 21771-DP   | II+TT FRENCH SAFETY COVER                         |
| 21771-GL   | II+TT FRENCH SAFETY COVER                         |
| 21771-GS   | II+TT FRENCH SAFETY COVER                         |
| 21771-PL   | II+TT FRENCH SAFETY COVER                         |
| 21776      | COVER FOR RCA STEREO SOCKET OUTLET                |
| 21776-DP   | COVER FOR RCA STEREO SOCKET OUTLET                |
| 21776-GL   | COVER FOR RCA STEREO SOCKET OUTLET                |
| 21776-GS   | COVER FOR RCA STEREO SOCKET OUTLET                |
| 21776-PL   | COVER FOR RCA STEREO SOCKET OUTLET                |
| 21782      | CORAL, RJ11 COVER, WHITE                          |
| 21782-DP   | RJ11 TELEPHONE SOCKET OUTLET COVER                |
| 21782-GL   | RJ11 TELEPHONE SOCKET OUTLET COVER                |
| 21782-GS   | RJ11 TELEPHONE SOCKET OUTLET COVER                |
| 21782-PL   | RJ11 TELEPHONE SOCKET OUTLET COVER                |
| 21796      | ROTARY SWITCH COVER AND BUTTON                    |
| 21796-DP   | ROTARY SWITCH COVER AND BUTTON                    |
| 21796-GL   | ROTARY SWITCH COVER AND BUTTON                    |
| 21796-GS   | ROTARY SWITCH COVER AND BUTTON                    |
| 21796-PL   | ROTARY SWITCH COVER AND BUTTON                    |
| 21905      | ONE-WAY SWITCH MOUNTED IN FRAME                   |
| 21906      | TWO-WAY SWITCH MOUNTED IN FRAME                   |
| 21907      | INTERMEDIATE SWITCH MOUNTED IN FRAME              |
| 21909      | COMBINATION 2 ONE-WAY SWITCHES + FRAME            |
| 21910      | COMBINATION 2 TWO-WAY SWITCHES + FRAME            |
| 21916      | BELL PUSH-BUTTON MOUNTED IN FRAME                 |
| 21917      | LIGHT PUSH-BUTTON MOUNTED IN FRAME                |
| 21924      | LAT. SCHUKO® SOCKET. SAFETY WITH CORAL FRAME      |
| 21930      | TV/FM COVER WITH FRAME                            |
| 21982      | 6-PIN TEL. SOCK. OUT MOUNTED IN FRAME             |
| 22001-AFCL | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-AFL  | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-AGL  | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-APL  | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-BNCL | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-BNL  | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-BPCL | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-BPL  | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-BSL  | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-DGL  | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-DMCL | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-DML  | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-GCC  | FRAME 1-GANG HORIZONTAL-VERTICAL, ZAM             |
| 22001-GCCL | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-MMCL | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-MSL  | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22001-NECL | 1-GANG INDICATOR FRAME, ZAMAK                     |
| 22002-GCC  | FRAME 2-GANG HORIZONTAL, ZAMAK                    |
| 22003-GCC  | FRAME 3-GANG HORIZONTAL, ZAMAK                    |
| 22004-GCC  | FRAME 4-GANG HORIZONTAL, ZAMAK                    |
| 22049-AC   | MULTI. SOCKET FOR DATA CONNECTORS                 |
| 22049-AF   | MULTI. SOCKET FOR DATA CONNECTORS                 |
| 22049-AFX  | MULT. SOCKET FOR DATA CONNECTORS W/CLAWS          |
| 22049-AP   | MULTI. SOCKET FOR DATA CONNECTORS                 |
| 22049-BN   | MULTI. SOCKET FOR DATA CONNECTORS                 |
| 22049-BP   | MULTI. SOCKET FOR DATA CONNECTORS                 |
| 22049-BPX  | MULT. SOCKET FOR DATA CONNECTORS W/CLAWS          |
| 22049-BS   | MULTI. SOCKET FOR DATA CONNECTORS                 |
| 22049-BSX  | MULT. SOCKET FOR DATA CONNECTORS W/CLAWS          |
| 22049-DM   | MULTI. SOCKET FOR DATA CONNECTORS                 |
| 22049-DMX  | MULT. SOCKET FOR DATA CONNECTORS W/CLAWS          |
| 22049-MS   | MULTI. SOCKET FOR DATA CONNECTORS                 |
| 22080-AF   | FRENCH PHONE CONNECTOR                            |
| 22080-BP   | FRENCH PHONE CONNECTOR (MABE PEARL WH)            |
| 22080-BS   | FRENCH PHONE CONNECTOR                            |
| 22080-DM   | FRENCH PHONE CONNECTOR                            |
| 22080-MS   | FRENCH PHONE CONNECTOR                            |
| 22102-GCC  | FRAME 2-GANG VERTICAL, ZAMAK                      |
| 22103-GCC  | FRAME 3-GANG VERTICAL, ZAMAK                      |
| 22104-GCC  | FRAME 4-GANG VERTICAL, ZAMAK                      |
| 22760-AF   | POTENTIOMETER COVER & BUTTION                     |
| 22760-AP   | POTENTIOMETER COVER & BUTTON                      |
| 22760-BN   | POTENTIOMETER COVER & BUTTON                      |
| 22760-BP   | POTENTIOMETER COVER & BUTTON                      |
| 22760-BS   | POTENTIOMETER COVER & BUTTION                     |
| 22760-DM   | POTENTIOMETER COVER & BUTTON                      |
| 22760-MS   | POTENTIOMETER COVER & BUTTON                      |
| 22796-AF   | ROTARY SWITCH COVER AND BUTTON                    |
| 22796-AP   | ROTARY SWITCH COVER AND BUTTON                    |
| 22796-BN   | ROTARY SWITCH COVER AND BUTTON                    |
| 22796-BP   | ROTARY SWITCH COVER AND BUTTON                    |
| 22796-BS   | ROTARY SWITCH COVER AND BUTTON                    |
| 22796-DM   | ROTARY SWITCH COVER AND BUTTON                    |
| 22796-MS   | ROTARY SWITCH COVER AND BUTTON                    |
| 23482-GL   | VIVA, RJ11 CONNECTOR, LAVA GREY                   |
| 23482-GLX  | VIVA, RJ11 CONNECTOR, LAVA GREY, CLAWS            |
| 23482-PL   | VIVA, RJ11 CONNECTOR, MOON SILVER                 |
| 23482-PLX  | VIVA, RJ11 CONNECTOR, MOON SIL. CLAWS             |
| 23482-X    | VIVA, RJ11 CONNECTOR, CLAWS, WHITE                |
| 23586-2GL  | VIVA, 2F RJ45 CONNECTOR CAT6, LAVA G              |
| 23586-2GLX | VIVA, 2F RJ45 CONNECT. CAT6, LAVA G, CLAW         |
| 23586-2PL  | VIVA, 2F RJ45 CONNECTOR CAT6, MOON S              |
| 23586-2PLX | VIVA, 2F RJ45 CONNEC CAT6, MOON S, CLAW           |
| 23586-2X   | VIVA, DOUBLE RJ45 CONNECTOR: CAT. 6, CLAWS, WHITE |

|           |                                            |
|-----------|--------------------------------------------|
| 23586-GL  | VIVA, RJ45 CONNECTOR CAT6, LAVA GREY       |
| 23586-GLX | VIVA, RJ45 CONNECTOR CAT6, LAVA G, CLAWS   |
| 23586-PL  | VIVA, RJ45 CONNECTOR CAT6, MOON SILVER     |
| 23586-PLX | VIVA, RJ45 CONNECTOR CAT6, MOON S, CLAWS   |
| 23586-X   | VIVA, RJ45 CONNECTOR: CAT. 6, CLAWS, WHITE |
| 2918      | R-TV-SAT SOCKET 3 OUTPUTS                  |
| 2921      | R/TV-SAT SOCKET (INTERM. 6 TO 12)          |
| 2922      | R/TV-SAT SOCKET (INTERM. 2 TO 5)           |
| 2923      | R/TV-SAT SOCKET (FINAL)                    |
| 2924      | R/TV-SAT SOCKET (INDIVIDUAL OUTLET)        |
| 2932      | TV-FM SOCKET (INST. SERIES FLOOR 2 TO 10)  |
| S18001-A  | IRIS, 1-GANG HORIZONTAL FRAME, BEIGE       |
| S18002-A  | IRIS, 2-GANG HORIZONTAL FRAME, BEIGE       |
| S18003-A  | IRIS, 3-GANG HORIZONTAL FRAME, BEIGE       |
| S18004-A  | IRIS, 4-GANG HORIZONTAL FRAME, BEIGE       |
| S18005-A  | IRIS, 5-GANG HORIZ. FRAME, BEIGE           |
| S18102-A  | IRIS, 2-GANG VERTICAL FRAME, BEIGE         |
| S18103-A  | IRIS, 3-GANG VERTICAL FRAME, BEIGE         |
| S18104-A  | IRIS, 4-GANG VERTICAL FRAME, BEIGE         |

Reference index

| Reference | Page                        | Reference | Page         | Reference   | Page         |
|-----------|-----------------------------|-----------|--------------|-------------|--------------|
| 0708.10   | 163                         | 17760     | 213          | 18039-3AZ   | 62, 118, 151 |
| 14129     | 214                         | 17769     | 211          | 18049       | 86           |
| 16-BAST   | 197                         | 17796     | 211          | 18049-AN    | 86           |
| 16-BAST-G | 197                         | 17897     | 213          | 18049-CH    | 86           |
| 16-GAR    | 95, 131, 165, 190, 197, 207 | 18001     | 96           | 18049-MA    | 86           |
| 16000     | 215                         | 18001-A   | 96           | 18049-OD    | 86           |
| 16001     | 215                         | 18001-AN  | 96           | 18068       | 65           |
| 16002     | 215                         | 18001-BC  | 96           | 18068-A     | 65           |
| 16003     | 215                         | 18001-BF  | 105          | 18068-AN    | 65           |
| 16028     | 214                         | 18001-CH  | 96           | 18068-BF    | 104          |
| 16033     | 214                         | 18001-MA  | 96           | 18068-CH    | 65           |
| 16034     | 212                         | 18001-OD  | 96           | 18068-MA    | 65           |
| 16038     | 212                         | 18002     | 96           | 18068-OD    | 65           |
| 16082     | 213                         | 18002-A   | 96           | 18102       | 96           |
| 16090     | 212                         | 18002-AN  | 96           | 18102-A     | 96           |
| 16095     | 213                         | 18002-BC  | 96           | 18102-AN    | 96           |
| 16190     | 212                         | 18002-BF  | 105          | 18102-BC    | 96           |
| 16310     | 215                         | 18002-CH  | 96           | 18102-BF    | 105          |
| 16311     | 215                         | 18002-MA  | 96           | 18102-CH    | 96           |
| 16312     | 215                         | 18002-OD  | 96           | 18102-MA    | 96           |
| 16313     | 215                         | 18003     | 96           | 18102-OD    | 96           |
| 16321     | 214                         | 18003-A   | 96           | 18103       | 96           |
| 16330     | 214                         | 18003-AN  | 96           | 18103-A     | 96           |
| 16331     | 214                         | 18003-BC  | 96           | 18103-AN    | 96           |
| 16341     | 215                         | 18003-BF  | 105          | 18103-BC    | 96           |
| 16342     | 215                         | 18003-CH  | 96           | 18103-CH    | 96           |
| 16351     | 215                         | 18003-MA  | 96           | 18103-MA    | 96           |
| 16352     | 215                         | 18003-OD  | 96           | 18103-OD    | 96           |
| 16353     | 215                         | 18004     | 96           | 18104       | 96           |
| 16505     | 196, 197, 210               | 18004-A   | 96           | 18104-A     | 96           |
| 16506     | 196, 197, 210               | 18004-AN  | 96           | 18104-AN    | 96           |
| 16507     | 196, 197, 210               | 18004-BC  | 96           | 18104-BC    | 96           |
| 16508     | 196, 210                    | 18004-BF  | 105          | 18104-CH    | 96           |
| 16516     | 196, 197, 210               | 18004-CH  | 96           | 18104-MA    | 96           |
| 16522     | 211                         | 18004-MA  | 96           | 18104-OD    | 96           |
| 16524     | 212                         | 18004-OD  | 96           | 18112       | 97           |
| 16525     | 211                         | 18005     | 96           | 18112-AC    | 97           |
| 16557     | 196, 210                    | 18005-A   | 96           | 18112-BF    | 105          |
| 16558     | 196, 210                    | 18005-AN  | 96           | 18112-CH    | 97           |
| 16559     | 196, 210                    | 18005-BC  | 96           | 18112-MA    | 97           |
| 16605     | 196, 210                    | 18005-CH  | 96           | 18113       | 97           |
| 16652-B   | 217                         | 18005-MA  | 96           | 18113-AC    | 97           |
| 16653-B   | 217                         | 18005-OD  | 96           | 18113-CH    | 97           |
| 16654-B   | 217                         | 18011     | 97           | 18113-MA    | 97           |
| 16656-B   | 217                         | 18011-AC  | 97           | 18144       | 93           |
| 16661-B   | 216                         | 18011-BF  | 105          | 18200       | 65           |
| 16662-B   | 216                         | 18011-CH  | 97           | 18200-A     | 65           |
| 16663-B   | 216                         | 18011-MA  | 97           | 18200-AN    | 65           |
| 16664-B   | 216                         | 18012     | 97           | 18200-CH    | 65           |
| 16668     | 216                         | 18012-AC  | 97           | 18200-MA    | 65           |
| 16705     | 210                         | 18012-BF  | 105          | 18200-OD    | 65           |
| 16705-L   | 210                         | 18012-CH  | 97           | 18244       | 93           |
| 16708     | 210                         | 18012-MA  | 97           | 18320       | 80           |
| 16708-L   | 210                         | 18013     | 97           | 18320-A     | 80           |
| 16716     | 210                         | 18013-AC  | 97           | 18320-AN    | 80           |
| 16716-L   | 210                         | 18013-BF  | 105          | 18320-CH    | 80           |
| 16717     | 210                         | 18013-CH  | 97           | 18320-4P    | 74           |
| 16717-L   | 210                         | 18013-MA  | 97           | 18320-4P-AN | 74           |
| 16722     | 211                         | 18014     | 97           | 18320-4P-CH | 74           |
| 16724     | 212                         | 18014-AC  | 97           | 18320-4P-MA | 74           |
| 16724-R   | 212                         | 18014-BF  | 105          | 18320-4P-OD | 74           |
| 16725     | 211                         | 18014-CH  | 97           | 18320-MA    | 80           |
| 17028     | 214                         | 18014-MA  | 97           | 18320-OD    | 80           |
| 17034     | 212                         | 18024     | 68           | 18330       | 80           |
| 17082     | 213                         | 18024-A   | 68           | 18330-A     | 80           |
| 17095     | 213                         | 18029-AN  | 90           | 18330-AN    | 80           |
| 17596     | 211                         | 18029-MA  | 90           | 18330-BF    | 103          |
| 17705     | 210                         | 18033     | 92           | 18330-CH    | 80           |
| 17705-L   | 210                         | 18033-A   | 92           | 18330-MA    | 80           |
| 17708     | 210                         | 18033-AN  | 92           | 18330-OD    | 80           |
| 17708-L   | 210                         | 18033-CH  | 92           | 18341       | 81           |
| 17716     | 210                         | 18033-MA  | 92           | 18341-A     | 81           |
| 17716-L   | 210                         | 18033-OD  | 92           | 18341-AN    | 81           |
| 17717     | 210                         | 18039-1AZ | 62, 118, 151 | 18341-CH    | 81           |
| 17717-L   | 210                         | 18039-2AZ | 62, 118, 151 | 18341-MA    | 81           |

Reference index

| Reference    | Page                                | Reference   | Page   | Reference     | Page           |
|--------------|-------------------------------------|-------------|--------|---------------|----------------|
| 18341-OD     | 81                                  | 18705-OD    | 56     | 18717-IP-OD   | 72             |
| 18505        | 56, 72, 102, 116, 148               | 18705-ODL   | 56, 57 | 18717-L       | 61             |
| 18506        | 56, 72, 102, 116, 148               | 18708       | 58     | 18717-MA      | 61             |
| 18506-L      | 57, 116, 148                        | 18708-AN    | 58     | 18717-MAL     | 61             |
| 18507        | 56, 72, 102, 116, 148               | 18708-ANL   | 58     | 18717-OD      | 61             |
| 18508        | 58, 116, 148                        | 18708-CH    | 58     | 18717-ODL     | 61             |
| 18509        | 59, 72, 102, 117, 149               | 18708-CHL   | 58     | 18724         | 68             |
| 18510        | 59, 72, 102, 117, 149               | 18708-L     | 58     | 18724-A       | 68             |
| 18511        | 59, 63, 72, 102, 117, 119, 149, 151 | 18708-MA    | 58     | 18724-AN      | 68             |
| 18511-L      | 59, 117, 149                        | 18708-MAL   | 58     | 18724-CH      | 68             |
| 18512        | 61, 72, 102, 118, 150               | 18708-OD    | 58     | 18724-MA      | 68             |
| 18513        | 59, 72, 102, 117, 149               | 18708-ODL   | 58     | 18724-OD      | 68             |
| 18515        | 60, 117, 149                        | 18709       | 59     | 18724-R       | 68             |
| 18516        | 61, 72, 102, 118, 150               | 18709-A     | 59     | 18724-USBC    | 69             |
| 18521        | 64, 103, 202                        | 18709-AL    | 59     | 18724-USBC-AN | 69             |
| 18524        | 68, 73, 103, 121, 153               | 18709-AN    | 59     | 18724-USBC-CH | 69             |
| 18524-USBC   | 69, 121, 153                        | 18709-ANL   | 59     | 18724-USBC-MA | 69             |
| 18528        | 90, 202                             | 18709-BF    | 102    | 18724-USBC-OD | 69             |
| 18530        | 76, 201                             | 18709-CH    | 59     | 18725         | 68             |
| 18531        | 78, 201                             | 18709-CHL   | 59     | 18725-AN      | 68             |
| 18531-4      | 78, 201                             | 18709-IP    | 72     | 18725-CH      | 68             |
| 18534        | 76, 202                             | 18709-IP-AN | 72     | 18725-IP      | 73             |
| 18536        | 77, 201                             | 18709-IP-CH | 72     | 18725-IP-AN   | 73             |
| 18536-A      | 77, 201                             | 18709-IP-MA | 72     | 18725-IP-CH   | 73             |
| 18536-B      | 77, 201                             | 18709-IP-OD | 72     | 18725-IP-MA   | 73             |
| 18540        | 129, 164                            | 18709-L     | 59     | 18725-IP-OD   | 73             |
| 18540-AM     | 164                                 | 18709-MA    | 59     | 18725-MA      | 68             |
| 18540-CM     | 129, 164                            | 18709-MAL   | 59     | 18725-OD      | 68             |
| 18540-PM     | 129                                 | 18709-OD    | 59     | 18728         | 90             |
| 18544        | 92, 204                             | 18709-ODL   | 59     | 18728-CH      | 90             |
| 18555        | 93                                  | 18714       | 62     | 18728-OD      | 90             |
| 18555-3      | 93, 128, 163, 204                   | 18714-AN    | 62     | 18730         | 76, 77, 88, 93 |
| 18560        | 87, 204, 213                        | 18714-CH    | 62     | 18730-A       | 76, 77, 88, 93 |
| 18562        | 87, 204, 213                        | 18714-MA    | 62     | 18730-AN      | 76, 77, 88, 93 |
| 18563-2      | 88, 204                             | 18714-OD    | 62     | 18730-CH      | 76, 77, 88, 93 |
| 18563-4      | 88, 204                             | 18715       | 60     | 18730-MA      | 76, 77, 88, 93 |
| 18564        | 87, 204, 213                        | 18715-AN    | 60     | 18730-OD      | 76, 77, 88, 93 |
| 18565        | 63, 102, 119, 151, 198, 211         | 18715-ANL   | 60     | 18732         | 70             |
| 18569        | 63, 102, 119, 151, 198, 211         | 18715-CH    | 60     | 18732-A       | 70             |
| 18572        | 71, 122, 154                        | 18715-CHL   | 60     | 18732-AN      | 70             |
| 18572-USBC   | 71, 184                             | 18715-L     | 60     | 18732-ANL     | 70             |
| 18575        | 88                                  | 18715-MA    | 60     | 18732-L       | 70             |
| 18576        | 89                                  | 18715-MAL   | 60     | 18732-MA      | 70             |
| 18577        | 89                                  | 18715-OD    | 60     | 18732-MAL     | 70             |
| 18578-HDMI   | 91, 127, 162                        | 18715-ODL   | 60     | 18732-OD      | 70             |
| 18578-HDMI-A | 91, 127, 162                        | 18716       | 61     | 18732-ODL     | 70             |
| 18578-HDMI-G | 91, 127, 162                        | 18716-A     | 61     | 18734         | 64, 76         |
| 18586        | 75, 82, 126, 161, 203               | 18716-AL    | 61     | 18734-A       | 64, 76         |
| 18586-2      | 83, 126, 161, 203                   | 18716-AN    | 61     | 18734-AN      | 64, 76         |
| 18596        | 66                                  | 18716-ANL   | 61     | 18734-BF      | 103            |
| 18598        | 64, 103, 202                        | 18716-BF    | 102    | 18734-CH      | 64, 76         |
| 18605        | 57, 116, 148                        | 18716-CH    | 61     | 18734-MA      | 64, 76         |
| 18606        | 57, 116, 148                        | 18716-CHL   | 61     | 18734-OD      | 64, 76         |
| 18608        | 58, 116, 148                        | 18716-IP    | 72     | 18742         | 78, 94         |
| 18630-AB     | 76                                  | 18716-IP-AN | 72     | 18742-A       | 78             |
| 18630-C      | 76                                  | 18716-IP-CH | 72     | 18742-AN      | 78, 94         |
| 18630-R      | 76                                  | 18716-IP-MA | 72     | 18742-CH      | 78, 94         |
| 18630-V      | 76                                  | 18716-IP-OD | 72     | 18742-MA      | 78, 94         |
| 18668        | 65, 202                             | 18716-L     | 61     | 18742-OD      | 78, 94         |
| 18705        | 56                                  | 18716-MA    | 61     | 18743         | 94             |
| 18705-A      | 56                                  | 18716-MAL   | 61     | 18743-A       | 94             |
| 18705-AL     | 56, 57                              | 18716-OD    | 61     | 18743-AN      | 94             |
| 18705-AN     | 56                                  | 18716-ODL   | 61     | 18743-CH      | 94             |
| 18705-ANL    | 56, 57                              | 18717       | 61     | 18743-MA      | 94             |
| 18705-BF     | 102                                 | 18717-A     | 61     | 18743-OD      | 94             |
| 18705-CH     | 56                                  | 18717-AL    | 61     | 18744         | 92             |
| 18705-CHL    | 56, 57                              | 18717-AN    | 61     | 18744-AN      | 92             |
| 18705-IP     | 72                                  | 18717-ANL   | 61     | 18744-CH      | 92             |
| 18705-IP-AN  | 72                                  | 18717-BF    | 102    | 18744-MA      | 92             |
| 18705-IP-CH  | 72                                  | 18717-CH    | 61     | 18744-OD      | 92             |
| 18705-IP-MA  | 72                                  | 18717-CHL   | 61     | 18749         | 67             |
| 18705-IP-OD  | 72                                  | 18717-4P    | 72     | 18749-A       | 67             |
| 18705-L      | 56, 57                              | 18717-4P-AN | 72     | 18749-AN      | 67             |
| 18705-MA     | 56                                  | 18717-4P-CH | 72     | 18749-CH      | 67             |
| 18705-MAL    | 56, 57                              | 18717-4P-MA | 72     | 18749-MA      | 67             |



Reference index

| Reference     | Page                        |
|---------------|-----------------------------|
| 18749-OD      | 67                          |
| 18760         | 87                          |
| 18760-AN      | 87                          |
| 18760-CH      | 87                          |
| 18760-MA      | 87                          |
| 18760-OD      | 87                          |
| 18765         | 63                          |
| 18765-A       | 63                          |
| 18765-AN      | 63                          |
| 18765-BF      | 102                         |
| 18765-CH      | 63                          |
| 18765-MA      | 63                          |
| 18765-OD      | 63                          |
| 18772         | 71                          |
| 18772-A       | 71                          |
| 18772-AN      | 71                          |
| 18772-CH      | 71                          |
| 18772-MA      | 71                          |
| 18772-OD      | 71                          |
| 18772-USBC    | 71                          |
| 18772-USBC-AN | 71                          |
| 18772-USBC-CH | 71                          |
| 18772-USBC-MA | 71                          |
| 18772-USBC-OD | 71                          |
| 18776         | 89                          |
| 18776-AN      | 89                          |
| 18776-CH      | 89                          |
| 18776-MA      | 89                          |
| 18776-OD      | 89                          |
| 18778         | 91                          |
| 18778-A       | 91                          |
| 18778-AN      | 91                          |
| 18778-CH      | 91                          |
| 18778-MA      | 91                          |
| 18778-OD      | 91                          |
| 18784         | 79                          |
| 18784-A       | 79                          |
| 18784-AN      | 79                          |
| 18784-CH      | 79                          |
| 18784-MA      | 79                          |
| 18784-OD      | 79                          |
| 18796         | 66                          |
| 18796-A       | 66                          |
| 18796-AN      | 66                          |
| 18796-CH      | 66                          |
| 18796-MA      | 66                          |
| 18796-OD      | 66                          |
| 18868         | 65                          |
| 18868-A       | 65                          |
| 18868-AN      | 65                          |
| 18868-CH      | 65                          |
| 18868-MA      | 65                          |
| 18868-OD      | 65                          |
| 18882         | 88, 89                      |
| 18882-A       | 88, 89                      |
| 18882-AN      | 88, 89                      |
| 18882-CH      | 88, 89                      |
| 18882-MA      | 88, 89                      |
| 18882-OD      | 88, 89                      |
| 19039-AZ      | 119, 151, 189               |
| 19505-X       | 124, 155                    |
| 19506-X       | 124, 155                    |
| 19507-X       | 124, 155                    |
| 19509-X       | 124, 155                    |
| 19510-X       | 124, 155                    |
| 19511-2X      | 124, 129, 155, 164          |
| 19511-X       | 124, 155                    |
| 19516-X       | 124, 129, 155, 164          |
| 19532         | 70, 122, 125, 153, 154, 156 |
| 19532-X       | 70, 122, 125, 153, 154, 156 |
| 19563-2       | 127, 163                    |
| 19563-4       | 127, 163                    |
| 19565-X       | 124, 155                    |
| 19569-X       | 124, 155                    |
| 19582         | 82, 126, 161, 203           |

| Reference   | Page                                               |
|-------------|----------------------------------------------------|
| 19582-1     | 75, 82, 84, 103, 125, 126, 127, 156, 161, 162, 203 |
| 19682-1     | 83, 85, 126, 127, 161, 162, 203                    |
| 19782       | 82, 84                                             |
| 19782-A     | 82, 84                                             |
| 19782-AN    | 82, 84                                             |
| 19782-BF    | 103                                                |
| 19782-CH    | 82, 84                                             |
| 19782-IP    | 75                                                 |
| 19782-IP-AN | 75                                                 |
| 19782-IP-CH | 75                                                 |
| 19782-IP-MA | 75                                                 |
| 19782-IP-OD | 75                                                 |
| 19782-MA    | 82, 84                                             |
| 19782-OD    | 82, 84                                             |
| 19783       | 82, 84                                             |
| 19783-A     | 84                                                 |
| 19783-AN    | 82, 84                                             |
| 19783-CH    | 82, 84                                             |
| 19783-MA    | 82, 84                                             |
| 19783-OD    | 82, 84                                             |
| 19882       | 83, 85                                             |
| 19882-A     | 83, 85                                             |
| 19882-AN    | 83, 85                                             |
| 19882-CH    | 83, 85                                             |
| 19882-MA    | 83, 85                                             |
| 19882-OD    | 83, 85                                             |
| 19883       | 83, 85                                             |
| 19883-A     | 85                                                 |
| 19883-AN    | 83, 85                                             |
| 19883-CH    | 83, 85                                             |
| 19883-MA    | 83, 85                                             |
| 19883-OD    | 83, 85                                             |
| 21011       | 206                                                |
| 21011-DP    | 206                                                |
| 21011-GL    | 206                                                |
| 21011-GS    | 206                                                |
| 21011-PL    | 206                                                |
| 21012       | 206                                                |
| 21012-DP    | 206                                                |
| 21012-GL    | 206                                                |
| 21012-GS    | 206                                                |
| 21012-PL    | 206                                                |
| 21013       | 206                                                |
| 21013-DP    | 206                                                |
| 21013-GL    | 206                                                |
| 21013-GS    | 206                                                |
| 21013-PL    | 206                                                |
| 21014       | 206                                                |
| 21014-DP    | 206                                                |
| 21014-GL    | 206                                                |
| 21014-GS    | 206                                                |
| 21014-PL    | 206                                                |
| 21029       | 202                                                |
| 21029-DP    | 202                                                |
| 21029-GL    | 202                                                |
| 21029-GS    | 202                                                |
| 21029-PL    | 202                                                |
| 21112       | 206                                                |
| 21112-DP    | 206                                                |
| 21112-GL    | 206                                                |
| 21112-GS    | 206                                                |
| 21112-PL    | 206                                                |
| 21113       | 206                                                |
| 21113-DP    | 206                                                |
| 21113-GL    | 206                                                |
| 21113-GS    | 206                                                |
| 21113-PL    | 206                                                |
| 21114       | 206                                                |
| 21114-DP    | 206                                                |
| 21114-GL    | 206                                                |
| 21114-GS    | 206                                                |
| 21114-PL    | 206                                                |
| 21133       | 202                                                |
| 21133-DP    | 202                                                |
| 21133-GL    | 202                                                |

| Reference | Page                        |
|-----------|-----------------------------|
| 21133-GS  | 202                         |
| 21133-PL  | 202                         |
| 21139-1   | 180, 196, 211               |
| 21139-2   | 180, 196, 211               |
| 21200     | 202                         |
| 21200-DP  | 202                         |
| 21200-GL  | 202                         |
| 21200-GS  | 202                         |
| 21200-PL  | 202                         |
| 21211     | 206                         |
| 21211-GS  | 206                         |
| 21211-PL  | 206                         |
| 21212     | 206                         |
| 21212-GS  | 206                         |
| 21212-PL  | 206                         |
| 21213     | 206                         |
| 21213-GS  | 206                         |
| 21213-PL  | 206                         |
| 21214     | 206                         |
| 21214-GS  | 206                         |
| 21214-PL  | 206                         |
| 21312     | 206                         |
| 21312-GS  | 206                         |
| 21312-PL  | 206                         |
| 21313     | 206                         |
| 21313-GS  | 206                         |
| 21313-PL  | 206                         |
| 21314     | 206                         |
| 21314-GS  | 206                         |
| 21314-PL  | 206                         |
| 21320     | 205                         |
| 21320-DP  | 205                         |
| 21320-GL  | 205                         |
| 21320-GS  | 205                         |
| 21320-PL  | 205                         |
| 21330     | 205                         |
| 21330-DP  | 205                         |
| 21330-GL  | 205                         |
| 21330-GS  | 205                         |
| 21330-PL  | 205                         |
| 21341     | 205                         |
| 21341-DP  | 205                         |
| 21341-GL  | 205                         |
| 21341-GS  | 205                         |
| 21341-PL  | 205                         |
| 21524     | 200                         |
| 21550-X   | 67, 120, 152, 181, 199      |
| 21553-X   | 67, 120, 152, 181, 199      |
| 21555-X   | 67, 120, 152, 181, 199      |
| 2158000   | 95, 131, 165, 190, 207, 228 |
| 21600     | 206                         |
| 21600-NG  | 206                         |
| 21600-NI  | 206                         |
| 21600-NIM | 206                         |
| 21600-OR  | 206                         |
| 21600-ORM | 206                         |
| 21705     | 196                         |
| 21705-DP  | 196                         |
| 21705-GL  | 196                         |
| 21705-GS  | 196                         |
| 21705-PL  | 196                         |
| 21708     | 196                         |
| 21708-DP  | 196                         |
| 21708-DPL | 196                         |
| 21708-GL  | 196                         |
| 21708-GLL | 196                         |
| 21708-GS  | 196                         |
| 21708-GSL | 196                         |
| 21708-L   | 196                         |
| 21708-PL  | 196                         |
| 21708-PLL | 196                         |
| 21709     | 197                         |
| 21709-DP  | 197                         |
| 21709-DPL | 197                         |
| 21709-GL  | 197                         |

Reference index

| Reference | Page     |
|-----------|----------|
| 21709-GLL | 197      |
| 21709-GS  | 197      |
| 21709-GSL | 197      |
| 21709-L   | 197      |
| 21709-PL  | 197      |
| 21709-PLL | 197      |
| 21716     | 196      |
| 21716-DP  | 196      |
| 21716-DPL | 196      |
| 21716-GL  | 196      |
| 21716-GLL | 196      |
| 21716-GS  | 196      |
| 21716-GSL | 196      |
| 21716-L   | 196      |
| 21716-PL  | 196      |
| 21716-PLL | 196      |
| 21717     | 196      |
| 21717-DP  | 196      |
| 21717-DPL | 196      |
| 21717-GL  | 196      |
| 21717-GLL | 196      |
| 21717-GS  | 196      |
| 21717-GSL | 196      |
| 21717-L   | 196      |
| 21717-PL  | 196      |
| 21717-PLL | 196      |
| 21724     | 200      |
| 21724-DP  | 200      |
| 21724-GL  | 200      |
| 21724-GS  | 200      |
| 21724-PL  | 200      |
| 21724-R   | 200      |
| 21728     | 202      |
| 21728-DP  | 202      |
| 21728-GL  | 202      |
| 21728-GS  | 202      |
| 21728-PL  | 202      |
| 21734     | 202      |
| 21734-DP  | 202      |
| 21734-GL  | 202      |
| 21734-GS  | 202      |
| 21734-PL  | 202      |
| 21742     | 201, 204 |
| 21742-N   | 201, 204 |
| 21743     | 204      |
| 21743-N   | 204      |
| 21744     | 204      |
| 21744-DP  | 204      |
| 21744-GL  | 204      |
| 21744-GS  | 204      |
| 21744-PL  | 204      |
| 21749     | 199      |
| 21749-DP  | 199      |
| 21749-GL  | 199      |
| 21749-GS  | 199      |
| 21749-PL  | 199      |
| 21760     | 204      |
| 21760-DP  | 204      |
| 21760-GL  | 204      |
| 21760-GS  | 204      |
| 21760-PL  | 204      |
| 21763     | 201, 204 |
| 21763-DP  | 201, 204 |
| 21763-GL  | 201, 204 |
| 21763-GS  | 201, 204 |
| 21763-PL  | 201, 204 |
| 21765     | 198      |
| 21765-DP  | 198      |
| 21765-GL  | 198      |
| 21765-GS  | 198      |
| 21765-PL  | 198      |
| 21795     | 203      |
| 21795-DP  | 203      |
| 21795-GL  | 203      |
| 21795-GS  | 203      |

| Reference | Page |
|-----------|------|
| 21795-PL  | 203  |
| 21813     | 200  |
| 21813-DP  | 200  |
| 21813-GL  | 200  |
| 21813-GS  | 200  |
| 21813-PL  | 200  |
| 21868     | 202  |
| 21868-DP  | 202  |
| 21868-GL  | 202  |
| 21868-GS  | 202  |
| 21868-PL  | 202  |
| 21882     | 203  |
| 21882-DP  | 203  |
| 21882-GL  | 203  |
| 21882-GS  | 203  |
| 21882-PL  | 203  |
| 21924     | 200  |
| 22001-AF  | 98   |
| 22001-AFC | 98   |
| 22001-AG  | 99   |
| 22001-AP  | 98   |
| 22001-BN  | 98   |
| 22001-BNC | 98   |
| 22001-BP  | 98   |
| 22001-BPC | 98   |
| 22001-BS  | 98   |
| 22001-DG  | 99   |
| 22001-DM  | 98   |
| 22001-DMC | 98   |
| 22001-MMC | 99   |
| 22001-MS  | 98   |
| 22001-NEC | 99   |
| 22002-AF  | 98   |
| 22002-AFC | 98   |
| 22002-AG  | 99   |
| 22002-AP  | 98   |
| 22002-BN  | 98   |
| 22002-BNC | 98   |
| 22002-BP  | 98   |
| 22002-BPC | 98   |
| 22002-BS  | 98   |
| 22002-DG  | 99   |
| 22002-DM  | 98   |
| 22002-DMC | 98   |
| 22002-MMC | 99   |
| 22002-MS  | 98   |
| 22002-NEC | 99   |
| 22003-AF  | 98   |
| 22003-AFC | 98   |
| 22003-AG  | 99   |
| 22003-AP  | 98   |
| 22003-BN  | 98   |
| 22003-BNC | 98   |
| 22003-BP  | 98   |
| 22003-BPC | 98   |
| 22003-BS  | 98   |
| 22003-DG  | 99   |
| 22003-DM  | 98   |
| 22003-DMC | 98   |
| 22003-MMC | 99   |
| 22003-MS  | 98   |
| 22003-NEC | 99   |
| 22004-AF  | 98   |
| 22004-AFC | 98   |
| 22004-AG  | 99   |
| 22004-AP  | 98   |
| 22004-BN  | 98   |
| 22004-BNC | 98   |
| 22004-BP  | 98   |
| 22004-BPC | 98   |
| 22004-BS  | 98   |
| 22004-DG  | 99   |
| 22004-DM  | 98   |
| 22004-DMC | 98   |
| 22004-MMC | 99   |

| Reference | Page |
|-----------|------|
| 22004-MS  | 98   |
| 22004-NEC | 99   |
| 22029-AC  | 90   |
| 22029-AF  | 90   |
| 22029-AP  | 90   |
| 22029-BN  | 90   |
| 22029-BP  | 90   |
| 22029-BS  | 90   |
| 22029-DM  | 90   |
| 22029-MS  | 90   |
| 22033-AC  | 92   |
| 22033-BN  | 92   |
| 22033-BS  | 92   |
| 22033-MS  | 92   |
| 22049-AC  | 86   |
| 22049-AF  | 86   |
| 22049-AP  | 86   |
| 22049-BN  | 86   |
| 22049-BP  | 86   |
| 22049-BS  | 86   |
| 22049-DM  | 86   |
| 22049-MS  | 86   |
| 22068-AC  | 65   |
| 22068-AF  | 65   |
| 22068-AP  | 65   |
| 22068-BN  | 65   |
| 22068-BP  | 65   |
| 22068-BS  | 65   |
| 22068-DM  | 65   |
| 22068-MS  | 65   |
| 22102-AF  | 98   |
| 22102-AFC | 98   |
| 22102-AG  | 99   |
| 22102-AP  | 98   |
| 22102-BN  | 98   |
| 22102-BNC | 98   |
| 22102-BP  | 98   |
| 22102-BPC | 98   |
| 22102-BS  | 98   |
| 22102-DG  | 99   |
| 22102-DM  | 98   |
| 22102-DMC | 98   |
| 22102-MMC | 99   |
| 22102-MS  | 98   |
| 22102-NEC | 99   |
| 22103-AF  | 98   |
| 22103-AFC | 98   |
| 22103-AG  | 99   |
| 22103-AP  | 98   |
| 22103-BN  | 98   |
| 22103-BNC | 98   |
| 22103-BP  | 98   |
| 22103-BPC | 98   |
| 22103-BS  | 98   |
| 22103-DG  | 99   |
| 22103-DM  | 98   |
| 22103-DMC | 98   |
| 22103-MMC | 99   |
| 22103-MS  | 98   |
| 22103-NEC | 99   |
| 22104-AF  | 98   |
| 22104-AFC | 98   |
| 22104-AG  | 99   |
| 22104-AP  | 98   |
| 22104-BN  | 98   |
| 22104-BNC | 98   |
| 22104-BP  | 98   |
| 22104-BPC | 98   |
| 22104-BS  | 98   |
| 22104-DG  | 99   |
| 22104-DM  | 98   |
| 22104-DMC | 98   |
| 22104-MMC | 99   |
| 22104-MS  | 98   |
| 22104-NEC | 99   |

Reference index

| Reference   | Page         | Reference   | Page | Reference     | Page           |
|-------------|--------------|-------------|------|---------------|----------------|
| 2224-B      | 69, 184, 227 | 22709-BPL   | 59   | 22724-AC      | 68             |
| 2225        | 69, 184, 227 | 22709-BS    | 59   | 22724-AF      | 68             |
| 22320-AC    | 80           | 22709-BSL   | 59   | 22724-AP      | 68             |
| 22320-AF    | 80           | 22709-DM    | 59   | 22724-BN      | 68             |
| 22320-AP    | 80           | 22709-DML   | 59   | 22724-BP      | 68             |
| 22320-BN    | 80           | 22709-IP-AC | 72   | 22724-BS      | 68             |
| 22320-BP    | 80           | 22709-IP-AF | 72   | 22724-DM      | 68             |
| 22320-BS    | 80           | 22709-IP-BP | 72   | 22724-MS      | 68             |
| 22320-DM    | 80           | 22709-IP-BS | 72   | 22724-USBC-AC | 69             |
| 22320-IP-AC | 74           | 22709-MS    | 59   | 22724-USBC-AF | 69             |
| 22320-IP-AF | 74           | 22709-MSL   | 59   | 22724-USBC-AP | 69             |
| 22320-IP-BP | 74           | 22714-AC    | 62   | 22724-USBC-BN | 69             |
| 22320-IP-BS | 74           | 22714-AF    | 62   | 22724-USBC-BP | 69             |
| 22320-MS    | 80           | 22714-AP    | 62   | 22724-USBC-BS | 69             |
| 22330-AC    | 80           | 22714-BN    | 62   | 22724-USBC-DM | 69             |
| 22330-AF    | 80           | 22714-BP    | 62   | 22724-USBC-MS | 69             |
| 22330-AP    | 80           | 22714-BS    | 62   | 22725-AC      | 68             |
| 22330-BN    | 80           | 22714-DM    | 62   | 22725-AF      | 68             |
| 22330-BP    | 80           | 22714-MS    | 62   | 22725-BP      | 68             |
| 22330-BS    | 80           | 22715-AC    | 60   | 22725-BS      | 68             |
| 22330-DM    | 80           | 22715-ACL   | 60   | 22725-IP-AC   | 73             |
| 22330-MS    | 80           | 22715-AF    | 60   | 22725-IP-AF   | 73             |
| 22341-AC    | 81           | 22715-AFL   | 60   | 22725-IP-BP   | 73             |
| 22341-AF    | 81           | 22715-AP    | 60   | 22725-IP-BS   | 73             |
| 22341-AP    | 81           | 22715-APL   | 60   | 22728-AC      | 90             |
| 22341-BN    | 81           | 22715-BN    | 60   | 22728-AF      | 90             |
| 22341-BP    | 81           | 22715-BNL   | 60   | 22728-AP      | 90             |
| 22341-BS    | 81           | 22715-BP    | 60   | 22728-BN      | 90             |
| 22341-DM    | 81           | 22715-BPL   | 60   | 22728-BP      | 90             |
| 22341-MS    | 81           | 22715-BS    | 60   | 22728-BS      | 90             |
| 22705-AC    | 56           | 22715-BSL   | 60   | 22728-DM      | 90             |
| 22705-ACL   | 56, 57       | 22715-DM    | 60   | 22728-MS      | 90             |
| 22705-AF    | 56           | 22715-DML   | 60   | 22730-AC      | 76, 77, 88, 93 |
| 22705-AFL   | 56, 57       | 22715-MS    | 60   | 22730-AF      | 76, 77, 88, 93 |
| 22705-AP    | 56           | 22715-MSL   | 60   | 22730-AP      | 76, 77, 88, 93 |
| 22705-APL   | 56, 57       | 22716-AC    | 61   | 22730-BN      | 76, 77, 88, 93 |
| 22705-BN    | 56           | 22716-ACL   | 61   | 22730-BP      | 76, 77, 88, 93 |
| 22705-BNL   | 56, 57       | 22716-AF    | 61   | 22730-BS      | 76, 77, 88, 93 |
| 22705-BP    | 56           | 22716-AFL   | 61   | 22730-DM      | 76, 77, 88, 93 |
| 22705-BPL   | 56, 57       | 22716-AP    | 61   | 22730-MS      | 76, 77, 88, 93 |
| 22705-BS    | 56           | 22716-APL   | 61   | 22732-AC      | 70             |
| 22705-BSL   | 56, 57       | 22716-BN    | 61   | 22732-ACL     | 70             |
| 22705-DM    | 56           | 22716-BNL   | 61   | 22732-AF      | 70             |
| 22705-DML   | 56, 57       | 22716-BP    | 61   | 22732-AFL     | 70             |
| 22705-IP-AC | 72           | 22716-BPL   | 61   | 22732-AP      | 70             |
| 22705-IP-AF | 72           | 22716-BS    | 61   | 22732-APL     | 70             |
| 22705-IP-BP | 72           | 22716-BSL   | 61   | 22732-BN      | 70             |
| 22705-IP-BS | 72           | 22716-DM    | 61   | 22732-BNL     | 70             |
| 22705-MS    | 56           | 22716-DML   | 61   | 22732-BP      | 70             |
| 22705-MSL   | 56, 57       | 22716-IP-AC | 72   | 22732-BPL     | 70             |
| 22708-AC    | 58           | 22716-IP-AF | 72   | 22732-BS      | 70             |
| 22708-ACL   | 58           | 22716-IP-BP | 72   | 22732-BSL     | 70             |
| 22708-AF    | 58           | 22716-IP-BS | 72   | 22732-DM      | 70             |
| 22708-AFL   | 58           | 22716-MS    | 61   | 22732-DML     | 70             |
| 22708-AP    | 58           | 22716-MSL   | 61   | 22732-MS      | 70             |
| 22708-APL   | 58           | 22717-AC    | 61   | 22732-MSL     | 70             |
| 22708-BN    | 58           | 22717-ACL   | 61   | 22734-AC      | 64, 76         |
| 22708-BNL   | 58           | 22717-AF    | 61   | 22734-AF      | 64, 76         |
| 22708-BP    | 58           | 22717-AFL   | 61   | 22734-AP      | 64, 76         |
| 22708-BPL   | 58           | 22717-AP    | 61   | 22734-BN      | 64, 76         |
| 22708-BS    | 58           | 22717-APL   | 61   | 22734-BP      | 64, 76         |
| 22708-BSL   | 58           | 22717-BN    | 61   | 22734-BS      | 64, 76         |
| 22708-DM    | 58           | 22717-BNL   | 61   | 22734-DM      | 64, 76         |
| 22708-DML   | 58           | 22717-BP    | 61   | 22734-MS      | 64, 76         |
| 22708-MS    | 58           | 22717-BPL   | 61   | 22742-AC      | 78, 94         |
| 22708-MSL   | 58           | 22717-BS    | 61   | 22742-AF      | 78, 94         |
| 22709-AC    | 59           | 22717-BSL   | 61   | 22742-AP      | 78, 94         |
| 22709-ACL   | 59           | 22717-DM    | 61   | 22742-BN      | 78, 94         |
| 22709-AF    | 59           | 22717-DML   | 61   | 22742-BP      | 78, 94         |
| 22709-AFL   | 59           | 22717-IP-AC | 72   | 22742-BS      | 78, 94         |
| 22709-AP    | 59           | 22717-IP-AF | 72   | 22742-DM      | 78, 94         |
| 22709-APL   | 59           | 22717-IP-BP | 72   | 22742-MS      | 78, 94         |
| 22709-BN    | 59           | 22717-IP-BS | 72   | 22743-AC      | 94             |
| 22709-BNL   | 59           | 22717-MS    | 61   | 22743-AF      | 94             |
| 22709-BP    | 59           | 22717-MSL   | 61   | 22743-AP      | 94             |

Reference index

| Reference     | Page   | Reference | Page          | Reference  | Page                        |
|---------------|--------|-----------|---------------|------------|-----------------------------|
| 22743-BN      | 94     | 22783-BS  | 83, 85        | 23201-NP   | 189                         |
| 22743-BP      | 94     | 22783-DM  | 83, 85        | 23201-PL   | 189                         |
| 22743-BS      | 94     | 22783-MS  | 83, 85        | 23244      | 128, 163, 189               |
| 22743-DM      | 94     | 22784-AC  | 79            | 23244-GL   | 189                         |
| 22743-MS      | 94     | 22784-AF  | 79            | 23244-PL   | 189                         |
| 22744-AC      | 92     | 22784-AP  | 79            | 23330      | 187                         |
| 22744-AF      | 92     | 22784-BN  | 79            | 23330-GL   | 187                         |
| 22744-AP      | 92     | 22784-BP  | 79            | 23330-PL   | 187                         |
| 22744-BN      | 92     | 22784-BS  | 79            | 23341      | 187                         |
| 22744-BP      | 92     | 22784-DM  | 79            | 23341-GL   | 187                         |
| 22744-BS      | 92     | 22784-MS  | 79            | 23341-PL   | 187                         |
| 22744-DM      | 92     | 22796-AC  | 66            | 2341       | 95, 131, 165, 190, 207, 228 |
| 22744-MS      | 92     | 22882-AC  | 88, 89        | 2342       | 95, 131, 165, 190, 207, 228 |
| 22749-AC      | 67     | 22882-AF  | 88, 89        | 2343       | 95, 131, 165, 190, 207, 228 |
| 22749-AF      | 67     | 22882-AP  | 88, 89        | 2344       | 95, 131, 165, 190, 228      |
| 22749-AP      | 67     | 22882-BN  | 88, 89        | 2345       | 95, 131, 165, 228           |
| 22749-BN      | 67     | 22882-BP  | 88, 89        | 23460      | 190, 207, 227               |
| 22749-BS      | 67     | 22882-BS  | 88, 89        | 23460-GL   | 190, 207, 227               |
| 22749-DM      | 67     | 22882-DM  | 88, 89        | 23460-PL   | 190, 207, 227               |
| 22749-MS      | 67     | 22882-MS  | 88, 89        | 23461      | 190, 207, 227               |
| 22760-AC      | 87     | 22883-AC  | 82, 84        | 23461-GL   | 190, 207, 227               |
| 22765-AC      | 63     | 22883-AF  | 82, 84        | 23461-PL   | 190, 207, 227               |
| 22765-BN      | 63     | 22883-AP  | 82, 84        | 23482      | 185                         |
| 22765-BS      | 63     | 22883-BN  | 82, 84        | 23482-GL   | 185                         |
| 22765-MS      | 63     | 22883-BP  | 82, 84        | 23482-GLX  | 185                         |
| 22772-AC      | 71     | 22883-BS  | 82, 84        | 23482-PL   | 185                         |
| 22772-AF      | 71     | 22883-DM  | 82, 84        | 23482-PLX  | 185                         |
| 22772-AP      | 71     | 22883-MS  | 82, 84        | 23482-X    | 185                         |
| 22772-BN      | 71     | 22983-AC  | 83, 85        | 23505      | 178                         |
| 22772-BP      | 71     | 22983-AF  | 83, 85        | 23505-GL   | 178                         |
| 22772-BS      | 71     | 22983-AP  | 83, 85        | 23505-GLL  | 179                         |
| 22772-DM      | 71     | 22983-BN  | 83, 85        | 23505-GLLX | 179                         |
| 22772-MS      | 71     | 22983-BP  | 83, 85        | 23505-GLX  | 178                         |
| 22772-USBC-AC | 71     | 22983-BS  | 83, 85        | 23505-PL   | 178                         |
| 22772-USBC-AF | 71     | 22983-DM  | 83, 85        | 23505-PLL  | 179                         |
| 22772-USBC-AP | 71     | 22983-MS  | 83, 85        | 23505-PLX  | 179                         |
| 22772-USBC-BN | 71     | 23001     | 191           | 23505-PLX  | 178                         |
| 22772-USBC-BP | 71     | 23001-A   | 191           | 23505-X    | 178                         |
| 22772-USBC-BS | 71     | 23001-GL  | 191           | 23506      | 178                         |
| 22772-USBC-DM | 71     | 23001-GP  | 191           | 23506-GL   | 178                         |
| 22772-USBC-MS | 71     | 23001-NP  | 191           | 23506-GLL  | 179                         |
| 22776-AC      | 89     | 23001-PL  | 191           | 23506-GLLX | 179                         |
| 22776-AF      | 89     | 23002     | 191           | 23506-GLX  | 178                         |
| 22776-AP      | 89     | 23002-A   | 191           | 23506-PL   | 178                         |
| 22776-BN      | 89     | 23002-GL  | 191           | 23506-PLL  | 179                         |
| 22776-BP      | 89     | 23002-GP  | 191           | 23506-PLLX | 179                         |
| 22776-BS      | 89     | 23002-NP  | 191           | 23506-PLX  | 178                         |
| 22776-DM      | 89     | 23002-PL  | 191           | 23506-X    | 178                         |
| 22776-MS      | 89     | 23003     | 191           | 23507      | 178                         |
| 22778-AC      | 91     | 23003-A   | 191           | 23507-2    | 178                         |
| 22778-AF      | 91     | 23003-GL  | 191           | 23507-2GL  | 178                         |
| 22778-AP      | 91     | 23003-GP  | 191           | 23507-2GLL | 179                         |
| 22778-BN      | 91     | 23003-NP  | 191           | 23507-2PL  | 178                         |
| 22778-BP      | 91     | 23003-PL  | 191           | 23507-2PLL | 179                         |
| 22778-BS      | 91     | 23004     | 191           | 23507-GL   | 178                         |
| 22778-DM      | 91     | 23004-A   | 191           | 23507-GLL  | 179                         |
| 22778-MS      | 91     | 23004-GL  | 191           | 23507-GLLX | 179                         |
| 22782-AC      | 82     | 23004-GP  | 191           | 23507-GLX  | 178                         |
| 22782-AF      | 82, 84 | 23004-NP  | 191           | 23507-PL   | 178                         |
| 22782-BN      | 82     | 23004-PL  | 191           | 23507-PLL  | 179                         |
| 22782-BP      | 82, 84 | 23033     | 188           | 23507-PLLX | 179                         |
| 22782-BS      | 82     | 23033-GL  | 188           | 23507-PLX  | 178                         |
| 22782-DM      | 82, 84 | 23033-GLX | 188           | 23507-X    | 178                         |
| 22782-IP-AC   | 75     | 23033-PL  | 188           | 23508      | 178                         |
| 22782-IP-AF   | 75     | 23033-X   | 188           | 23508-GL   | 178                         |
| 22782-IP-BP   | 75     | 23068-GL  | 189           | 23508-PL   | 178                         |
| 22782-IP-BS   | 75     | 23068-PL  | 189           | 23509      | 178                         |
| 22782-MS      | 82     | 23144     | 128, 163, 189 | 23509-GL   | 178                         |
| 22783-AC      | 83, 85 | 23144-GL  | 189           | 23509-GLL  | 179                         |
| 22783-AF      | 83, 85 | 23144-PL  | 189           | 23509-GLLX | 179                         |
| 22783-AP      | 83, 85 | 23201     | 189           | 23509-GLX  | 178                         |
| 22783-BN      | 83, 85 | 23201-A   | 189           | 23509-PL   | 178                         |
| 22783-BP      | 83, 85 | 23201-GL  | 189           | 23509-PLL  | 179                         |
|               |        | 23201-GP  | 189           | 23509-PLLX | 179                         |
|               |        |           |               | 23509-PLX  | 178                         |

Reference index

| Reference   | Page | Reference     | Page     | Reference     | Page                                           |
|-------------|------|---------------|----------|---------------|------------------------------------------------|
| 23509-X     | 178  | 23526-3PLX    | 183      | 23729         | 181                                            |
| 23510       | 178  | 23526-3X      | 183      | 23729-GL      | 181                                            |
| 23510-GL    | 178  | 23526-USBC    | 182      | 23729-PL      | 181                                            |
| 23510-GLL   | 179  | 23526-USBC-GL | 182      | 2373-I        | 95, 131, 165, 190, 207, 228                    |
| 23510-GLLX  | 179  | 23526-USBC-PL | 182      | 2374-I        | 95, 131, 165, 190, 207, 228                    |
| 23510-GLX   | 178  | 23531         | 188      | 23772-USBC    | 184                                            |
| 23510-PL    | 178  | 23531-3       | 188      | 23772-USBC-GL | 184                                            |
| 23510-PLL   | 179  | 23531-3PL     | 188      | 23772-USBC-PL | 184                                            |
| 23510-PLLX  | 179  | 23531-GL      | 188      | 2393          | 63, 119, 151, 198                              |
| 23510-PLX   | 178  | 23531-PL      | 188      | 2394          | 122, 154                                       |
| 23510-X     | 178  | 23534         | 188      | 2395          | 122, 125, 154, 156                             |
| 23511       | 178  | 23534-GL      | 188      | 2396          | 124, 155                                       |
| 23511-GL    | 178  | 23534-GLX     | 188      | 2918          | 81, 123, 160, 187, 205                         |
| 23511-PL    | 178  | 23534-PL      | 188      | 2921          | 74, 80, 123, 125, 156, 160, 187, 205, 214      |
| 23516       | 178  | 23534-PLX     | 188      | 2922          | 74, 80, 123, 125, 156, 160, 187, 205, 214      |
| 23516-1     | 178  | 23534-X       | 188      | 2923          | 74, 80, 123, 125, 156, 160, 187, 205, 214      |
| 23516-1GL   | 178  | 23536         | 188      | 2924          | 74, 80, 123, 125, 156, 160, 187, 205, 214      |
| 23516-1GLL  | 179  | 23536-GL      | 188      | 2932          | 74, 103, 123, 125, 156, 160, 187, 205, 214     |
| 23516-1GLLX | 179  | 23536-GLX     | 188      | 2933          | 74, 80, 103, 123, 125, 156, 160, 187, 205, 214 |
| 23516-1GLX  | 178  | 23536-PL      | 188      | 2934          | 74, 80, 103, 123, 125, 156, 160, 187, 205, 214 |
| 23516-1PL   | 178  | 23536-PLX     | 188      | 3139          | 62, 118, 151, 180, 198, 211                    |
| 23516-1PLL  | 179  | 23536-X       | 188      | 3186-B        | 75, 82, 83, 125, 126, 156, 161, 185, 203       |
| 23516-1PLLX | 179  | 23555-3       | 182      | 3190          | 84, 85, 127, 162, 186, 203                     |
| 23516-1PLX  | 178  | 23555-3GL     | 182      | 3191          | 84, 85, 127, 162, 186, 203                     |
| 23516-1X    | 178  | 23555-3PL     | 182      | 3201          | 95, 131, 165, 190, 207, 228                    |
| 23516-2     | 178  | 23557         | 178      | 4020          | 242                                            |
| 23516-2GL   | 178  | 23557-GL      | 178      | 4022          | 242                                            |
| 23516-2GLL  | 179  | 23557-PL      | 178      | 4030          | 242                                            |
| 23516-2GLLX | 179  | 23558         | 178      | 4032          | 242                                            |
| 23516-2GLX  | 178  | 23558-GL      | 178      | 4040          | 242                                            |
| 23516-2L    | 179  | 23558-GLL     | 179      | 4042          | 242                                            |
| 23516-2LX   | 179  | 23558-PL      | 178      | 4050          | 242                                            |
| 23516-2PL   | 178  | 23558-PLL     | 179      | 4052          | 242                                            |
| 23516-2PLL  | 179  | 23559         | 178      | 4053          | 242                                            |
| 23516-2PLLX | 179  | 23559-GL      | 178      | 4060          | 242                                            |
| 23516-2PLX  | 178  | 23559-PL      | 178      | 4060-C        | 242                                            |
| 23516-2X    | 178  | 23565         | 180      | 4061          | 242                                            |
| 23516-3GLL  | 179  | 23565-GL      | 180      | 4061-C        | 242                                            |
| 23516-3GLLX | 179  | 23565-PL      | 180      | 4062          | 242                                            |
| 23516-3L    | 179  | 23569         | 180      | 4062-C        | 242                                            |
| 23516-3LX   | 179  | 23569-GL      | 180      | 4063          | 242                                            |
| 23516-3PLL  | 179  | 23569-GLX     | 180      | 4065          | 242                                            |
| 23516-3PLLX | 179  | 23569-PL      | 180      | 4066          | 242                                            |
| 23516-GL    | 178  | 23569-PLX     | 180      | 498-10        | 214                                            |
| 23516-GLL   | 179  | 23569-X       | 180      | 498-4         | 214                                            |
| 23516-GLLX  | 179  | 23572         | 183      | 498-6         | 214                                            |
| 23516-GLX   | 178  | 23572-2       | 183      | 5892000       | 95, 131, 165, 190, 207, 228                    |
| 23516-PL    | 178  | 23572-2GL     | 183      | 5893000       | 95, 131, 165, 190, 207, 228                    |
| 23516-PLL   | 179  | 23572-2GLX    | 183      | 59001         | 166                                            |
| 23516-PLLX  | 179  | 23572-2PL     | 183      | 59001-AE      | 166                                            |
| 23516-PLX   | 178  | 23572-2PLX    | 183      | 59001-AJ      | 167                                            |
| 23516-X     | 178  | 23572-2X      | 183      | 59001-AL      | 167                                            |
| 23524       | 182  | 23572-GL      | 183      | 59001-AM      | 166                                            |
| 23524-GL    | 182  | 23572-GLX     | 183      | 59001-AO      | 167                                            |
| 23524-GLX   | 182  | 23572-PL      | 183      | 59001-AR      | 167                                            |
| 23524-PL    | 182  | 23572-PLX     | 183      | 59001-BM      | 166                                            |
| 23524-PLX   | 182  | 23572-X       | 183      | 59001-CB      | 166                                            |
| 23524-R     | 182  | 23578-HDMI    | 188      | 59001-CE      | 167                                            |
| 23524-X     | 182  | 23578-HDMI-GL | 188      | 59001-CM      | 166                                            |
| 23526-1     | 183  | 23578-HDMI-PL | 188      | 59001-HA      | 167                                            |
| 23526-1GL   | 183  | 23586         | 185      | 59001-NE      | 166                                            |
| 23526-1GLX  | 183  | 23586-2       | 185      | 59001-NM      | 166                                            |
| 23526-1PL   | 183  | 2368          | 65, 104  | 59001-RO      | 166                                            |
| 23526-1PLX  | 183  | 23682-1       | 185, 186 | 59001-VG      | 166                                            |
| 23526-1X    | 183  | 23682-1GL     | 185, 186 | 59001-WE      | 167                                            |
| 23526-2     | 183  | 23682-1GLX    | 185, 186 | 59002         | 166                                            |
| 23526-2GL   | 183  | 23682-1PL     | 185, 186 | 59002-AE      | 166                                            |
| 23526-2GLX  | 183  | 23682-1PLX    | 185, 186 | 59002-AJ      | 167                                            |
| 23526-2PL   | 183  | 23682-1X      | 185, 186 | 59002-AL      | 167                                            |
| 23526-2PLX  | 183  | 23682-2       | 185, 186 | 59002-AM      | 166                                            |
| 23526-2X    | 183  | 23682-2GL     | 185, 186 | 59002-AO      | 167                                            |
| 23526-3     | 183  | 23682-2GLX    | 185, 186 | 59002-AR      | 167                                            |
| 23526-3GL   | 183  | 23682-2PL     | 166      | 59002-BM      | 166                                            |
| 23526-3GLX  | 183  | 23682-2PLX    | 185, 186 | 59002-CB      | 166                                            |
| 23526-3PL   | 183  | 23682-2X      | 185, 186 | 59002-CE      | 167                                            |

Reference index

| Reference   | Page     | Reference   | Page | Reference   | Page |
|-------------|----------|-------------|------|-------------|------|
| 59002-CM    | 166      | 59330-BM    | 160  | 59715-AMC   | 149  |
| 59002-HA    | 167      | 59330-CM    | 160  | 59715-BM    | 149  |
| 59002-NE    | 166      | 59330-NM    | 160  | 59715-BMC   | 149  |
| 59002-NM    | 166      | 59341       | 160  | 59715-C     | 149  |
| 59002-RO    | 166      | 59341-AM    | 160  | 59715-CM    | 149  |
| 59002-VG    | 166      | 59341-BM    | 160  | 59715-CMC   | 149  |
| 59002-WE    | 167      | 59341-CM    | 160  | 59715-NM    | 149  |
| 59003       | 166      | 59341-NM    | 160  | 59715-NMC   | 149  |
| 59003-AE    | 166      | 59560       | 163  | 59716       | 150  |
| 59003-AJ    | 167      | 59705       | 148  | 59716-AM    | 150  |
| 59003-AL    | 167      | 59705-AM    | 148  | 59716-AMC   | 150  |
| 59003-AM    | 166      | 59705-AMC   | 148  | 59716-AMCL  | 150  |
| 59003-AO    | 167      | 59705-AMCL  | 148  | 59716-AML   | 150  |
| 59003-AR    | 167      | 59705-AML   | 148  | 59716-BM    | 150  |
| 59003-BM    | 166      | 59705-BM    | 148  | 59716-BMC   | 150  |
| 59003-CB    | 166      | 59705-BMC   | 148  | 59716-BMCL  | 150  |
| 59003-CE    | 167      | 59705-BMCL  | 148  | 59716-BML   | 150  |
| 59003-CM    | 166      | 59705-BML   | 148  | 59716-C     | 150  |
| 59003-HA    | 167      | 59705-C     | 148  | 59716-CL    | 150  |
| 59003-NE    | 166      | 59705-CBMCL | 148  | 59716-CM    | 150  |
| 59003-NM    | 166      | 59705-CL    | 148  | 59716-CMC   | 150  |
| 59003-RO    | 166      | 59705-CM    | 148  | 59716-CMCL  | 150  |
| 59003-VG    | 166      | 59705-CMC   | 148  | 59716-CML   | 150  |
| 59003-WE    | 167      | 59705-CMCL  | 148  | 59716-IP    | 155  |
| 59004       | 166      | 59705-CML   | 148  | 59716-IP-AM | 155  |
| 59004-AE    | 166      | 59705-IP    | 155  | 59716-IP-CM | 155  |
| 59004-AJ    | 167      | 59705-IP-AM | 155  | 59716-IP-NM | 155  |
| 59004-AL    | 167      | 59705-IP-CM | 155  | 59716-L     | 150  |
| 59004-AM    | 166      | 59705-IP-NM | 155  | 59716-NM    | 150  |
| 59004-AO    | 167      | 59705-L     | 148  | 59716-NMC   | 150  |
| 59004-AR    | 167      | 59705-NM    | 148  | 59716-NMCL  | 150  |
| 59004-BM    | 166      | 59705-NMC   | 148  | 59716-NML   | 150  |
| 59004-CB    | 166      | 59705-NMCL  | 148  | 59717       | 150  |
| 59004-CE    | 167      | 59705-NML   | 148  | 59717-AM    | 150  |
| 59004-CM    | 166      | 59708       | 148  | 59717-AMC   | 150  |
| 59004-HA    | 167      | 59708-AM    | 148  | 59717-AMCL  | 150  |
| 59004-NE    | 166      | 59708-AMC   | 148  | 59717-BM    | 150  |
| 59004-NM    | 166      | 59708-AMCL  | 148  | 59717-BMC   | 150  |
| 59004-RO    | 166      | 59708-BM    | 148  | 59717-BMCL  | 150  |
| 59004-VG    | 166      | 59708-BMC   | 148  | 59717-C     | 150  |
| 59004-WE    | 167      | 59708-BMCL  | 148  | 59717-CL    | 150  |
| 59005       | 166      | 59708-C     | 148  | 59717-CM    | 150  |
| 59005-AE    | 166      | 59708-CL    | 148  | 59717-CMC   | 150  |
| 59005-AL    | 167      | 59708-CM    | 148  | 59717-CMCL  | 150  |
| 59005-AM    | 166      | 59708-CMC   | 148  | 59717-NM    | 150  |
| 59005-AO    | 167      | 59708-CMCL  | 148  | 59717-NMC   | 150  |
| 59005-BM    | 166      | 59708-NM    | 148  | 59717-NMCL  | 150  |
| 59005-CB    | 166      | 59708-NMC   | 148  | 59724       | 153  |
| 59005-CM    | 166      | 59708-NMCL  | 148  | 59724-AM    | 153  |
| 59005-NE    | 166      | 59709       | 149  | 59724-BM    | 153  |
| 59005-NM    | 166      | 59709-AM    | 149  | 59724-CM    | 153  |
| 59005-RO    | 166      | 59709-AMC   | 149  | 59724-NM    | 153  |
| 59005-VG    | 166      | 59709-AMCL  | 149  | 59732       | 153  |
| 59033       | 164      | 59709-AML   | 149  | 59732-AM    | 153  |
| 59033-AM    | 164      | 59709-BM    | 149  | 59732-BM    | 153  |
| 59033-BM    | 164      | 59709-BMC   | 149  | 59732-CM    | 153  |
| 59033-CM    | 164      | 59709-BMCL  | 149  | 59732-E     | 153  |
| 59033-NM    | 164      | 59709-BML   | 149  | 59732-E-AM  | 153  |
| 59068       | 151, 189 | 59709-C     | 149  | 59732-E-CM  | 153  |
| 59068-AM    | 151      | 59709-CL    | 149  | 59732-EI    | 153  |
| 59068-BM    | 151      | 59709-CM    | 149  | 59732-EI-AM | 153  |
| 59068-CM    | 151      | 59709-CMC   | 149  | 59732-EI-CM | 153  |
| 59068-NM    | 151      | 59709-CMCL  | 149  | 59732-NM    | 153  |
| 59144-AM    | 163      | 59709-CML   | 149  | 59732-RD    | 153  |
| 59144-CM    | 163      | 59709-IP    | 155  | 59734       | 164  |
| 59170       | 164      | 59709-IP-AM | 155  | 59734-AM    | 164  |
| 59244-AM    | 163      | 59709-IP-CM | 155  | 59734-BM    | 164  |
| 59244-CM    | 163      | 59709-IP-NM | 155  | 59734-CM    | 164  |
| 59320-IP    | 156      | 59709-L     | 149  | 59734-NM    | 164  |
| 59320-IP-AM | 156      | 59709-NM    | 149  | 59740       | 164  |
| 59320-IP-BM | 156      | 59709-NMC   | 149  | 59740-AM    | 164  |
| 59320-IP-CM | 156      | 59709-NMCL  | 149  | 59740-BM    | 164  |
| 59320-IP-NM | 156      | 59740-CM    | 149  | 59740-CM    | 164  |
| 59330       | 160      | 59715       | 149  | 59740-NM    | 164  |
| 59330-AM    | 160      | 59715-AM    | 149  | 59744       | 164  |

Reference index

| Reference   | Page     | Reference   | Page | Reference   | Page |
|-------------|----------|-------------|------|-------------|------|
| 59744-AM    | 164      | 61002       | 131  | 61466       | 130  |
| 59744-CM    | 164      | 61002-AC    | 131  | 61467       | 130  |
| 59749       | 152      | 61002-BM    | 131  | 61560       | 127  |
| 59749-AM    | 152      | 61002-CH    | 131  | 61560-AC    | 127  |
| 59749-BM    | 152      | 61002-DM    | 131  | 61560-BM    | 127  |
| 59749-CM    | 152      | 61002-NM    | 131  | 61560-CH    | 127  |
| 59749-NM    | 152      | 61002-PM    | 131  | 61560-DM    | 127  |
| 59755       | 128, 163 | 61003       | 131  | 61560-NM    | 127  |
| 59755-AM    | 163      | 61003-AC    | 131  | 61560-PM    | 127  |
| 59755-BM    | 163      | 61003-BM    | 131  | 61705       | 116  |
| 59755-CM    | 163      | 61003-CH    | 131  | 61705-AC    | 116  |
| 59755-NM    | 163      | 61003-DM    | 131  | 61705-ACL   | 116  |
| 59765       | 151      | 61003-NM    | 131  | 61705-BM    | 116  |
| 59765-AM    | 151      | 61003-PM    | 131  | 61705-BML   | 116  |
| 59765-AMC   | 151      | 61004       | 131  | 61705-CH    | 116  |
| 59765-BM    | 151      | 61004-AC    | 131  | 61705-CHL   | 116  |
| 59765-BMC   | 151      | 61004-BM    | 131  | 61705-DM    | 116  |
| 59765-C     | 151      | 61004-CH    | 131  | 61705-DML   | 116  |
| 59765-CM    | 151      | 61004-DM    | 131  | 61705-IP    | 124  |
| 59765-CMC   | 151      | 61004-NM    | 131  | 61705-IP-AC | 124  |
| 59765-IP    | 155      | 61004-PM    | 131  | 61705-IP-BM | 124  |
| 59765-IP-AM | 155      | 61005       | 131  | 61705-IP-CH | 124  |
| 59765-IP-CM | 155      | 61005-AC    | 131  | 61705-IP-DM | 124  |
| 59765-IP-NM | 155      | 61005-BM    | 131  | 61705-IP-NM | 124  |
| 59765-NM    | 151      | 61005-CH    | 131  | 61705-IP-PM | 124  |
| 59765-NMC   | 151      | 61005-DM    | 131  | 61705-L     | 116  |
| 59772       | 154      | 61005-NM    | 131  | 61705-NM    | 116  |
| 59772-AM    | 154      | 61005-PM    | 131  | 61705-NML   | 116  |
| 59772-BM    | 154      | 61033       | 129  | 61705-PM    | 116  |
| 59772-CM    | 154      | 61033-AC    | 129  | 61705-PML   | 116  |
| 59772-NM    | 154      | 61033-BM    | 129  | 61708       | 116  |
| 59778       | 162, 163 | 61033-CH    | 129  | 61708-AC    | 116  |
| 59778-AM    | 162, 163 | 61033-DM    | 129  | 61708-ACL   | 116  |
| 59778-BM    | 162, 163 | 61033-NM    | 129  | 61708-BM    | 116  |
| 59778-CM    | 162, 163 | 61033-PM    | 129  | 61708-BML   | 116  |
| 59778-NM    | 162, 163 | 61068       | 119  | 61708-CH    | 116  |
| 59782       | 161, 162 | 61068-AC    | 119  | 61708-CHL   | 116  |
| 59782-AM    | 161, 162 | 61068-BM    | 119  | 61708-DM    | 116  |
| 59782-BM    | 161, 162 | 61068-CH    | 119  | 61708-DML   | 116  |
| 59782-CM    | 161, 162 | 61068-DM    | 119  | 61708-L     | 116  |
| 59782-IP    | 156      | 61068-NM    | 119  | 61708-NM    | 116  |
| 59782-IP-AM | 156      | 61068-PM    | 119  | 61708-NML   | 116  |
| 59782-IP-BM | 156      | 61144-AC    | 128  | 61708-PM    | 116  |
| 59782-IP-CM | 156      | 61144-CH    | 128  | 61708-PML   | 116  |
| 59782-IP-NM | 156      | 61144-DM    | 128  | 61709       | 117  |
| 59782-NM    | 161, 162 | 61144-PM    | 128  | 61709-AC    | 117  |
| 59814       | 154      | 61170       | 129  | 61709-ACL   | 117  |
| 59814-AM    | 154      | 61170-AC    | 129  | 61709-BM    | 117  |
| 59814-BM    | 154      | 61170-BM    | 129  | 61709-BML   | 117  |
| 59814-CM    | 154      | 61170-CH    | 129  | 61709-CH    | 117  |
| 59814-E     | 154      | 61170-DM    | 129  | 61709-CHL   | 117  |
| 59814-E-AM  | 154      | 61170-NM    | 129  | 61709-DM    | 117  |
| 59814-E-CM  | 154      | 61170-PM    | 129  | 61709-DML   | 117  |
| 59814-IP    | 156      | 61244-AC    | 128  | 61709-L     | 117  |
| 59814-IP-AM | 156      | 61244-CH    | 128  | 61709-NM    | 117  |
| 59814-IP-BM | 156      | 61244-DM    | 128  | 61709-NML   | 117  |
| 59814-IP-CM | 156      | 61244-PM    | 128  | 61709-PM    | 117  |
| 59814-IP-NM | 156      | 61320-IP    | 125  | 61709-PML   | 117  |
| 59814-K     | 154      | 61320-IP-AC | 125  | 61715       | 117  |
| 59814-K-AM  | 154      | 61320-IP-CH | 125  | 61715-AC    | 117  |
| 59814-K-CM  | 154      | 61320-IP-DM | 125  | 61715-BM    | 117  |
| 59814-NM    | 154      | 61320-IP-PM | 125  | 61715-CH    | 117  |
| 59882       | 161, 162 | 61330       | 123  | 61715-DM    | 117  |
| 59882-AM    | 161, 162 | 61330-AC    | 123  | 61715-NM    | 117  |
| 59882-BM    | 161, 162 | 61330-BM    | 123  | 61715-PM    | 117  |
| 59882-CM    | 161, 162 | 61330-CH    | 123  | 61716       | 118  |
| 59882-NM    | 161, 162 | 61330-DM    | 123  | 61716-AC    | 118  |
| 610-B       | 227      | 61330-NM    | 123  | 61716-ACL   | 118  |
| 61001       | 131      | 61330-PM    | 123  | 61716-BM    | 118  |
| 61001-AC    | 131      | 61461       | 130  | 61716-BML   | 118  |
| 61001-BM    | 131      | 61461-PM    | 130  | 61716-CH    | 118  |
| 61001-CH    | 131      | 61462       | 130  | 61716-CHL   | 118  |
| 61001-DM    | 131      | 61462-PM    | 130  | 61716-DM    | 118  |
| 61001-NM    | 131      | 61463       | 130  | 61716-DML   | 118  |
| 61001-PM    | 131      | 61463-PM    | 130  | 61716-IP    | 124  |

Reference index

| Reference    | Page     | Reference   | Page     | Reference  | Page                   |
|--------------|----------|-------------|----------|------------|------------------------|
| 61716-IP-AC  | 124      | 61749-AC    | 120      | 6290-M16   | 242                    |
| 61716-IP-ACL | 124      | 61749-BM    | 120      | 6290-M20   | 242                    |
| 61716-IP-BM  | 124      | 61749-CH    | 120      | 6290-M25   | 242                    |
| 61716-IP-BML | 124      | 61749-DM    | 120      | 6290-M32   | 242                    |
| 61716-IP-CH  | 124      | 61749-NM    | 120      | 6290-M40   | 242                    |
| 61716-IP-CHL | 124      | 61749-PM    | 120      | 6290-M50   | 242                    |
| 61716-IP-DM  | 124      | 61755-AC    | 128      | ç61732-EI  | 121                    |
| 61716-IP-DML | 124      | 61755-BM    | 128      | CT-71013   | 234                    |
| 61716-IP-L   | 124      | 61755-CH    | 128      | CT-71014   | 234                    |
| 61716-IP-NM  | 124      | 61755-DM    | 128      | CT-71015   | 234                    |
| 61716-IP-NML | 124      | 61755-NM    | 128      | CT-71023   | 234                    |
| 61716-IP-PM  | 124      | 61755-PM    | 128      | CT-71024   | 234                    |
| 61716-IP-PML | 124      | 61765       | 119      | CT-71025   | 234                    |
| 61716-L      | 118      | 61765-AC    | 119      | CT-71213   | 233                    |
| 61716-NM     | 118      | 61765-BM    | 119      | CT-71214   | 233                    |
| 61716-NML    | 118      | 61765-CH    | 119      | CT-71215   | 233                    |
| 61716-PM     | 118      | 61765-DM    | 119      | CT-71223   | 233                    |
| 61716-PML    | 118      | 61765-IP    | 124      | CT-71224   | 233                    |
| 61717        | 118      | 61765-IP-AC | 124      | CT-71225   | 233                    |
| 61717-AC     | 118      | 61765-IP-BM | 124      | CT-71363   | 232                    |
| 61717-ACL    | 118      | 61765-IP-CH | 124      | CT-71367   | 232                    |
| 61717-BM     | 118      | 61765-IP-DM | 124      | CT-71473   | 232                    |
| 61717-BML    | 118      | 61765-IP-NM | 124      | CT-71477   | 232                    |
| 61717-CH     | 118      | 61765-IP-PM | 124      | CT-71483   | 232                    |
| 61717-CHL    | 118      | 61765-NM    | 119      | CT-71487   | 232                    |
| 61717-DM     | 118      | 61765-PM    | 119      | CT-73303   | 233                    |
| 61717-DML    | 118      | 61772       | 122      | CT-73306   | 233                    |
| 61717-L      | 118      | 61772-AC    | 122      | CT-73413   | 233                    |
| 61717-NM     | 118      | 61772-BM    | 122      | CT-73416   | 233                    |
| 61717-NML    | 118      | 61772-CH    | 122      | CT-73423   | 233                    |
| 61717-PM     | 118      | 61772-DM    | 122      | CT-73426   | 233                    |
| 61717-PML    | 118      | 61772-NM    | 122      | CT-75302   | 234                    |
| 61732        | 121      | 61772-PM    | 122      | CT-75412   | 234                    |
| 61732-AC     | 121      | 61778       | 127      | CT-75422   | 234                    |
| 61732-BM     | 121      | 61778-AC    | 127      | CT-77303   | 234                    |
| 61732-CH     | 121      | 61778-BM    | 127      | CT-77306   | 234                    |
| 61732-CHL    | 121      | 61778-CH    | 127      | CT-77413   | 234                    |
| 61732-EI-AC  | 121      | 61778-DM    | 127      | CT-77416   | 234                    |
| 61732-EI-BM  | 121      | 61778-NM    | 127      | CT-77423   | 234                    |
| 61732-EI-CH  | 121      | 61778-PM    | 127      | CT-77426   | 234                    |
| 61732-EI-DM  | 121      | 61782       | 126, 127 | CT-9945    | 235                    |
| 61732-EI-NM  | 121      | 61782-AC    | 126, 127 | CT-9946    | 232                    |
| 61732-EI-PM  | 121      | 61782-BM    | 126, 127 | CT-9947    | 232                    |
| 61732-NM     | 121      | 61782-CH    | 126, 127 | CT-9948    | 233                    |
| 61732-PM     | 121      | 61782-DM    | 126, 127 | CT-9949    | 233                    |
| 61732-RD     | 121      | 61782-NM    | 126, 127 | CT-9950    | 233                    |
| 61734        | 129      | 61782-PM    | 126, 127 | CT-9951    | 233                    |
| 61734-AC     | 129      | 6181-IP-BM  | 125      | CT-9952    | 234                    |
| 61734-BM     | 129      | 61814       | 122      | CT-9953    | 234                    |
| 61734-CH     | 129      | 61814-AC    | 122      | CT-9954    | 233                    |
| 61734-DM     | 129      | 61814-BM    | 122      | CT-9955    | 233                    |
| 61734-NM     | 129      | 61814-CH    | 122      | CT-9956    | 233                    |
| 61734-PM     | 129      | 61814-DM    | 122      | CT-9957    | 233                    |
| 61740        | 129      | 61814-EI    | 122      | CT-9958    | 234                    |
| 61740-AC     | 129      | 61814-EI-AC | 122      | CT-9959    | 234                    |
| 61740-BM     | 129      | 61814-EI-BM | 122      | CT-9962    | 235                    |
| 61740-CH     | 129      | 61814-EI-CH | 122      | CT-9963    | 232                    |
| 61740-DM     | 129      | 61814-EI-DM | 122      | CT-9964    | 232                    |
| 61740-NM     | 129      | 61814-EI-NM | 122      | CT-9967    | 232                    |
| 61740-PM     | 129      | 61814-EI-PM | 122      | CT-9968    | 232                    |
| 61744        | 130      | 61814-IP    | 125      | CT-9971    | 232                    |
| 61744-1      | 128, 130 | 61814-IP-AC | 125      | CT-9972    | 232                    |
| 61744-1AC    | 128, 130 | 61814-IP-CH | 125      | CT-9975    | 232                    |
| 61744-1BM    | 128, 130 | 61814-IP-DM | 125      | CT-9976    | 232                    |
| 61744-1CH    | 128, 130 | 61814-IP-NM | 125      | CT-9979    | 235                    |
| 61744-1DM    | 128, 130 | 61814-IP-PM | 125      | CT-9980    | 235                    |
| 61744-1NM    | 128, 130 | 61814-NM    | 122      | CT-9981    | 232                    |
| 61744-1PM    | 128, 130 | 61814-PM    | 122      | CT-9982    | 232                    |
| 61744-AC     | 130      | 61882       | 126, 127 | CT-9985    | 232                    |
| 61744-BM     | 130      | 61882-AC    | 126, 127 | CT-9986    | 232                    |
| 61744-CH     | 130      | 61882-BM    | 126, 127 | CT-9990    | 235                    |
| 61744-DM     | 130      | 61882-CH    | 126, 127 | CT-9991    | 235                    |
| 61744-NM     | 130      | 61882-DM    | 126, 127 | DIP-RLC    | 67, 120, 152, 181, 199 |
| 61744-PM     | 130      | 61882-NM    | 126, 127 | EF-23924-4 | 184                    |
| 61749        | 120      | 61882-PM    | 126, 127 | I-062      | 238                    |



Reference index

| Reference       | Page             | Reference    | Page                    |
|-----------------|------------------|--------------|-------------------------|
| I-0622          | 238              | SM59705-CMC  | 28, 29, 157, 158        |
| I-2302          | 239              | SM59705-NM   | 28, 29, 157, 158        |
| I-2303          | 239              | SM59705-NMC  | 28, 29, 157, 158        |
| I-2316          | 251              | SM59724      | 29, 158                 |
| I-262           | 239              | SM59724-AM   | 28, 29, 157, 158        |
| I-362           | 238              | SM59724-BM   | 28, 29, 157, 158        |
| I-3622          | 238              | SM59724-CM   | 28, 29, 157, 158        |
| I-6201          | 243              | SM59724-NM   | 28, 29, 157, 158        |
| I-6202          | 243              | SM59739      | 30, 159                 |
| I-6202-1        | 246              | SM59739-2    | 30, 159                 |
| I-6203          | 243              | SM59739-2AM  | 30, 159                 |
| I-6203-1        | 246              | SM59739-2BM  | 30, 159                 |
| I-6204          | 243              | SM59739-2CM  | 30, 159                 |
| I-6204-1        | 246              | SM59739-2NM  | 30, 159                 |
| I-6204-2        | 246              | SM59739-AM   | 30, 159                 |
| I-6205          | 243              | SM59739-BM   | 30, 159                 |
| I-6205-1        | 246              | SM59739-CM   | 30, 159                 |
| I-6207          | 243              | SM59739-NM   | 30, 159                 |
| IC-16-EXT       | 224              | SM59740      | 30, 159                 |
| IH-1            | 223              | SM59740-1    | 30, 159                 |
| IH-1-ASTRO-WI   | 223              | SM59740-1AM  | 30, 159                 |
| IH-1-ASTRO-WI/B | 223              | SM59740-1BM  | 30, 159                 |
| IH-2            | 223              | SM59740-1CM  | 30, 159                 |
| IH-2-ASTRO-WI   | 223              | SM59740-1NM  | 30, 159                 |
| IHA-1-DIA       | 223              | SM59740-AM   | 30, 159                 |
| MI-16           | 224              | SM59740-BM   | 30, 159                 |
| MN5-UNI         | 225              | SM59740-CM   | 30, 159                 |
| MV31            | 225              | SM59740-NM   | 30, 159                 |
| MV54            | 225              | SM59765      | 29, 158                 |
| MV54N           | 225              | SM59765-AM   | 28, 29, 157, 158        |
| MV55            | 225              | SM59765-AMC  | 28, 29, 157, 158        |
| MV55N           | 225              | SM59765-BM   | 28, 29, 157, 158        |
| NX18506         | 29, 158          | SM59765-BMC  | 28, 29, 157, 158        |
| NX18524         | 29, 158          | SM59765-C    | 29, 158                 |
| NX18565         | 29, 158          | SM59765-CM   | 28, 29, 157, 158        |
| NX21545         | 29, 158          | SM59765-CMC  | 28, 29, 157, 158        |
| NX59906         | 28, 157          | SM59765-NM   | 28, 29, 157, 158        |
| NX59924         | 28, 157          | SM59765-NMC  | 28, 29, 157, 158        |
| NX59939         | 30, 159          | T-13         | 250                     |
| NX59940         | 30, 159          | T-13-1       | 247                     |
| NX59949         | 28, 157          | T-13-2       | 247                     |
| NX59965         | 28, 157          | T-13-3       | 247                     |
| NXDAU-32        | 31               | T-13-4       | 247                     |
| NXDIM-1         | 31               | T-13-5       | 247                     |
| NXDS-2          | 31               | T-13-6       | 247                     |
| NXIN-4          | 31               | T-13-7       | 247                     |
| NXKF-4          | 32               | T-13-8       | 247                     |
| NXLAN-204       | 32               | T-15         | 250                     |
| NXMB-1          | 32               | T-15-1       | 248                     |
| NXOS-1          | 31               | T-15-2       | 248                     |
| NXPD-1          | 32               | T-15-3       | 248                     |
| NXSB-2          | 31               | T-15-4       | 248                     |
| NXSF-1          | 32               | T-15-5       | 248                     |
| NXWDC-1         | 32               | T-15-6       | 248                     |
| PCP9135-01      | 163              | T-16         | 250                     |
| PCP9135-02      | 163              | T-17         | 250                     |
| PCP9135-10      | 163              | T-17-1       | 249                     |
| PCP9135-12      | 163              | T-17-2       | 249                     |
| RE-0226         | 251              | T-17-3       | 249                     |
| RE-0227         | 251              | T-904        | 251                     |
| RE-0228         | 251              | T-905        | 251                     |
| RE-0229         | 251              | TE-116-UNI   | 224                     |
| RE-116-R        | 224              | TM-116       | 222                     |
| RE-308-R        | 224              | TM-116-UNI   | 222                     |
| RE-316-R        | 224              | TM-116-UNI-M | 222                     |
| SM-1N           | 225              | TM-308-UNI   | 222                     |
| SM-2            | 225              | TMA-101-UNI  | 222                     |
| SM-3            | 225              | TMA-102-UNI  | 222                     |
| SM59705         | 29, 158          | TME-2H-UNI   | 222                     |
| SM59705-AM      | 28, 29, 157, 158 | TME-2T-UNI   | 222                     |
| SM59705-AMC     | 28, 29, 157, 158 | TMP-3H       | 118, 150, 180, 198, 222 |
| SM59705-BM      | 28, 29, 157, 158 | TMP-4H       | 118, 150, 180, 198, 222 |
| SM59705-BMC     | 28, 29, 157, 158 | TX82/BL      | 163                     |
| SM59705-C       | 29, 158          | TX82/GR      | 163                     |
| SM59705-CM      | 28, 29, 157, 158 | TX82/MF      | 163                     |

BJC



[Visit our website](#)

# BJC


Fábrica Electrotécnica Josa, SAU  
Av. de la Llana, 95  
08191 Rubí (Barcelona)  
Spain  
+34 935 610 500

Sales Administration  
900 67 00 77  
[ventas@bjc.es](mailto:ventas@bjc.es)

Customer Service  
935 610 526  
[sac@bjc.es](mailto:sac@bjc.es)

Technical Support  
900 67 00 68  
[sat@bjc.es](mailto:sat@bjc.es)

[www.bjc.es/en](http://www.bjc.es/en)



Insert series



Smart Home



Relays



Assorted material



Cetact



Watertight mounting boxes, connection boxes and accessories



Mounting and connection boxes